

# Power Control of a Hybrid Wind Generator for Distributed Power Generation and Grid Integration

J.Alla Bagash, T.Prathap, G.Karthik

**Abstract**— In this paper A dc-coupled wind/hydrogen/super capacitor hybrid power system is proposed is control the system and is to coordinate these different sources, particularly their power exchange, in order to make controllable the generated power. The generated power does not depend on the grid requirement but entirely on the fluctuant wind condition. As a result, an active wind generator can be built to provide some ancillary services to the grid. The control system should be adapted to integrate the power management strategies. Two power management strategies are presented and compared experimentally. We found that the “source-following” strategy has better performances on the grid power regulation than the “grid-following” strategy.

**Index Terms**—Distributed power, energy management, hybridpower system (HPS), power control, wind generator (WG).

## I. INTRODUCTION

Renewable energy sources (RES) and distributed generations (DGs) have attracted special attention all over the world in order to reach the following two goals:

- 1) The security of energy supply by reducing the dependence on imported fossil fuels;
- 2) The reduction of the emission of greenhouse gases (e.g., CO<sub>2</sub>) from the burning of fossil fuels.

Other than their relatively low efficiency and high cost, the controllability of the electrical production is the main drawback of renewable energy generators, like wind turbines and photovoltaic panels, because of the uncontrollable meteorological conditions. In consequence, their connection into the utility network can lead to grid instability or even failure if they are not properly controlled. Moreover, the standards for interconnecting these systems to the utility become more and more critical and require the DG systems to provide certain services, like frequency and voltage regulations of the local grid. Wind power is considered in this paper. Wind energy is the world’s fastest growing energy source, expanding globally at a rate of 25%–35% annually over the last decade (Fig.1).

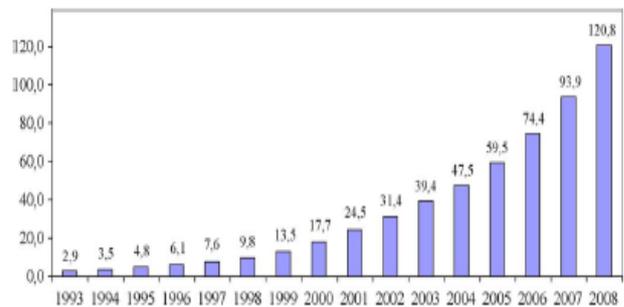


Fig. 1. Total wind power (in giga watts) installed in the world since 1993.

Hybrid power systems (HPS) are proposed to overcome these problems with the following two innovative improvements.

- 1) Energy storage systems are used to compensate or absorb the difference between the generated wind power and the required grid power.
- 2) Power management strategies are implemented to control the power exchange among different sources and to provide some services to the grid.

Hydrogen technologies, combining fuel cells (FCs) and electrolyzes (ELs) with hydrogen tanks are interesting for long term energy storage because of the inherent high mass–energy density. In the case of wind energy surplus, the EL converts the excess energy into H<sub>2</sub> by electrochemical reaction. The produced H<sub>2</sub> can be stored in the hydrogen tank for future reutilization. In the case of wind energy deficit, the stored electrolytic H<sub>2</sub> can be reused to generate electricity by an FC to meet the energy demand of the grid. Thus, hydrogen, as an energy carrier, contributes directly to the reduction of dependence on imported fossil fuel. According to researchers, wind electrolysis is a very attractive candidate for an economically viable renewable hydrogen production system.

## II. HPS AND CONTROL SYSTEM

### A. Structure of HPS:

In this paper, we use a dc-coupled structure in order to decouple the grid voltages and frequencies from other sources. All sources are connected to a main dc bus before being connected to the grid through a main inverter (Fig. 2). Each source is electrically connected with a

Revised Manuscript Received on 30 May 2013.

\* Correspondence Author

J.Alla Bagash, Assoc.Prof,Electrical and Electronics Engineering, Malineni Lakshmaiah Engineering , Kakinada University, Prakasam District, India.

T.Prathap, Asst.Prof, Electrical and Electronics Engineering, Malineni Lakshmaiah Engineering, Kakinada University, Prakasam District, India.

G.Karthik, Electrical and Electronics Engineering, Malineni Lakshmaiah Engineering, Kakinada University, Prakasam District, India.

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an open access article under the CC-BY-NC-ND license <http://creativecommons.org/licenses/by-nc-nd/4.0/>

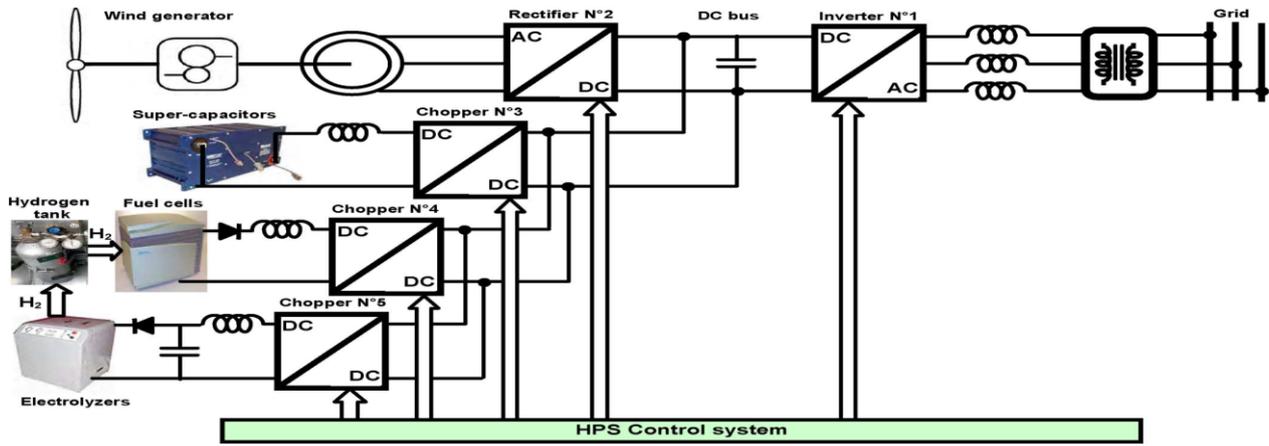


Fig. 2. Structure of the studied wind/hydrogen/SC HPS.

Power-electronic converter in order to get possibilities for power control actions. Moreover, this HPS structure and its global control system can also be used for other combinations of sources.

**B. Structure of Control System:**

Power converters introduce some control inputs for power conversion. In this case, the structure of the control system can be divided into different levels (Fig. 3).

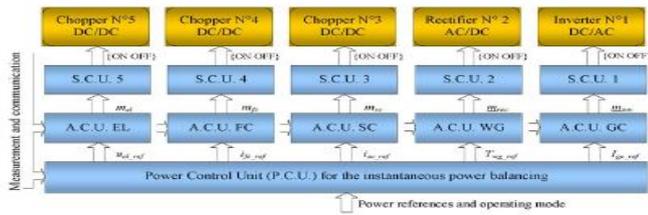


Fig.3.Hierarchical control structure of the HPS

The switching control unit (SCU) is designed for each power converter. In an SCU, the drivers with optocouplers generate the transistor’s ON/OFF signals from the ideal states of the switching function {0, 1}, and the modulation technique (e.g., pulse width modulation) determines the switching functions from the modulation functions (m).

The automatic control unit (ACU) is designed for each energy source and its power conversion system. In an ACU, the control algorithms calculate the modulation functions (m) for each power converter through the regulation of some physical quantities according to their reference values.

The power control unit (PCU) is designed to perform the instantaneous power balancing of the entire HPS in order to satisfy the grid requirements. These requirements are real and reactive-power references, which are obtained from the secondary control center and from references of droop controllers. In a PCU, some power-balancing algorithms are implemented to coordinate the power flows of different energy sources. The different power-balancing algorithms correspond to a number of possible operating modes of the HPS and can be gathered.

The purpose of this paper is to present the power-balancing strategies in the PCU. In order to focus on the power-balancing strategies of the HPS, the control schemes of the power conversion systems through different power converters will not be detailed in this paper. However, some explanations of the ACUs are given in the following paragraphs in order to make the controllable variables of the power conversion systems appear.

**C. ACU**

The control schemes in the ACUs are shown in Fig. 4 with block diagrams.

- 1) The EL power conversion system is controlled by setting the terminal voltage ( $u_{el}$ ) equal to a prescribed reference ( $u_{el\_ref}$ ) through the dc chopper N°5. The EL stack is considered as an equivalent current source ( $i_{el}$ ).
- 2) The FC power conversion system is controlled with a reference of the FC current ( $i_{fc\_ref}$ ) through the dc chopper N°4. The FC stack is considered as an equivalent voltage source ( $u_{fc}$ ).
- 3) The SC power conversion system is controlled with a current reference ( $i_{sc\_ref}$ ) through the dc chopper N°3. The SC bank is considered as an equivalent voltage source ( $u_{sc}$ ).
- 4) The wind energy conversion system is controlled with a reference of the gear torque ( $T_{gear\_ref}$ ) by the three-phase rectifier N°2.
- 5) The grid connection system consists of a dc-bus capacitor and a grid power conversion system. The grid power conversion system is controlled with line-current references ( $i_{l\_ref}$ ) by the three-phase inverter N°1, because the grid transformer is considered as an equivalent voltage source ( $u_{grid}$ ).

The dc-bus voltage is described as

$$C_{dc} \frac{d u_{dc}}{dt} = i_{dc} \tag{1}$$

In order to control the dc-bus voltage, a voltage controller must be used. The output of the voltage controller is a current reference  $i_{dc\_ref}$  (Fig. 4).

III. PCU

**A. Layout of PCU:**

The power modeling of the HPS can be divided into two levels: the power calculation level and the power flow level (Fig. 5). Thus, the PCU is also divided into two levels: the power control level and the power sharing level.

The PCU enables one to calculate references for the ACU from power references. The power sharing level coordinates the power flow exchanges among the different energy sources with different power-balancing strategies. They are presented here in detail with the help of the Multilevel Representation (Fig. 5).



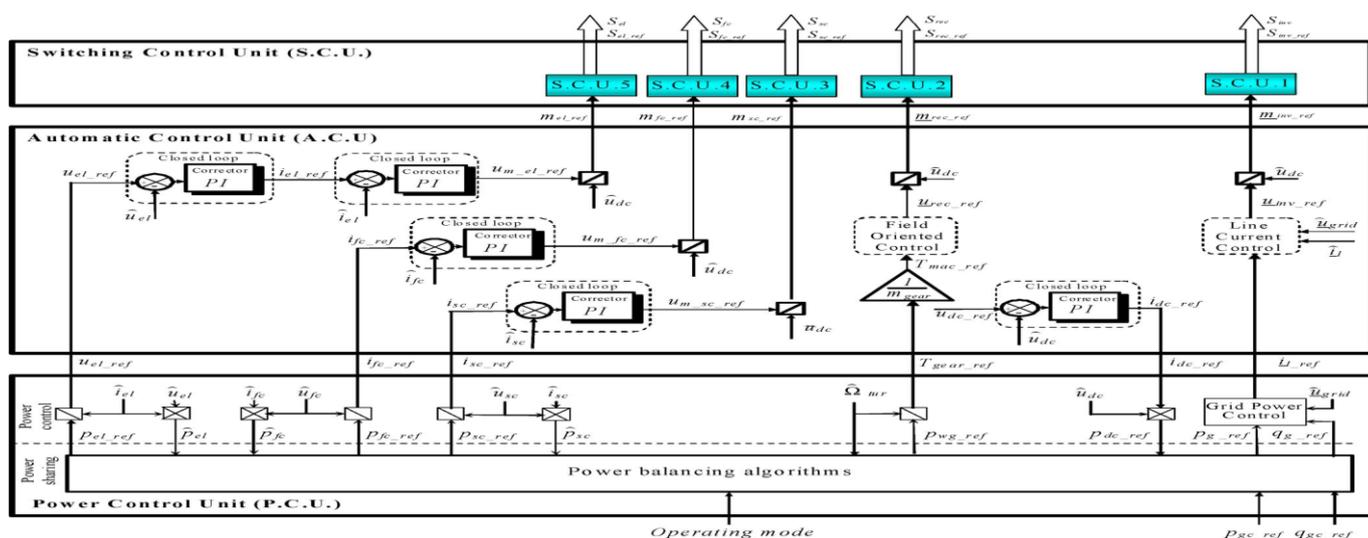


Fig. 4. Modeling and control of the HPS by the Energetic Macroscopic Representation

**B. Power Control Level:**

The power exchanges with various sources are controlled only via the related five references ( $u_{el\_ref}$ ,  $i_{fc\_ref}$ ,  $i_{sc\_ref}$ ,  $T_{gear\_ref}$ , and  $i_{l\_ref}$  in Fig. 5). Therefore, the expressions of the powers should be deduced in order to obtain these power references (Table I). Only the sources' powers and the exchanged power with the dc-bus capacitor are taken into account here. For the energy storage systems, the powers are calculated by multiplying the measured currents and the measured voltages (Int3, Int4, and Int5 in Table I). The references of the controllable variables are obtained by dividing the power reference with the measured current or the measured voltages (Int3c, Int4c, and Int5c in Table I).

TABLE I. SUMMARY OF EQUATIONS FOR POWER CALCULATION

	Power calculation	Power control
DC	Int0: $p_{dc} = u_{dc} i_{dc}$	Int0e: $p_{dc\_ref} = u_{dc} i_{dc\_ref}$
GC	Int1: $\begin{cases} p_g = u_{13} i_1 + u_{23} i_2 \\ q_g = \sqrt{3} u_{13} i_1 - u_{23} i_2 \end{cases}$	Int1c: $\begin{cases} i_{1\_ref} = \frac{(2u_{13} - u_{23})p_{g\_ref} + \sqrt{3}u_{23}q_{g\_ref}}{2u_{13}^2 - 2u_{13}u_{23} + 2u_{23}^2} \\ i_{2\_ref} = \frac{(2u_{23} - u_{13})p_{g\_ref} - \sqrt{3}u_{13}q_{g\_ref}}{2u_{13}^2 - 2u_{13}u_{23} + 2u_{23}^2} \end{cases}$
WG	Int2: $p_{wg} = \Omega_{gear} T_{gear}$	Int2c: $T_{gear\_ref} = p_{wg\_ref} / \Omega_{gear}$
SC	Int3: $p_{sc} = u_{sc} i_{sc}$	Int3c: $i_{sc\_ref} = p_{sc\_ref} / u_{sc}$
FC	Int4: $p_{fc} = i_{fc} u_{fc}$	Int4c: $i_{fc\_ref} = p_{fc\_ref} / u_{fc}$
EL	Int5: $p_{el} = i_{el} u_{el}$	Int5c: $u_{el\_ref} = p_{fc\_ref} / i_{fc}$

The output of the dc-bus voltage control loop is the current reference ( $i_{dc\_ref}$ ) of the dc-bus capacitor, and its product with the measured dc-bus voltage gives the power

reference ( $p_{dc\_ref}$ ) for the dc-bus voltage regulation (Int0e). The powers, which are exchanged with the grid, can be calculated with the "two-wattmeter" method (Int1 and Int1c in Table I). In order to focus on the power exchanges with the different sources around the dc bus, the instantaneously exchanged power with the choke, the losses in the filters, and the losses in the power converters are neglected.

**C. Power Sharing Level:**

The power sharing level is used to implement the power balancing strategies in order to coordinate the various sources in the HPS (Fig. 5). It plays a very important role in the control system, because the power exchanges lead directly to the stability of the HPS and impact the dc-bus voltage ( $u_{dc}$ ).

$$dE_{dc}/dt = C_{dc} u_{dc} / dc = p_{dc} = p_{wg} + p_{sc} + p_{fc} - p_{el} - p_g \dots (2)$$

With

- $E_{dc}$  stored energy in the dc-bus capacitor;
- $p_{dc}$  resulted power into the dc-bus capacitor;
- $p_{wg}$  generated power from the WG;
- $p_{fc}$  generated power from the FC;
- $p_{sc}$  exchanged power with the SC;
- $p_{el}$  consumed power by the EL;
- $p_g$  delivered power into the grid from the dc bus.

According to the power exchange, the power flows inside this HPS are modeled with four equations:

$$Pow1: p_g = p_{sour} - p_{dc} \dots (3)$$

$$Pow2: p_{sour} = p_{sto} + p_{wg} \dots (4)$$

$$Pow3: p_{sto} = p_{H2} + p_{sc} \dots (5)$$

$$Pow4: p_{H2} = p_{fc} - p_{el} \dots (6)$$

With

- $p_{sour}$  "source" total power arriving at the dc bus;
- $p_{sto}$  "storage" total power arriving at the dc bus;
- $p_{H2}$  "hydrogen" total power arriving at the dc bus.

In this wind/hydrogen/SC HPS, five power-electronic converters are used to regulate the power transfer with each source. According to a chosen power flow, the following two power balancing strategies can be implemented.



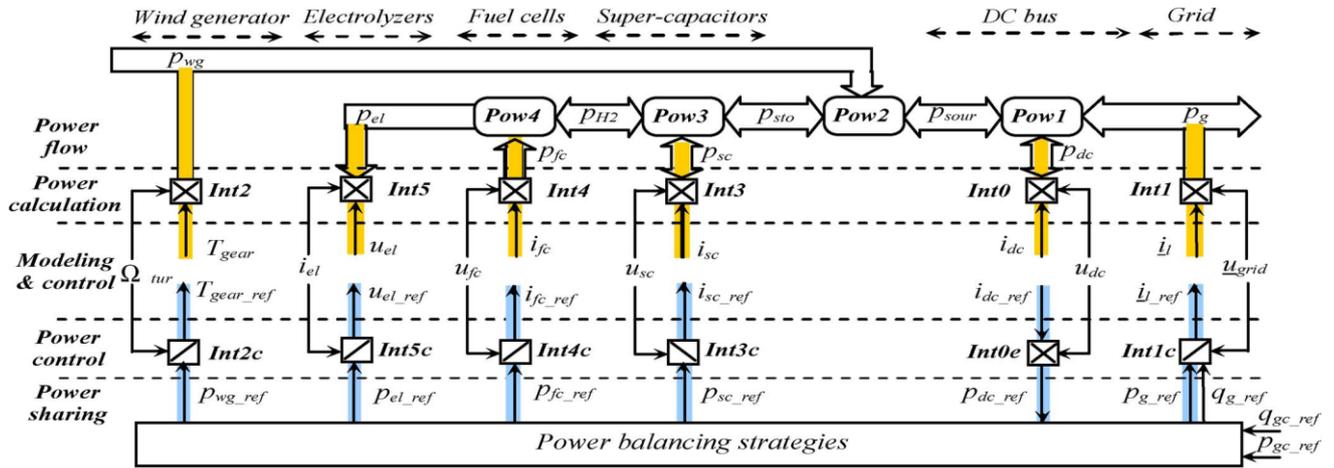


Fig. 5. Multilevel representation of the power modeling and control of the HPS.

- 1) The **grid-following strategy** uses the line-current loop to regulate the dc-bus voltage.
- 2) The **source-following strategy** uses the line-current loop to control the grid active power, and the dc-bus voltage is regulated with the WG and storage units.

IV. POWER-BALANCING STRATEGIES

A. Grid-Following Strategy

With the grid-following strategy, the dc-bus voltage is regulated by adjusting the exchanged power with the grid, while the WG works in MPPT strategies [27]. In Fig. 6, the dc-bus voltage control is shown by a closed loop ( $p_{dc\_ref} \rightarrow p_{g\_ref} \rightarrow p_g \rightarrow p_{dc}$ ). Thus, the required power for the dc-bus voltage regulation ( $p_{dc\_ref}$ ) is used to estimate the grid power reference ( $p_{g\_ref}$ )

**Pow1e** :  $p_{g\_ref} = \sim p_{sour} - \sim p_{dc\_ref}$  ..... (7)

The source total power ( $p_{sour}$ ) is a disturbance and should also be taken into account with the estimated wind power and the sensed total storage power.

**Pow2e** :  $\sim p_{sour} = \sim p_{wg} + \sim p_{sto}$ ..... (8)

The energy storage systems help the wind energy conversion system satisfy the power references, which are asked by the micro grid operator

**Pow3e** :  $\sim p_{sto} = \sim p_{sc} + \sim p_{H2}$ ..... (9)

**Pow4e** :  $\sim p_{H2} = \sim p_{fc} - \sim p_{el}$ ..... (10)

In steady state, the dc-bus voltage is regulated, and the averaged power exchange with the dc-bus capacitor can be considered as zero in (3). Hence, in steady state, the grid power ( $p_g$ ) is equal to the total power from the sources ( $p_{sour}$ ). If the microgrid system operator sets a power requirement ( $p_{gc\_ref}$ ), it must be equal to the sources' power reference ( $p_{sour\_ref}$ ), as shown in Fig. 6

**Pow1c** :  $p_{sour\_ref} = p_{g\_ref} = p_{gc\_ref}$  ..... (11)

In order to help the wind energy conversion system respect the active-power requirement, the energy storage systems should be coordinated to supply or absorb the difference between this power requirement ( $p_{gc\_ref}$ ) and the fluctuant wind power ( $p_{wg}$ ), as shown in Fig. 6

**Pow2c** :  $p_{sto\_ref} = p_{sour\_ref} = \sim p_{wg}$ ..... (12)

Among the energy storage systems, the FCs and the ELs are the main energy exchangers because a large quantity of hydrogen can be stored for enough energy availability. For efficiency reasons, the FC and the EL should not work at the

same time. The activation of the FC or the activation of the EL depends on the sign of the reference ( $p_{H2\_ref}$ ). Thus, a selector assigns the power reference ( $p_{H2\_ref}$ ) to the FC ( $p_{fc\_ref}$ ) or to the EL ( $p_{el\_ref}$ ) according to the sign of  $p_{H2\_ref}$  (Fig. 6)

B. Source-Following Strategy

The total power ( $p_{sour}$ ) from the energy storage and the WG can also be used to provide the necessary dc power ( $p_{dc}$ ) for the dc-bus voltage regulation (Fig. 8) [27]. In this case, the necessary total power reference ( $p_{sour\_ref}$ ) must be calculated by taking into account the required power for the dc-bus Voltage regulation ( $p_{dc\_ref}$ ) and the measured grid power ( $p_g$ ) as disturbance input by using the inverse equation of **Pow1** (Fig. 8)ds on the sign of the reference ( $p_{H2\_ref}$ ). Thus, a selector assigns the power reference ( $p_{H2\_ref}$ ) to the FC ( $p_{fc\_ref}$ ) or to the EL ( $p_{el\_ref}$ ) according to the sign of  $p_{H2\_ref}$  (Fig. 6)

**Pow4c** :

if:  $p_{H2\_ref} > \epsilon$ ,  $p_{fc\_ref} = p_{H2\_ref}$  ;  $p_{el\_ref} = 0$

if:  $|p_{H2\_ref}| \leq \epsilon$ ,  $p_{fc\_ref} = 0$ ;  $p_{el\_ref} = 0$

if:  $p_{H2\_ref} < -\epsilon$ ,  $p_{fc\_ref} = 0$ ;

$p_{el\_ref} = |p_{H2\_ref}| / \dots \dots \dots (13)$

However, the power reference ( $p_{sto\_ref}$ ) is a fast-varying quantity due to the fluctuant wind power ( $p_{wg}$ ) and the varying grid power ( $p_g$ ). In order to avoid the fast-chattering problem when it is close to zero, it should be slowed down. Moreover, the FCs and the ELs have relatively slow power dynamics, and fast-varying power references are not welcome for their operating lifetime. Therefore, a low-pass filter (LPF) with a slope limiter should be added (Fig. 6)

**Pow3c**:  $p_{H2\_ref} = 1/1 + \tau s(p_{sto\_ref}) \dots \dots \dots (14)$

where  $\tau$  is the time constant of the LPF and should be set large enough by taking into account the power dynamics of the FCs and the ELs, as well as the size of the SCs. The SCs are not made for a long-term energy backup unit because they have limited energy storage capacities due to their low energy density. However, they have very fast power dynamics and can supply fast-varying powers and power peaks. They can be used as an auxiliary power system of the FCs and ELs to fill the power gaps during their transients



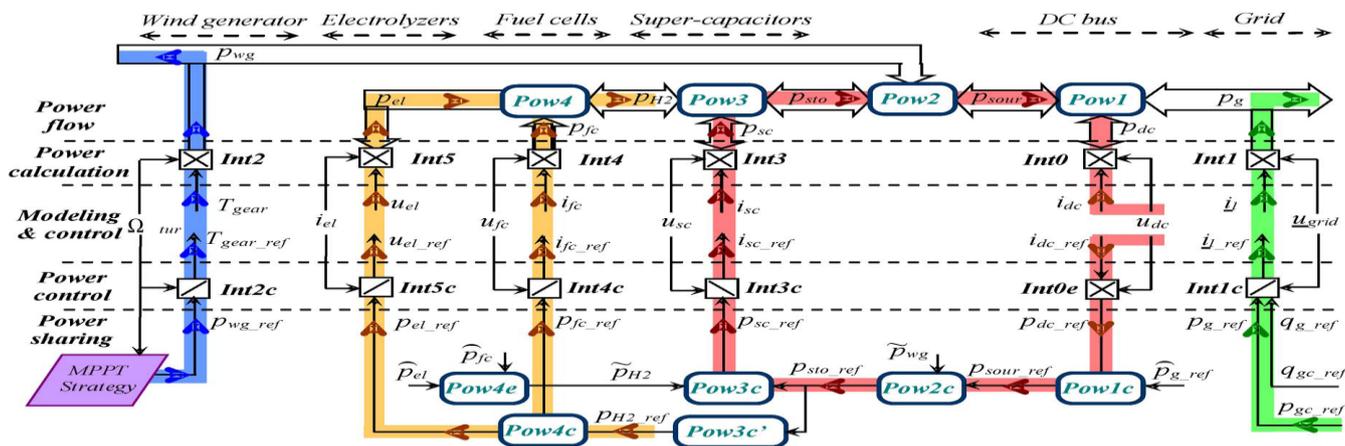


Fig. 8. Multilevel representation of the source-following strategy.

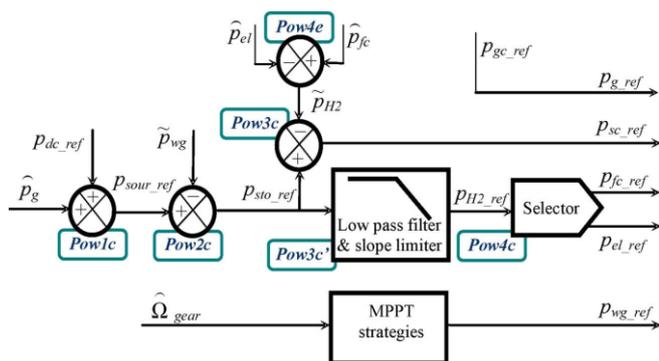


Fig. 9. Block diagram of the source-following strategy

strategies are tested and compared, respectively. With this experimental test bench, it is possible to apply our proposed hierarchical control system for the active generator and to test it with the developed power-balancing strategies.

**B. Power Profile of Different Sources**

Two tests are performed experimentally for both strategies, respectively. The same fluctuant wind power profile is used during 150 s (Fig. 11). The active-power requirement from the micro grid is assumed to be  $p_{gc\_ref} = 600W$ . Similar power profiles are obtained for the energy storage systems (Fig. 11). When the generated wind power is more than 600 W, the EL is activated to absorb the power difference, but when the generated wind power is less than 600 W, the FC is activated to compensate the power difference. Since the power dynamics of the FCs and the EL are limited by an LPF with a 5-s time constant, they are not able to filter the fast fluctuations of the wind power. Therefore, the SCs supply or absorb the power difference.

**C. Grid Following Strategy**

In the grid-following strategy, the dc-bus voltage is well regulated around 400 V by the grid power conversion system (Fig. 12). The energy storage systems help the WG supply the micro grid power requirement ( $p_{sour} = p_{gc\_ref} = 600 W$ ). Because of the different power losses in the filters and power converters, the grid active power is slightly less than the micro grid's requirement ( $p_g < p_{gc\_ref} = 600 W$ ).

**D. Source-Following Strategy**

In the grid-following strategy, the energy storage systems are controlled to supply or absorb the necessary powers in order to maintain the dc-bus voltage (around 400 V) against

the fluctuant wind power (Fig. 13). The grid active power is also regulated and is equal to the microgrid's requirement, because the line-current control loop regulates directly the grid powers ( $p_g = p_{gc\_ref} = 600 W$ ). Therefore, the source following strategy has better performances on the grid power regulation than the grid-following strategy, and it can provide ancillary services according to the micro grid's requirements.

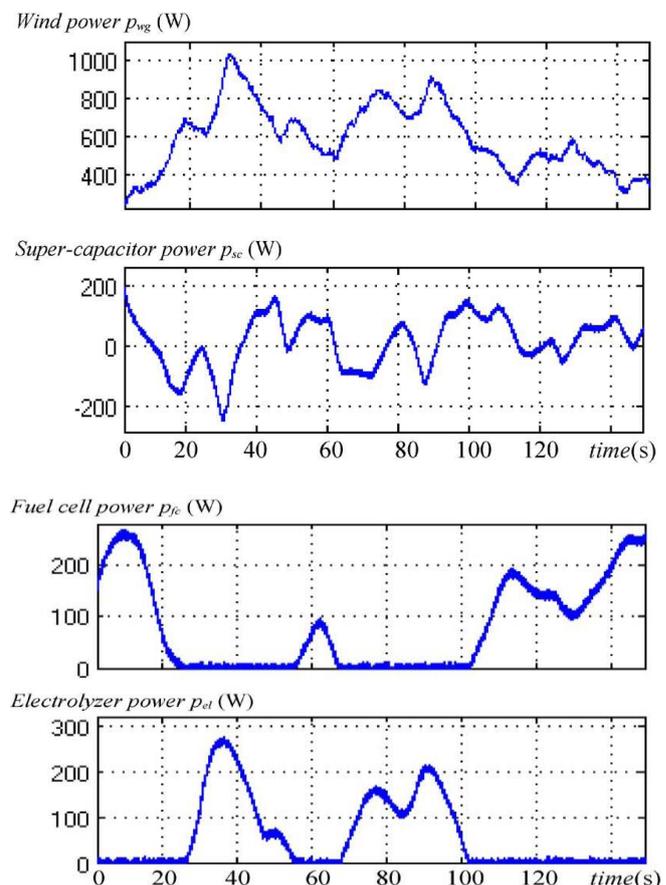


Fig. 11. Power profiles of the different sources.

**E. Comparison and Discussion**

With the help of energy storage systems, the dc-bus voltage and the grid powers can be well regulated with both power-balancing strategies, while the WG extracts the maximum available wind power.

By comparing the two power-balancing strategies with their experimental test results (Figs. 12 and 13), we see that the grid active power is better regulated in the “grid-following” strategy than in the “source-following” strategy. In the grid-following strategy, the grid power varies continuously because the line current control loop regulates the dc-bus voltage and the grid power is adjusted all the time. In the source-following strategy, the dc-bus voltage is regulated by the SCs, and the grid power can be directly used to supply the same power as required by the micro grid system operator. Thus, if the active generator is required to provide the necessary powers to participate in the micro grid management, the source-following strategy is preferred for more precisely controlling the grid powers.

## VI. CONCLUSION

In this paper, a dc-coupled HPS has been studied with the three kinds of energy sources: 1) a WG as a renewable energy generation system; 2) SCs as a fast-dynamic energy storage system; and 3) FCs with ELs and hydrogen tank as a long term energy storage system. The structure of the control system is divided into three levels: 1) SCU; 2) ACU; and 3) PCU. Two power-balancing strategies have been presented and compared for the PCU: the grid-following strategy and the source following strategy. For both of them, the dc-bus voltage and the grid power can be well regulated. The experimental tests have shown that the source-following strategy has better performance on the grid power regulation than the grid-following strategy.

## REFERENCES

1. W. Li, G. Joos, and J. Belanger, “Real-time simulation of a wind turbine generator coupled with a battery supercapacitor energy storage system,” *IEEE Trans. Ind. Electron.*, vol. 57, no. 4, pp. 1137–1145, Apr. 2010.
2. [Online]. Available: <http://www.eurobserv-er.org/>
3. G. Delille and B. Francois, “A review of some technical and economic features of energy storage technologies for distribution systems integration,” *Ecol. Eng. Environ. Prot.*, vol. 1, pp. 40–49, 2009.
4. C. Abbey and G. Joos, “Supercapacitor energy storage for wind energy applications,” *IEEE Trans. Ind. Electron.*, vol. 43, no. 3, pp. 769–776, May 2007.
5. G. Taljan, M. Fowler, C. Cañizares, and G. Verbić, “Hydrogen storage for mixed wind-nuclear power plants in the context of a Hydrogen Economy,” *Hydrogen Energy*, vol. 33, no. 17, pp. 4463–4475, Sep. 2008.
6. M. Little, M. Thomson, and D. Infield, “Electrical integration of renewable energy into stand-alone power supplies incorporating hydrogen storage,” *Hydrogen Energy*, vol. 32, no. 10, pp. 1582–1588, Jul. 2007.
7. T. Zhou, D. Lu, H. Fakham, and B. Francois, “Power flow control in different time scales for a wind/hydrogen/super-capacitors based activehybrid power system,” in *Proc. EPE-PEMC*, Poznan, Poland, Sep. 2008, pp. 2205–2210.