

Modelling of Butter worth low pass Stepped Impedance Microstrip line Filter

Pravesh, Navita

Abstract: This paper presents the design of a class of highly selective micro strip low pass filters. The proposed structure is considered for Stepped Impedance Low Pass Butterworth filter of order $n=3$ and $n=5$ with cut-off frequency 1.2 GHz and passband ripple of 3.01db [1]. The substrate FR4 having a dielectric constant 4.4 is considered for calculating the physical length of the micro strip low pass filter. The designing equation are solved using MATLAB Software and the results are analysed and compared using IE3D Simulator. The microwave filter is a building block that provides frequency selectivity in various microwave application like mobile, radar, satellite communication systems. The simulated results show the insertion loss and return loss of about -6.65 dB & - 55.49dB for $N=3$ and -7.23dB & -16.01 dB for $N=5$. Simulation has also been done for VSWR.

Keywords : Return loss, Substrate, Impedance Matching, MATLAB.

I. INTRODUCTION

A filter is defined as a two port system which passes certain range of frequencies and reject the others and on that basis we classify different filters. Microwave Filters operates in GHz range. This frequency range is the range used by most broadcast radio, television, wireless communication. Microstrip line is one of the classification of transmission line, can be modelled by making use of printed circuit board [PCB] method, and it is used to allow the particular microwave-frequency signal. Stepped Impedance Micro-strip line is a better candidate to model the filter due to its advantages of very small size, economically cheap, light in heaviness. Micro strip transmission line low pass filters show a vital role in numerous radio frequency wireless Communication Systems. In the paper modelling of 3rd order and 5th order Butterworth approximated stepped impedance Microstrip-line filter and the simulated results are compared on the basis of S-Parameter i.e. insertion loss and Return loss. For proposed design work, Butterworth Approximation is assumed which exhibits the monotonically decrease behavior in the passband and stopband. The designing equation are solved using MATLAB code and the results are simulated using ie3d software.

Revised Manuscript Received on January 15, 2020

* Correspondence Author

Pravesh, Department of Electronics and Communication Engineering, KIET Group of Institutions.

Navita, Research Scholar, Department of Electronics and Communication, I.F.T.M. University, Moradabad

II. MICROSTRIP FILTER DESIGN

Microstrip Geometry: The general structure of a microstrip is shown in Figure 1.1. A conducting-strip (microstrip line) having a width W and a thickness t is on the top of a dielectric material and relative dielectric material and height h , and the bottom of the substrate is a ground (conducting) plane [1][2].

The fields in the microstrip extend within two media—air above and dielectric below—so that the structure is inhomogeneous. The microstrip line does not hold on pure TEM wave because of its inhomogeneous nature. In Quasi-TEM Approximation the dominant mode then behaves like a TEM mode, and the TEM transmission line theory is applicable for the microstrip line as well. This is called the Quasi-TEM approximation and is valid almost all frequency ranges of microstrip line




Fig 1.1 Geometry of Microstrip line

III. DESIGN PROCEDURE FOR LOW PASS FILTER

First of all, considering the specifications required in the designing of microstrip low pass filter

Cut-off frequency $f_c = 1.2$ GHz

Source/load impedance $Z_0 = 50$ ohms

Normalized frequency $\Omega_c = 1$ GHz

Loss tangent $\tan \delta = 0.02$

Butterworth Low Pass Prototype Filters for Butterworth or maximally flat low pass prototype filters with an insertion loss $L_{Ar} = 3.01$ dB at the cut-off $\Omega_c = 1$, the element values may be computed by $g_0 = 1.0$

$$g_i = 2 \sin\left(\frac{(2i-1)\pi}{2n}\right) = 1 \text{ to } n$$

$$g_{n+1} = 1.0$$

For convenience, we have designed a Matlab code to calculate for generalized value of n as

```
clc
```

```
clear all
```

```
close all
```

```
%START OF PROGRAM
```

```
n=input('Enter order of filter: ');
```

Modelling of Butter worth low pass Stepped Impedance Microstrip line Filter

```
%getting values for all g parameters
g=zeros(1,n+2);
g(1)=1;
for i=1:n
    g(i+1)=2*sin((2*i-1)*pi/(2*n));
end
g(n+2)=1;
```

The normalized elements are then changed to L-C components for the given cut off frequency f_c and normally 50Ω source impedance is use for micro strip filter [4][5].

The general structure and LC ladder type stepped impedance low pass micro strip line filter is displayed in figure 1.2

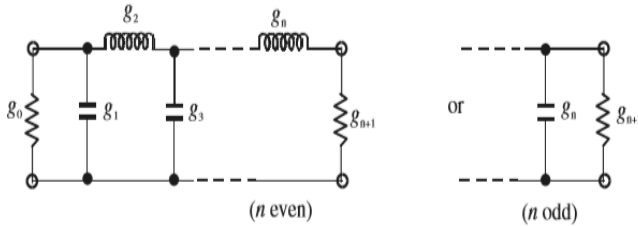


Fig 1.2: Ladder network structure for low pass prototype

Using Element Transformation for normalized cut-off frequency, we can have

$$L_1 = L_3 = \left(\frac{Z_0}{g_0}\right) \left(\frac{\Omega_c}{2\pi f_c}\right) g_1$$

$$C_2 = \left(\frac{g_0}{Z_0}\right) \left(\frac{\Omega_c}{2\pi f_c}\right) g_2$$

The fabrication of a filter is done on a substrate having relative dielectric constant of 4.4 and height of about 1.6mm. The characteristic impedance of high impedance line is chosen as $Z_{0L} = 93 \Omega$ and of low impedance line is chosen as $Z_{0C} = 17 \Omega$. Now we calculate the relevant design parameters of microstrip line by using the designing formulas [6][7]. First of all, calculating the microstrip line width and guided wavelength for the given impedance by using, [3].

$$\frac{W}{h} = \frac{8 \exp(A)}{\exp(2A) - 2}$$

where

$$A = \frac{Z_c}{60} \left\{ \frac{\epsilon_r + 1}{2} \right\}^{0.5} + \frac{\epsilon_r - 1}{\epsilon_r + 1} \left\{ 0.23 + \frac{0.11}{\epsilon_r} \right\}$$

Now calculating the effective dielectric constant by using following expression [3], since $W/h \geq 1$

$$\epsilon_{re} = \frac{\epsilon_r + 1}{2} + \frac{\epsilon_r - 1}{2} \left(1 + 12 \frac{h}{W} \right)^{-0.5}$$

Guided wavelength is calculated at the cut-off frequency $f_c = 2.2$ GHz as follows,

$$\lambda_{g0} = \frac{300}{f(\text{GHz}) \sqrt{\epsilon_{re}}} \text{ mm}$$

As $W/h \leq 1$, we use

$$\epsilon_{re} = \frac{\epsilon_r + 1}{2} + \frac{\epsilon_r - 1}{2} \left\{ \left(1 + 12 \frac{h}{W} \right)^{-0.5} + 0.04 \left(1 - \frac{W}{h} \right)^2 \right\}$$

$$\epsilon_{re} = \frac{4.4 + 1}{2} + \frac{4.4 - 1}{2} \left\{ \left(1 + 12 \frac{1.2}{0.4} \right)^{-0.5} + 0.04 \left(1 - \frac{0.4}{1.2} \right)^2 \right\}$$

Also, the calculation of physical length for high impedance and low impedance line is done by using following expression.

Physical length of the high impedance line is calculated by using,

$$l_L = \frac{\lambda_{gL}}{2\pi} \sin^{-1} \left(\frac{\omega_c L}{Z_{0L}} \right)$$

low impedance line physical length is calculated as,

$$l_C = \frac{\lambda_{gC}}{2\pi} \sin^{-1} (\omega_c C Z_{0C})$$

The modified length of high impedance line and low impedance line is calculated by using following expressions. We have to select their length in such a way that the following expressions must be satisfied.

$$\omega_c L = Z_{0L} \sin \left(\frac{2\pi l_L}{\lambda_{gL}} \right) + Z_{0C} \tan \left(\frac{\pi l_C}{\lambda_{gC}} \right)$$

$$\omega_c C = \frac{1}{Z_{0C}} \sin \left(\frac{2\pi l_C}{\lambda_{gC}} \right) + 2 \times \frac{1}{Z_{0L}} \tan \left(\frac{\pi l_L}{\lambda_{gL}} \right)$$

In Matlab:

```
%n=3 butterworth.
clc
clear all
close all

zo1=input('zo1');
zo2=input('zo2');
zo3=input('zo3');
ER=input('ER');
H=input('H');
fc=input('fc');
L=7.96*10^(-9);
C=6.36*10^(-12);
%IF w/h is less than 2
A1=(zo1/60)*((ER+1)/2)^0.5+((ER-1)/(ER+1))*(0.23+(.11/ER));
WBYH1=((8*exp(A1))/(exp(2*A1)-2));
W1=WBYH1*H
ERE1=((ER+1)/2)+((ER-1)/2)*((1+12*(H/W1))^(-0.5) + 0.04*(1-(W1/H))^2);
LAMBDA1=(300)/(ERE1)^0.5
L1=(LAMBDA1/(2*3.14))*asin((2*3.14*fc*L)/zo2);
Lc=(LAMBDA1/(2*3.14))*asin((2*3.14*fc*C)/zo3);

%for adjustment

Llnew=((LAMBDA1)/(2*3.14))*asin((1/zo2)*((2*3.14*fc*L)-zo3*tan((3.14*Lc)/(LAMBDA1))))
Lcnew=((LAMBDA1)/(2*3.14))*asin(zo3*((2*3.14*fc*C)-(2/zo2)*tan((3.14*L1)/(LAMBDA1))))
```

IV. CALCULATED RESULTS AND LAYOUT

N=3

s.no	Source Impedance/low Impedance/High Impedance	Guided Wavelength	Width	Physical Length
01	50(source)	163.01 mm	3.05mm	6mm

02	93(high)	171.30 mm	.865mm	10.67mm
03	17(low)	98.17mm	15.97mm	7.87mm

N=5

s.no	Source Impedance/low Impedance /High Impedance	Guided Wavelength	Width	Physical Length
01	50(source)	163.01 mm	3.05mm	6mm
02	93(high)	17.30 mm	.865mm	6.27(l1 and l5) and 29.53mm(l3)
03	15(low)	83.61mm	15.97mm	6.36mm(c2 and c4)

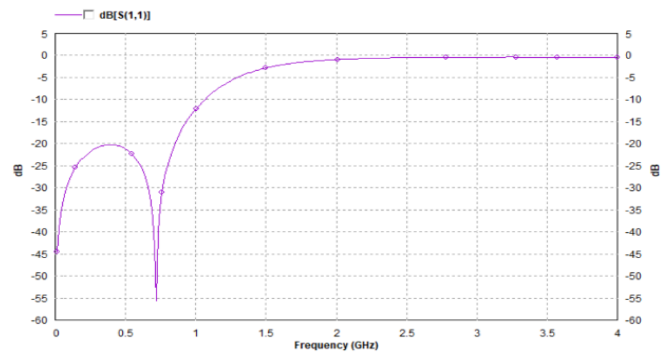


Fig 1.5: S(1,1)-Return Loss

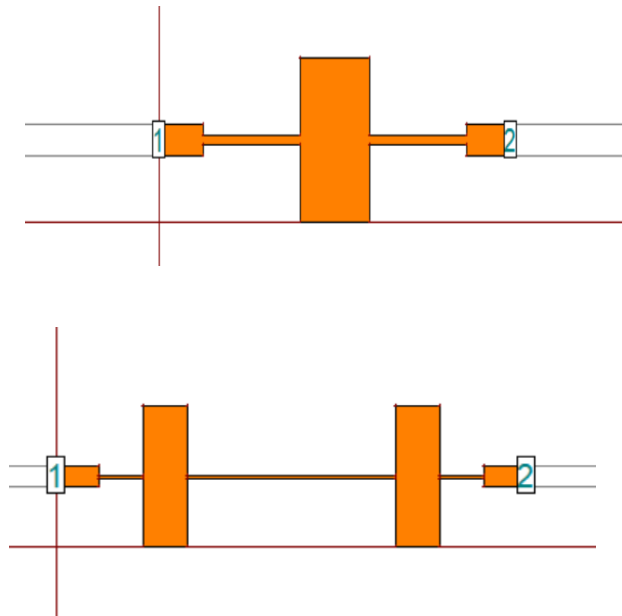


Fig 1.3 Microstrip line filter layout for N=3 and N=5

V. SIMULATED RESULTS

N=3

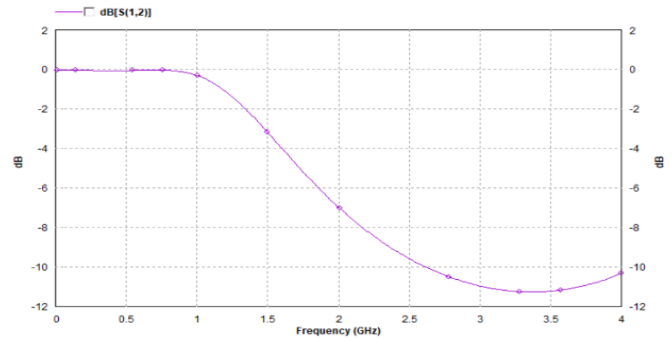


Fig 1.6: S(2,1)-Insertion loss

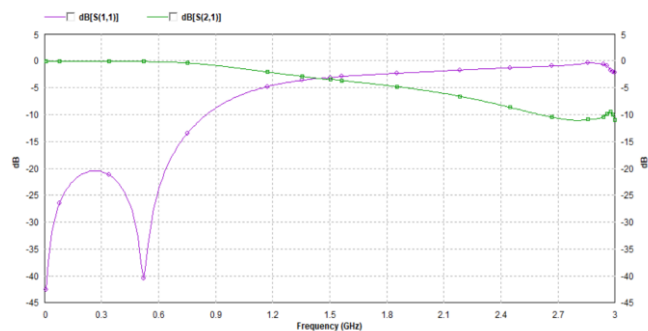


Fig 1.4: S(1,1)-Return Loss and S(2,1)-Insertion loss Parameters

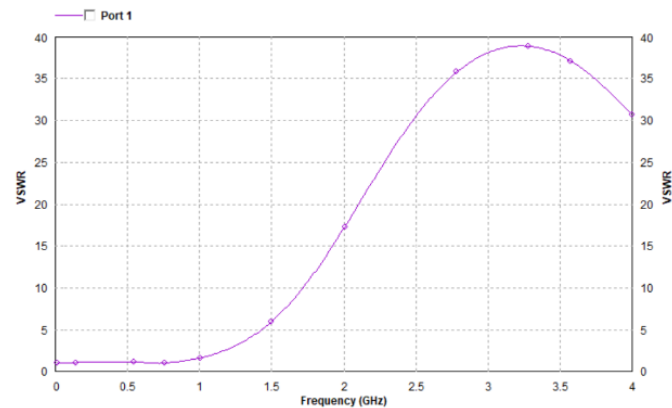


Fig 1.7: VSWR-input port

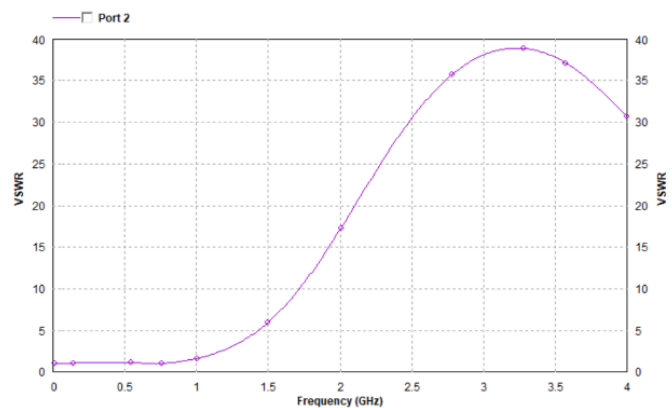


Fig 1.8: VSWR-output port

Modelling of Butter worth low pass Stepped Impedance Microstrip line Filter

N=5

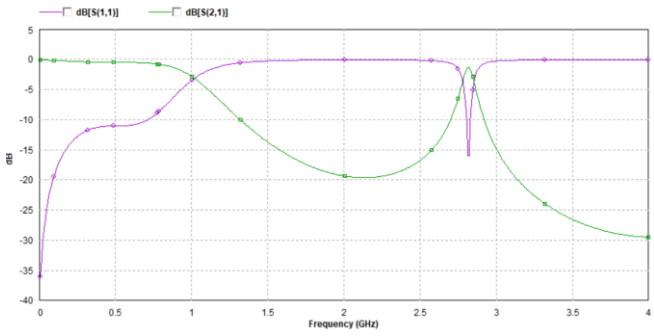


Fig 1.9: S(1,1)-Return Loss and S(2,1)-Insertion loss Parameters

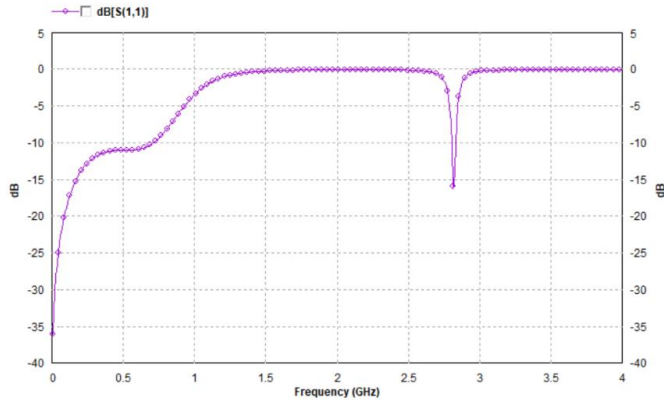


Fig 1.10: S(1,1)-Return Loss

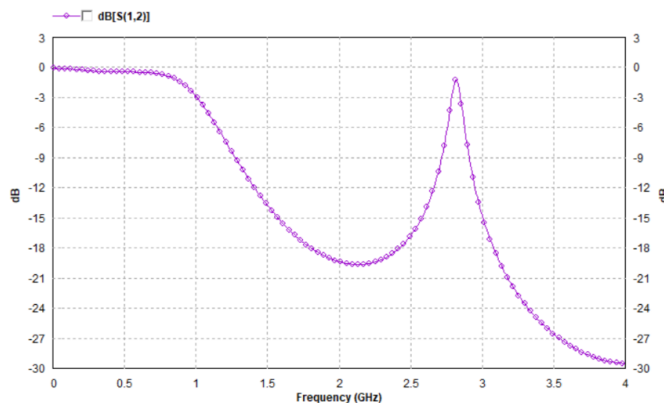


Fig 1.11: S(2,1)-Insertion loss Parameters

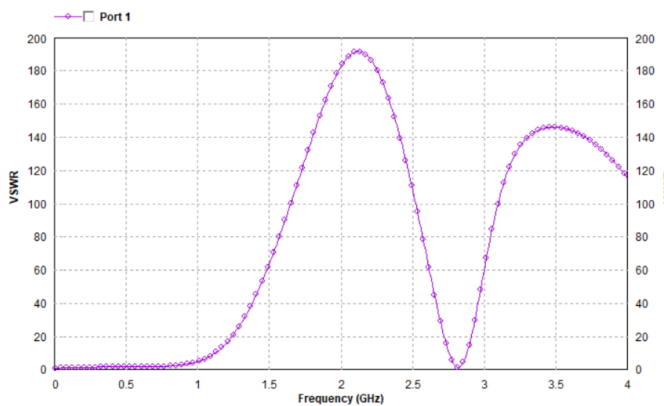


Fig 1.12: VSWR-output port

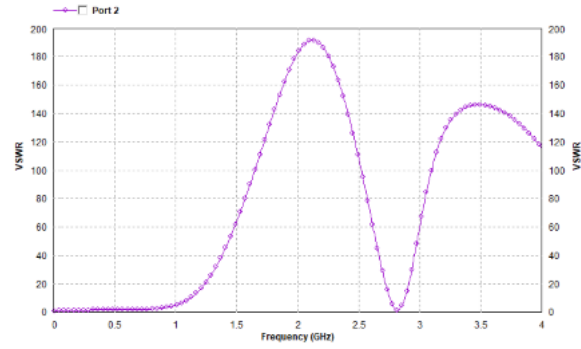


Fig 1.13: VSWR-output port

VI CONCLUSION AND DISCUSSION

In this paper, Modelling of Stepped Impedance low pass Butterworth filter for the order N=3 and N=5 having 1.2 GHz Cut-off frequency has been proposed and the simulated values of Insertion Loss and Return Loss for N=3 is -6.65 dB & -55.49dB and for N=5 is -7.23dB & -16.01 dB respectively. Various simulated results for VSWR has also been shown. Simulation of proposed filter has been done using IE3D Mentor Graphics. Designing equation are solved using MATLAB software. The results also show that by increasing the order of the filter Return Loss and Insertion Loss reflecting the changes.

REFERENCES

1. Jia-Shen G. Hong & M.J. Lancaster, "Microstrip Filters for RF/Microwave Applications" John Wiley & Sons Inc., 2001.
2. D. M. Pozar, "Microwave Engineering," John Wiley & Sons Inc. , 2010.
3. G.L. Mathaei, L. Young & ENT. Jones, "Microwave Filter impedance matching networks and coupling structures," Artech House, Dedham, Mass, 1980
4. Sudipta Das, Dr. S.K. Chowdhury, "Design Simulation and Fabrication Of Stepped Impedance. Microstrip line Low pass Filter for S-band Application using IE3D and MATLAB" IJECT vol. 3, Issue 1, Jan. - March 2012
5. IE3D Software Developed by WS Zealand Software
6. Tentzeris M. , Laskar J., Sutono A., Lee C.-H., Davis M.F., Obatoyinbo A. , and Lim K. , "Development of Integrated 3D Microwave-Millimeter Wave Radio Front-End System- on-Package (SOP)", European GaAs Conference, vol.3, pp. System-on-package (SOP)", European GaAs Conference, V01.3, pp.

AUTHORS PROFILE



Dr. Pravesh is working as an Associate Professor in the department of Electronics and Communication, KIET Group of Institutions Ghaziabad. She has completed her M.Tech. from U.P.T.U Lucknow in 2010. She has more than 15 years of teaching experience. During her tenure She has published various research paper in reputed Journal and guided many M. Tech and B. Tech students. She has completed her PhD from Banasthali Vidyapith Rajasthan. Her area of Specialization is Microelectronics and Thin film materials for Photovoltaic Application .



Mrs. Navita Singh is a Research Scholar in the department of Electronics and Communication, I.F.T.M. University, Moradabad. She has completed her M.Tech. from U.P.T.U, Lucknow in 2011. She has more than 9 years of teaching experience. Her Area of Specialization is Microwave Filters. Her Research Project includes Some Studies on Tunable Microstripline Filter Based on Metamaterial using HFSS and IE3D simulation. She has published more than various research articles in International Journal and Conferences. She has guided many B. Tech and M. Tech students.