

# Characteristics and Performance of Microstrip Patch antenna for C Band and X Band



Sarabjeet Kaur, Bharti Chaurasia

**Abstract-** This article present a compact proposed patch antenna for impedance matched for simple two horizontal slot is placed in a active patch with a via hole in sandwiched between radiated patch and bottom plane of an microstrip patch antenna for a band of 4 to 12Ghz application. The planned antenna is synthesized by using glass reinforced epoxy laminated material (FR4) and electromagnetic 3D view (IE3D) software. The software based design is suitable for a band of 3.3/5.5 Wi-Max and 5.3/5.8 WLAN frequency band. It is also suitable for satellite application The ground and exciting patch is separated by 1.5mm thickness. The proposed antenna parameter is design for 10Ghz..For such design the achieved Bandwidth for an antenna is 53 % at a VSWR<2, acceptable return loss (S11) = - 22.5dB, and the directivity of an antenna is 6 dBi. The antenna is appropriate for an application of X band. The designs of an antenna and its result have been discussed in detail.

**Keywords**—FR4, slotting technique, Via hole, compact antenna, MOM Software.

## I. INTRODUCTION

For copper printed patch antenna is used in different wireless communication in concert, easy to carry in a mobility requirement and ultra wide band application. The first microstrip patch antenna is introduced in early seventies and researcher has been involved to improving their inherently narrow bandwidth.[1]. The patch antenna is one of the best solutions for tiny size, low profile and operated in multiband band antenna for current scenario is large. The printed antenna is one of the way for designing novel compact size antenna. conducting layer impressed on substrate. The antenna for an X band is investigated by using ESPAR(electronically steerable parasitic array radiator) technique to improve the gain as well as bandwidth. The bandwidth is less but gain has to be improve for X band application and WLAN communications [2] For reconfiguration the author used a two probes one for feeding and second for reconfiguration between ground and exciting patch and inverted U shape to enhance the bandwidth [1]. Some other technique which is used in a wireless communication is by using a reconfiguration of exciting patch and shorting pin between the ground and exciting patch of an antenna.

The author described about the two transverse <sup>TM</sup> modes that is TM<sub>10</sub> and TM<sub>20</sub>. By using a shorting pins in a proposed antenna one additional mode TM<sub>11</sub> is obtained. [1-2][13]

The triangle and Inverted U shape slit, H shape slit is printed on a conducting layer of an antenna for a matching to reduces losses and improved bandwidth of an antenna.

The multi band is achieved by the author in use frequency band resulted in a UWB parameter. [1-3] [11-13]. Antenna is also appropriate for covered base station antennas for 5 to 6 GHz communication [3]. Slotting technique use for bandwidth enhancement for means of pervasive communications [5]–[6]. The wideband of an antennas is investigated that can be applicable in a selected frequency from of other parameter, like climate changing. For X band communications. Some other antennas is work on a parasitic element to improve gain as well as bandwidth but the bandwidth is not upto the mark[2-3] Recently wireless communication access in mobility environments are worked to the wireless standard IEEE 802.11p. A number of patch antennas are operated at L and C and X band operation [8]–[10][13].The approach is used for proposed design is used simple to horizontal slot in a exciting patch to improve bandwidth and drop in dimension for 4 to 12 GHz band function. The planned antenna is work on 6.9 GHz to 12GHZ. By simple alteration the slot length of a design the author can varied the different parameter of an structure design. Such structure design of an antenna bandwidth is 14.20% [2]-[3] similarly by changing, parasitic element or stacking the position and length of the slit or parasitic element investigator operated in different band [6]. The parasitic element used at a distance of a 0.5λ of an exciting patch the investigate to come close to a bandwidth of 52.8% [7]

## II. ANTENNA ANALYSIS

Antenna Dimension:

The proposed structure is demonstrate to an antenna with a frequency of 10 GHz, here we used the FR4 substrate with ε<sub>r</sub>=4.3, and height of the substrate (t) = 1.5mm, tangent loss (tanδ)=0.02. By used of expression, from 1 to 6. We find out the width and length of the reflector and radiating patch of the proposed design.[9]

$$We = \frac{0.5c}{f\sqrt{(\epsilon + 1)/2}} \tag{1}$$

$$\epsilon_e = 0.5\left(\frac{\epsilon_r + 1}{2}\right) + 0.5\left(\frac{\epsilon_r - 1}{2}\right)\left[1 + 12\frac{h}{We}\right]^{-1/2} \tag{2}$$

Manuscript received on February 10, 2020.

Revised Manuscript received on February 20, 2020.

Manuscript published on March 30, 2020.

**Sarabjeet Kaur**, PhD Scholar, Department of Electronics & Communication, SRK University Bhopal, Madhya Pradesh, India.

E-mail: [sarabjeetkk123@gmail.com](mailto:sarabjeetkk123@gmail.com)

**Dr. Bharti Chaurasia**, Associate Professor, Department of Electronics & Communication, SRK University Bhopal, Madhya Pradesh, India.

E-mail: [bharti.chourasia27@gmail.com](mailto:bharti.chourasia27@gmail.com)

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>)

## Characteristics and Performance of Microstrip Patch antenna for C Band and X Band

$$Leff = 0.412h \frac{(\epsilon_r + 0.3) \left(\frac{We}{h} + 0.264\right)}{(\epsilon_r + 0.258) \left(\frac{We}{h} + 0.8\right)}$$

(3)

$$Le = \frac{0.5c}{f_0 \sqrt{\epsilon_{re}}} - 2Leff \quad (4)$$

$$L_g = Le + 6h \quad (5)$$

$$W_g = We + 6h \quad (6)$$

where:

- $f_0$  = frequency
- $\epsilon_r$  = Permittivity of the substrate
- $\epsilon_e$  = Effective permittivity of the Substrat
- $We$  = Patch width
- $Le$  = Patch length
- $t$  = height of the dielectric
- $L_0$  = ground plane
- $W_0$  = ground plane

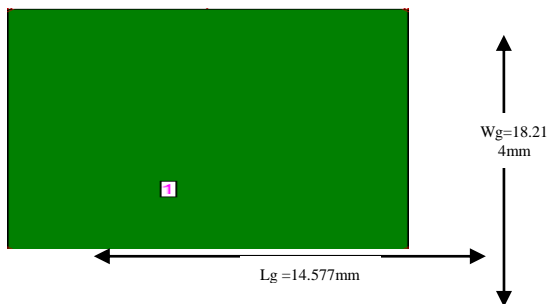


Figure.1(a) Radiator plane Dimension.

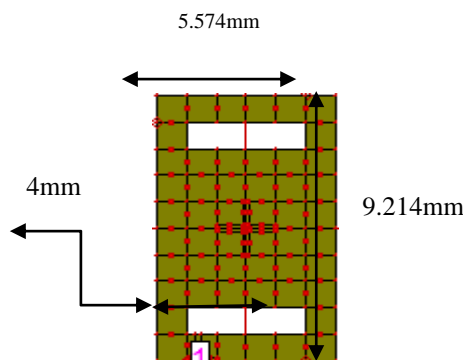


Figure.1 (b) Exciting patch with two horizontal slit.

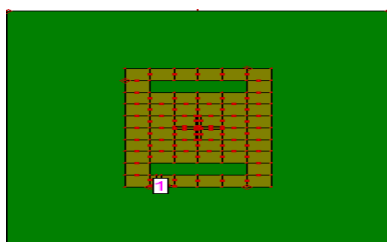


Figure.1(c) Top view of proposed antenna .

As shown in figure 1 (a) and (b) the Structure of ground plane and horizontal slit radiation plane antenna. The top view of an antenna consists of a loaded two horizontal slit extended up to 4mm in the radiating patch and the via hole is associated in between radiating patch and reflection plane is as shown in figure1 (c). From the earlier the rectangular, triangular or inverted U slot is introduce for a improved bandwidth enrichment as compares to further respect [1-3]. Our work we worked on improve the bandwidth of proposed structure attach a via hole or short the reflector and radiated patch.


Table Number-1:- Specification of the Structured antenna

S. N.	Assign parameter as per proposed design	Values for proposed Structure
1	frequency( $f_0$ )	10GHz
2	Substrate permittivity( $\epsilon_r$ )	4.3
3	Height of substrate(h)	1.54 mm
4	Loss tangent for Proposed substrate	0.02
5	Patch Width( $We$ )	9.21442mm
6	Patch Length ( $Le$ )	5.5 mm
7	Width of Reflection plane ( $Wg$ )	18.2 mm
8	Length of Reflection pane( $Lg$ )	14.5774mm
9	Feed location:	-1.50662 mm 4.6072mm
10	Shorting pin radius xf, yf	0.15mm

### III. RESULT AND PARAMETERS STUDY


#### A. Designed and Study.

The Structured and principle of wide band proposed design is in a Flame Retardant 4 material for  $18 \times 14 \times 1.5 \text{ mm}^3$  is studied. The parameter of a proposed antenna such as directivity, gain, bandwidth etc. has to be obtained by using the electromagnetic software. The Software based result are calculated the different component of a patch from given equation [9] From the equation the length and width of the proposed antenna are as shown in at Table No.1. The proposed antenna is appropriate for satellite communication, 4 to 12GHz band. The proposed structure consists of a two horizontal slit at the radiating patch to improving the band width and directivity of geometry. The design is very trouble-free and dense in size.

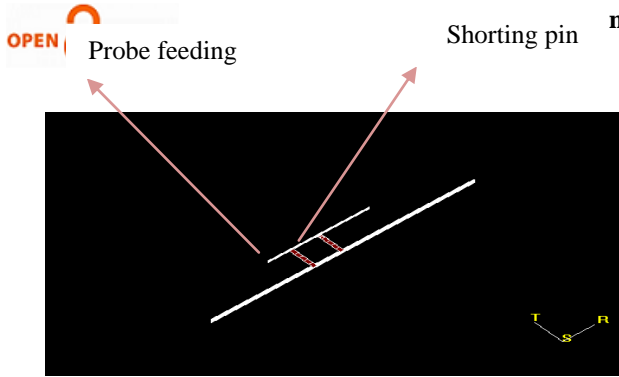


**Figure 2. Three Dimensional view proposed antenna**

Fig 2 publicized the 3 Dimensional view of a proposed antenna. The top is an radiated patch and the bottom plane is an reflection plane and it is linking coaxial feeding is given

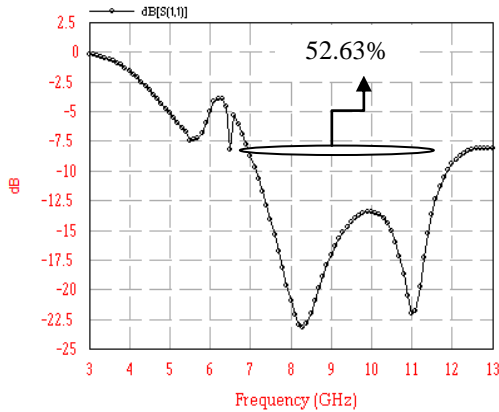


**Fig.3 S11 curve (Return Loss) of an antenna among two horizontal slit and shorting pin**

For a design structure have a single band from 7GHz to 12 GHz The Return Loss for indentation is effective between this two is 8.2 to 11GHz.

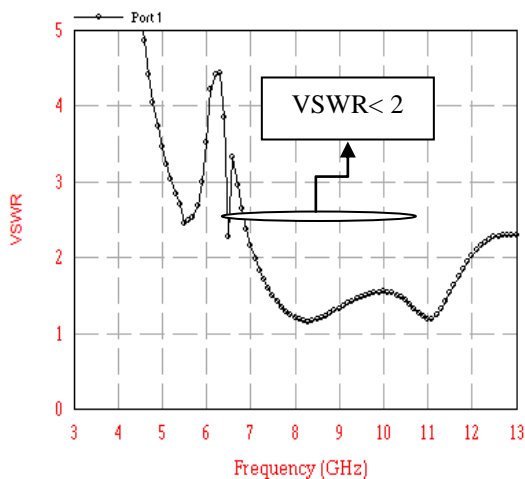

**Figure.4 Simulated VSWR of proposed design.**


The simulated and measured valued of VSWR is shown in figure 3. In this the impedance in terms of along the length and width feed and size of horizontal slit is proposed to match an real and imaginary part with  $50 \Omega$  to maximum radiation in a free space. The VSWR is effective in between 7 GHz to 12 GHz.

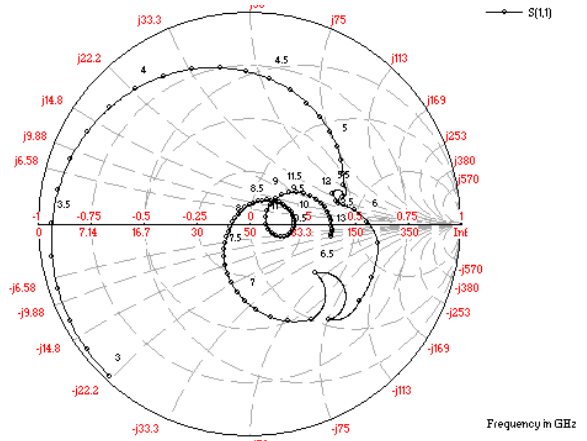

**Figure.5 Smith chart of an antenna**

As shown in figure 5. To find out the reactive and real part of the proposed antenna.


**Directivity Vs. Frequency**

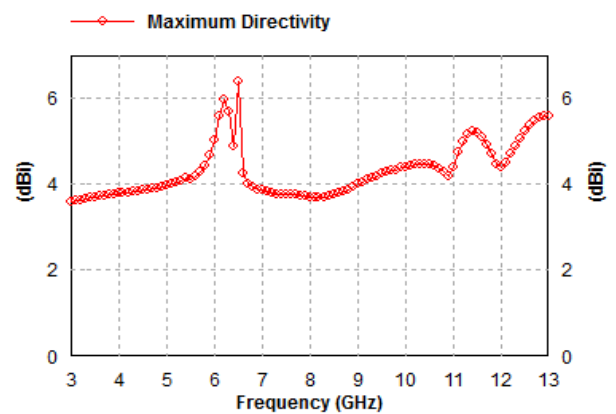

**Fig.6 Simulated directivity of proposed structure**

The Directivity of a proposed structure varied with frequency for a satisfactory band is shown in figure 6. The peak directivity of the proposed structure is 6.3 dBi.


**Axial-Ratio Vs. Frequency**

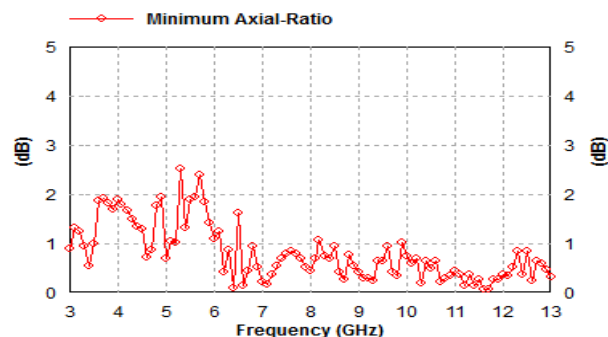

**Figure.7 Simulated Axial Ratio with respect to frequency**


The Figure 7 shows the simulated axial ratio of the Structure. The Figure represent the polarization of an antenna. As per curve the magnitude is below 3 dB for a satisfactory band so that is the antenna work as a circular polarization

# Characteristics and Performance of Microstrip Patch antenna for C Band and X Band

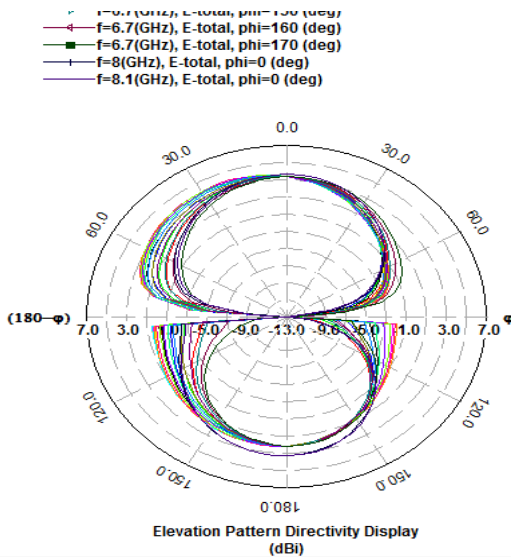

**Fig.8 Field Pattern of a proposed structure for 7 to 12 GHz.**

The filed pattern of Total E (Electric field with respect to azimuth and elevation ) is shown in figure 8.

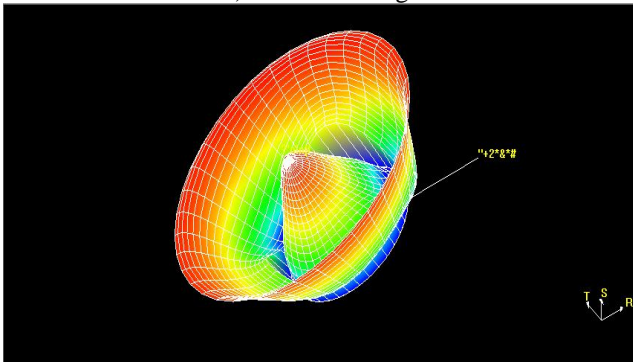

**Figure 9. 3Dimensional radiation View of a proposed structure**

The Simulated 3 dimensional view of radiation field shown in colored pattern is as showed in figure 9. It represented the radiation in the free space.

## IV. CONCLUSION

In this article a simple horizontal slit structure is Investigated. The simulated radiation pattern and is a good agreement with respect to all parameter is accepted in term of C and X band application. By tuning a slit configuration, we varied the size and bandwidth of an antenna. By such technique we achieve good performance at the demonstrated frequency. By introducing shorting via hole in between the layers, we can have better return loss and hence bandwidth. Measured results are far better the simulated results 7 GHz to 12GHz. Comparison graph shows difference between simulated result, caused by the variation of slot in a exciting patch antenna we can tuned the different band for different application.

## REFERENCES

1. Sai Radavarana and Maria Pour," Wideband Radiation Reconfiguration Microstrip patch antenna loaded with two inverted U-slot",*IEEE Transaction on Antenna and Propagation* , Vol 67 no 3 pp 1501 - 1508 March 2019
2. Reza Movahedinia ,Abdel Razik, Mohmmad Reza Chahamir, "X-Band circular polarizes Electronically steerable parasitics array

radiator of DRA,"*IEEE Transaction on Antenna and Propagation*,vol.66No.2 February 2018

3. Syed Muzahir abbas, Yogesh Ranga, Anand K.Verma and Karu P.Esselle," RA Simple Ultra Wideband Printed Monopole Antenna With High Band Rejection and Wide Radiation Patterns"*IEEE Transactions On Antennas And Propagation*, Vol. 62, No. 9, September 2014
4. Hang wong, Kwok Kan and Xia Gao,"Bandwidth Enhancement of a monopolar patch antenna V-Shape slot for car-to-car and WLAN communication", *IEEE Transaction on Vehicular technology* vol.18 pp 1-7,2015.
5. U.Chakraborty, A.Kundu,S.K.chowdhury and A.K.Bhattacharjee "Compact Dual Band Microstrip Antenna for IEEE 802.11a WLAN application"*IEEE Antenna and Wireless Propagation Letter*, vol.13, no. 1, pp. 407- 411, 2014.
6. D.Sugumar, Shalet Sydney,Dhanaraju Athina, T.Joyce Selvahephzibath," Bandwidth Enhancement of coaxial feed U slotted microstrip antenna modeled with FDTD algorithm", *IEEE International conference on computational intelligence and computing research*, Vol. 12, 2010.
7. Puran Gour and Ravishankar Mishra,"Bandwidth Enhancement of a Backfire Microstrip PatchAntenna for Pervasive Communication" *International Journal of Antennas and Propagation*,Volume 2014, Article ID 560185, 7 pages <http://dx.doi.org/10.1155/2014/560185>
8. Amer Bzeigh, Soubhi Abou Chahine, Karim Y.Kabalan, Ali El Hajj, Ali Chehab,"Empirical Formula and Design of a broadband enhancement E patch antenna", *24th National Radio Confrence (NRSC 2007) vol. 11, 2007.*
9. C. A. Balanis, *Antenna Theory, JohnWiley & Sons, 3rd edition,2005.*
10. M. Schack, D. Kornek, E. Slotke, and T. Kürner, "Analysis of channel parameters for different antenna configurations in vehicular environments," *IEEE Vehicular Technology Conf. Fall*, pp. 1-5, Sep. 2010.
11. L. Reichardt, J. Pontes, G. Jereczek, and T. Zwick, "Capacity maximizing MIMO antenna design for car-to-car communication," *IEEE Int. Workshop on Antenna Tech.*, pp. 243-246, Mar. 2011.
12. M. Westrick, M. Almalkawi, V. Devabhaktuni, and C. Bunting, "A low-profile, low-cost antenna system with improved gain for DSRC vehicle-to-vehicle communications," *Int. Journal of RF and Microw Computer-Aided Engineering*, vol. 23, no. 1, pp. 111-117, Jan. 2013.
13. W. X. An, H. Wong, K. L. Lau, S. F. Li, and Q. Xue, "Design of broadband dual-band dipole for base station antenna," *IEEE Trans. Antennas and Propagat.*, vol. 60, no. 3, pp. 1592- 1595, Mar. 2012
14. J. S. Row and Y. Y. Liou, "Broadband short-circuited triangular patch antenna," *IEEE Trans. Antennas and Propagat.*, vol. 54, no. 7, pp. 2137-2141, Jul. 2006.
15. M. Rostamzadeh, S. Mohamadi, J. Nourinia, C. Ghobadi, and M. Ojaroudi, "Square monopole antenna for UWB applications with novel rod-shaped parasitic structures and novel V- shaped slots in the ground plane," *IEEE Antennas and Wireless Propagat. Lett.*, vol. 11, pp. 446-449, 2012.
16. P. F. Wu, J. M. Pei, and G. J. Liang, "A novel super thin planar car antenna," *IEEE Int. Conf. on Microw. and Millimeter Wave Tech.*, pp. 377-379, May 2010.