

A Circular Cache Layer Based Caching Algorithm in Wireless Sensor Network

Gurjeet Singh, O. P Gupta, B.K. Sawhney, Salam Din

Abstract— This technique proposes Circular Cache Layer Based (CCLA) Algorithm to divide the load of query from single cluster head. All sensor nodes are commonly resource constrained and have limited amount of energy. In wireless sensor networks, BS (Base Station) is generally set away from the target area like base research. In base research single CH transmits data directly to BS. Single CH(cluster head) there is heavy load on CH because CH broadcast query to all nodes in cluster, receive data from nodes ,aggregate data, amplify signal and transmit to base station. So sensor nodes become dead after working as CH but in proposed technique there are two cluster heads CH1 and CH2. CHs are not stationary means CHs changes within cluster according to available battery. CH2 is responsible for collecting data from sensor nodes, store this data and transmit to CH1 when required. CH2 contain data time bounded interval according to TTL (time to live) process CH1 transmit information to BS. This technique provides load balancing. In this research calculate average energy of CHs and number of time rounds in which sensor nodes become dead. Simulation results comparing with previous protocol prove that our new algorithm is able to extend the network lifetime observably.

Index Terms—About four key words or phrases in alphabetical order, separated by commas.

I. INTRODUCTION

WSNs (Wireless sensor networks) consist of large numbers of distributed nodes that are generally randomly deployed in region of interest. In typical, each node is equipped with one or more sensors, embedded processors, low-power radios, memory, power supply and sometimes mobility module, location module and actuator as well. While these nodes are tightly constrained in terms of battery power and random deployment in target areas; make it almost impossible to recharge/replace the dead battery. In order to prolong the network lifetime, energy efficiency protocols should be designed for the WSNs. Efficiently organizing sensor nodes into clusters is useful in reducing energy consumption. Many energy-efficient routing protocols are designed based on the clustering structure, e.g. LEACH (Low-Energy Adaptive Clustering Hierarchy), ENCM (Expected Number of Cluster Members clustering algorithm), and EECS (Energy Efficient Clustering Scheme).

Energy efficiency is the main concern in WSNs, but also it should be gained with balanced distribution in whole network space. Balanced distribution of energy in whole network will

lead to balanced death of nodes in all regions preventing from lacking network coverage in a rather large part of the network. Especially for homogeneous sensor networks, balance strategy plays an important role to maximize the network lifetime.

To narrow difference and prolong the networks lifetime, we propose a CCLB (Circular Cache Layer Based) clustering algorithm which is closely related to ENCM in Wireless Sensor Networks according to the CH election phase. Our difference is mainly in the cluster formation phase, in Intra Cluster communication heads and CCLB has two cluster heads.

A. CIRCULAR CACHE LAYER BASED CACHING ALGORITHM IN WIRELESS SENSOR NETWORK

In this paper, our motivation is to find an appropriate degree of balancing the load of every CH and prolongs network lifetime. Some previous algorithm discussed on this matter like LEACH, EECS and ENCM.

A. AVERAGE ENERGY CONSUMPTION

It is necessary to acquire the average value of energy consumption by a single CH before the algorithm statement. To estimate the mean energy consumption we use an energy consuming equation

Equation of Energy consumption for receiving message

$$E_{Tx}(l, d) = [lE_{elec} + lE_{fs}d^2]$$

Equation of Energy consumption for receiving message

$$E_{Rx}(l) = E_{Rx_elec}(l) = lE_{elec}$$

Where E_{Tx} and E_{Rx} denote the transmitter and receiver circuit energy consumption per.

This Equation for calculating energy dissipated in CH during single frame

$$E_{CH} = lE_{elec} \left(\frac{N}{i} - 1 \right) + lE_{DA} \frac{N}{i} + l\epsilon_{amp}d_{toBS}^4$$

l =number of bits in message, d_{toBS} distance to base station and E is energy.

B.ALGORITHM. : This research proposes a protocol is more like ENCM. Simulation parameters, number of sensor, location of base station are same as in ENCM. Our difference is in the cluster formation phase and election of cluster heads. There is two cluster heads CH1 and CH2 in each cluster. CH2 is responsible for collecting data from sensor nodes, store this data and transmit to CH1 when required. CH2 contain data time bounded interval according to TTL (time to live) process. CH1 transmit information to BS. This technique provides load balancing.

C.ELECTION OF HEAD1 In every cluster single sensor node is selected as cluster head1. Cluster head1 is sensor node which can communicates with base station means that this node is responsible for transferring information to and from base station. In this proposed algorithm developed for selecting single sensor node as a cluster head1..

Revised Manuscript Received on 30 July 2013.

* Correspondence Author

Gurjeet Singh, Student M.Tech (CSE), School of Electrical Engineering & Information Technology, PAU, Ludhiana, Punjab, India

Dr. O. P. Gupta, Associate Professor, School of Electrical Engineering & Information Technology, PAU, Ludhiana, Punjab, India

Dr. (Mrs.) B.K. Sawhney, Associate Professor, School of Electrical Engineering & Information Technology, PAU, Ludhiana, Punjab, India

Er. Salam Din, Assistant Professor, School of Electrical Engineering & Information Technology, PAU, Ludhiana, Punjab, India.

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an open access article under the CC-BY-NC-ND license <http://creativecommons.org/licenses/by-nc-nd/4.0/>.

Different nodes are selected as a cluster head1 which sensor node has maximum battery power and minimum distance from base station Battery power is fixed for every sensor node because all sensor nodes are homogenous,

$$CH_1 = \left(\max_{j=1}^{i=N} b_{(i,j)} * W_1 + \min_{j=1}^{i=N} d_{(i,j)} * W_2 \right)$$

W₁ variable having value .8 and W₂ variable having value .2 Equation for finding distance between cluster node and cluster head

$$d = \sqrt{(BS_{ix} - CH_{ix})^2 + (BS_{iy} - CH_{iy})^2}$$

I=number of Cluster, N=number

D. ELECTION OF HEAD2 In every cluster single sensor node is selected as cluster head2. Which sensor node within same cluster is at minimum distance from cluster head1 is elected as a cluster head2.

Equation for electing cluster head1

$$CH_2(i) = \text{Min}(d)$$

Equation for finding distance between cluster node and cluster head of nodes per cluster.

$$d = \sqrt{(CN_{ix} - CH_{ix})^2 + (CN_{iy} - CH_{iy})^2}$$

II. SIMULATION AND RESULTS

Simulation setup
Table 1

Parameter	Value
Area of Network	100m*100m
Number of Nodes	400
Position of BS	(50,200)
E _{tx}	50 mj/bit
E _{rx}	50 mj/bit
packet size	2000 bit
Initial energy	0.5 j
E _{amp}	100 mj/bit/m2
Mt	2

Where E_{Tx} and E_{Rx} denote the transmitter and receiver circuit energy consumption per bit. E_{amp} accounts for the effect of amplifier, antenna and carrier frequency with a prescribed bit error rate (BER). And Mt further accounts for the number of transmitting antenna based on E_{amp}.

III. RESULTS

The proposed algorithm is evaluated under different scenarios to check their efficiency in the WSN. The various factors that influence the design of WSN are evaluated and analyzed to study their impact on the desired results. This chapter includes the performance evaluation parameters, various factors that affect performance and the obtained results in detail. Figure presents the number of nodes alive when using clustering protocols. This result is closely related with the network lifetime of the wireless sensor networks. In the case of network adopting LEACH (with 5% of the nodes being cluster heads), the first event where a node runs out of energy occurs after 612 rounds, whereas in the case of ENCM it occurs after 932 rounds. But in our proposed algorithm CCLB (Circular Cache Layer Based) first sensor nodes dead at 1650 (approx.) rounds. So result is far better than previous algorithms LEACH and ENCM.

Diagrams in the form of graph shows number of alive

nodes decreases with time. x-axis presents alive nodes and y-axis presents time rounds. In this diagram result of new algorithm is compared with previous algorithms. LEACH shown by green colour, ENCM shown by red colour and new algorithm CCLB (Circular Cache Layer Based) shown by blue colour.

Results in figure 1 show that CCLB(Circular Cache Layer Based) can be well close to the appropriate degree of balancing the load of every CH and prolongs network lifetime by large difference against LEACH (Low-Energy Adaptive Clustering Hierarchy) and ENCM (Expected Number of Cluster Members clustering).

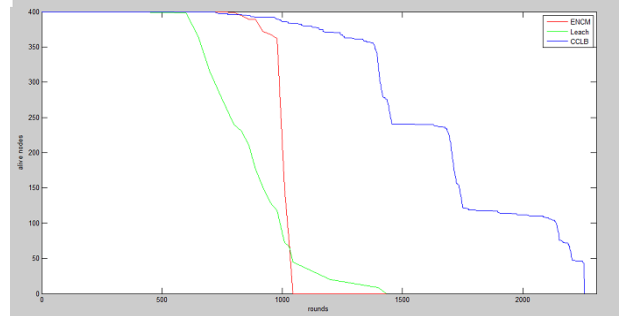


Figure 1

REFERENCES

1. Cao Guohong, Yin Liangzhong and. Das Chita R (2004) Cooperative based data access in Ad Hoc Networks. *IEEE Computer Society*.
2. I.F A and Su W and Sankarasubramaniam Y and Cayirci E (2002) Wireless sensor networks: a survey. *IEEE Communications Magazine* 40(8) : 102- 114.
3. Kaur N and Bansal M (2012) Energy Efficient and Intelligent Clustering Protocol for WSN Based on STBC transmission: IEEE.
4. Li Jinbao and Ji Shouling (2008) Data Caching Based Queries in Multi-Sink Sensor Networks. *IEEE Fifth International Conference on mobile Ad-hoc and Sensor Networks*: 9-16.
5. Lim H, Kim S, Yeo H, Kim S and Ahn K (2007) Maximum Energy Routing Protocol based on Strong Head in Wireless Sensor Networks. *Sixth International Conference on Advanced Language Processing and Information Technology* pp. 414-19.
6. Rahman A Md and Hussain S (2007) Effective Caching in Wireless Sensor Network. *21st International Conference on Advanced Information Networking and Applications Workshops* 1: 43-47.
7. Sharma T P and Joshi R C (2008) Dual Radio Based Cooperative Caching for Wireless Sensor Networks. *16th IEEE International Conference on Digital Object Identifier* pp. 1-7.
8. Wei H, Chen L and Zhang Y (2012) proposes a protocol, Expected Number of Cluster Members clustering algorithm in International Conference on Systems and Informatics (ICSAI 2012)
9. Xu Junfeng, Li Keqiu and Shen YanMing (2008) An Energy-Efficient Waiting Caching Algorithm in Wireless Sensor Networks. *IEEE/IFIP International Conference on Embedded and Ubiquitous Computing* 1: 323-29.
10. Ye F, Luo H, Cheng J and Lu S (2002) A Two Tier Data Dissemination Model for Largescale Wireless Sensor Networks. *8th annual international conference on Mobile computing and networking* pp. 148-59.
11. Zhang Y, Kuhn L and Fromherz M(2004) Improvements on Ant Routing for Sensor Networks. *Ant Colony Optimization and Swarm Intelligence*, LNCS, 3172, pp. 289-313.
12. Zungeru A M, Ang L M, Prabaharan S and Seng K (2011) Improved energy efficient ant-based routing algorithm in wireless sensor networks. Ragab K, Abdullah A B, Zaman N (ed.). *Wireless Sensor Networks and Energy Efficiency: Protocols, Routing and Management*, 20. Hershey, PA 17033, USA: IGI Global, pp. 420-44.