

Minimum Cost Design of PSC Post-Tensioned I-Girder for Short to Medium Span Bridges

Devashree Sawant, N. G. Gore, P. J. Salunke

Abstract: Post-tensioned simply supported pre-stressed concrete (PC) I-girder bridges are widely used bridge system for short to medium span (20m to 50m) highway bridges due to its moderate self-weight, structural efficiency, ease of fabrication, low maintenance etc. In order to compete with steel bridge systems, the design of PC I-girder Bridge system must lead to the most economical use of materials. In this study, minimum cost design approach of a post-tensioned PC I-girder is presented. The objective is to minimize the total cost in the design process of the bridge system considering the cost of materials. For a particular girder span and bridge width, the design variables considered for the cost minimization of the I-girder, are top flange width, girder depth, bottom flange thickness, number of cables i.e. X1, X2, X3, X4 respectively. Design constraints for the optimization are considered according to AASHTO (American Association of State Highway and Transportation Officials), IS: 1343-1980 and Geometrical design requirements. The optimization problem is solved by having a combination of continuous, discrete and integer sets of design variables and multiple local minima. For An optimization purpose Matlab Software with SUMT (Sequential Unconstrained Minimization Technique) is used that is capable of locating directly with high probability the minimum design variables. The proposed cost optimization approach is validated which leads to a considerable cost saving while resulting in feasible design.

Keywords: constraints, design variables, Pre-stressed concrete, structural optimization.

I. INTRODUCTION

In conventional structure design process, the design method proposes a certain solution that is validated by mathematical analysis in order to verify that the problem requirements or specifications are satisfied. If such requirements are not satisfied, then a new solution is proposed by the designer based on his intuition experience. The process undergoes many manual iterations before the design can be finalized making it a slow and very costly process. There is no formal attempt to reach the best design in the strict mathematical sense of minimizing cost. The process of design is relied exclusively on the designer's experience, intuition and creativity resulting in high cost in terms of times and human efforts.

Revised Manuscript Received on 30 March 2014.

* Correspondence Author

Miss Devashree Uday Sawant*, (M.E.-STRUCTURE student) Civil Engg. Dept., M.G.M. College of Engineering & Tech., Kamothe, Navi Mumbai, India.

Prof. N. G. Gore, (Guide) Civil Engg. Dept., M.G.M. College of Engineering & Tech., Kamothe, Navi Mumbai, India.

Prof. P. J. Salunke, (Guide) Civil Engg. Dept., M.G.M. College of Engineering & Tech., Kamothe, Navi Mumbai, India.

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an open access article under the CC-BY-NC-ND license <http://creativecommons.org/licenses/by-nc-nd/4.0/>

An alternative to the conventional design method is optimum design. An optimum design normally implies the most economic structure without harming the functional purposes of the structure. An optimization technique transforms the conventional design process of trial and error into a formal and systematic procedure.

Pre-stressed concrete (PC) I-girder bridge systems are ideal as short to medium span (20 to 40 m) highway bridges because of their moderate self-weight, structural efficiency, ease of fabrication, fast construction, low initial cost, long life expectancy, low maintenance, simple deck removal, and replacement. Large and important projects containing I-girder bridge structures have the potential for substantial cost reduction through application of optimum design methodology and thus, will be of great value to practicing engineers.

Rana et al. (2010) presented Cost optimization approach of a post-tensioned PC I-girder bridge system. A global optimization algorithm named EVOP (Evolutionary Operation) was used. The comparison was made between optimum design and a real life project named Teesta Bridge. This comparison leads up to 35% saving. Ahsan et al. (2012) presented an optimization approach to the design of simply supported, post-tensioned, pre-stressed concrete I-girder bridges. Sami et al (1996) presented a systematic procedure for selecting the most economic girder type and spacing for a given span. They conclude that it is more economical to space the girders at their maximum spacing. Macrae et al (1984) presented a computer approach to the optimal design of structural concrete beams. An optimal design program called OSCON was used for this purpose. The main objective of this study was Minimizing the amount of reinforcement for a given concrete-section, evaluating the effect of steel cost ratios on optimal solutions, Optimizing the section shape of partially pre-stressed concrete beams, Analysis of given designs with respect to all relevant criteria.

II. PROBLEM FORMULATION

Design variables

For a particular girder span and bridge width, a large number of parameters control the design of the bridge such as girder spacing, cross sectional dimensions of girder, deck slab thickness, number of strands per tendon, number of tendons, deck slab reinforcement, configuration of tendons, anchorage system, pre-stress losses, concrete strength etc. the design variables consider in this study are tabulated in Table 1. A typical cross-section of the PC I-girder is illustrated in Fig. 1 to highlight several of the design variables reflect in this study.

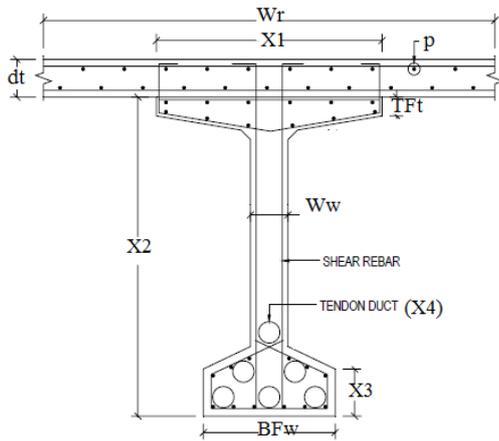


Fig. 1 Girder composite section with design variables

Pre-stress is considered to be applied in two stages, a percentage of total pre-stress at initial stage to carry only the girder self-weight and stress produced during lifting and transportation and full pre-stress during casting of deck slab.

Table1. Design variables with constraints

Sr No.	Design Variables	Constraints
1	Top flange width (X1)	$300 \leq X1 \leq S$
2	Girder depth (X2)	$1000 \leq X2 \leq 3500$
3	Bottom flange thickness (X3)	$a \leq X3 \leq 600$
4	Number of cables (X4)	$1 \leq X4 \leq 20$

a= clear cover + duct diameter, S= Girder spacing

III. OBJECTIVE FUNCTION

The objective function in the present optimization problem is the cost of PSC slab bridge deck whose main components are cost of concrete, and pre stressing steel. It is assumed that cost of steel, launching and casting formwork etc. are directly proportional to volume of concrete, hence all these cost are included in the rate of concrete. It is also assumed that cost of anchor, sheathing etc. are directly proportional to volume of pre-stressing steel, hence all these cost are included in the rate of pre-stressing steel.

Objective function can be expressed as:

$$\text{TOTALcost} = Q_{\text{conc}} * C_{\text{cost}} + Q_{\text{steel}} * S_{\text{cost}}$$

Rate of objective function can be expressed as,

Q_{conc} = Quantity of concrete in m^3

Q_{steel} = Quantity of steel in Kg

C_{cost} = Cost of concrete/ m^3

S_{cost} = Cost of steel/ Kg

IV. CONSTRAINTS

These are specified limitation (upper or lower limit) on design variables which are derived from geometric requirements (superstructure depth, clearances etc.), minimum practical dimension for construction, code restriction etc. The constraint is defined as

$$X_L \leq X \leq X_U \dots \dots \dots (1)$$

Where

X = Design variable.

X_L = Lower limit of the design variable.

X_U = Upper limit of the design variable.

Table 2 Constraint equation:

Check for minimum section modulus	$G1 = (Zb2/Zb1) - 1$
Pre-stressing force	$G2 = ((p/Psf) - 1)$
Permissible tendon zone at support section	$G3 = ((es/J) - 1)$
Permissible tendon zone at support section	$G4 = ((es/K) - 1)$
Stresses at transfer stage at top	$G5 = ((Ft/Sgtr) - 1)$
Stresses at transfer stage at bottom	$G6 = (Sgbt/Fct) - 1$
Stresses at working load stage at top	$G7 = (Sgtw/Fcw) - 1$
Stresses at working stage at bottom	$G8 = (Ftw/Sgbw) - 1$
Check for ultimate flexural strength	$G9 = (Mu1/Mu2) - 1$

V. OPTIMIZATION METHOD

Mathematical Programming Techniques

1. Calculus Method
2. Calculus Of Variations
3. Nonlinear Programming
4. Geometric Programming
5. Quadratic Programming
6. Linear Programming
7. Dynamic Programming
8. Integer Programming
9. Stochastic Programming
10. Separable Programming
11. Multi Objective Programming
12. Cpm & Pert
13. Game Theory

Stochastic Programming Techniques

1. Stastical Decision Theory
2. Markov Processes
3. Queing Theory
4. Renewal Theory
5. Simulation Methods
6. Reliability Theory

Statistical Method

1. Regression Analysis
2. Cluster Analysis
3. Design of Experiments
4. Discriminate Analysis

The optimum cost design of I-Girder formulated in is nonlinear programming problem (NLPP) in which the objective function as well as constraint equation is nonlinear function of design variables. The various methods available for the solution of NLPP are compared in brief and the advantages and limitation of the chosen method is discussed. The various subroutines used in the program are also discussed.

Methods for the Solution of the NLPP

1. Method of Feasible Directions
2. Sequential Unconstrained Minimization Technique (SUMT)
3. Sequential Linear Programming (SLP)
4. Dynamic Programming

The sequential unconstrained minimization technique (SUMT)

In SUMT the constraint minimization problem is converted into unconstrained one by introducing penalty function. In the present work is of the form, $f(x, r)$ is the penalty function $f(x)$ is the objective function r is the non-negative penalty parameter, and m is the total number of constraints. The penalty function (x, r) is minimized as an unconstrained function of x and r , for a fixed value of r . The value of r is reduced sequentially and the sequence of minima obtained converges to the constrained minimum of problems as $r \rightarrow 0$.

Computer program

The present optimization problem is solved by the interior penalty function method. The method is used for solving successive unconstrained minimization problems coupled with cubic interpolation methods of one dimensional search. The program developed by S. S. Rao for SUMT is used for the solution of the problem. The program is written in Matlab language.

VI. SUMMARY

The objective of this study is to investigate the appropriate optimization method to the minimum cost of a PSC I Girder. In view of achieving this objective it is decided to develop a computer code in MATLAB. After validating this computer code by comparing the results with analytical results, it is planned to carry out the economical and safe design. The cost comparison of conventional design to optimum design of PSC I-girder is given in Table 3. The below problem is solved considering span as 20m, type of pre-stressing steel as 12.7mm 7k H.T. strands, grade of concrete used is M50.

Table 3 Comparison of conventional design to optimum design

	X1	X2	X3	X4	TOTAL COST (Rs)
CD	650	1950	370	5	178544
OD	300	1712	345	5	157687

Where,

CD= Conventional Design

OD= Optimum Design

$$\% \text{ saving} = \left\{ \frac{178544 - 157687}{178544} \right\} * 100 = 11.68 \%$$

The comparison cost and quantity of steel and concrete is shown in Table 4 which shows quantity required in M50 grade concrete is comparatively less than M40 and M60. This shows that use of M50 grade concrete is more cost-effective than other grades in shorter span. The below problem is solved considering span as 20m, type of pre-stressing steel as 12.7mm 7k H.T. strands.

Table 4 comparison of minimum cost using M40, M50, M60 grade concrete

Grade of concrete	M40		M50		M60	
	SP	OP	SP	OP	SP	OP
X1	600	300	600	300	600	300
X2	2000	1927	2000	1714	2000	1659
X3	400	345	400	345	400	345
X4	5	5	5	5	5	5
Qsteel (Kg)	876	851.92	876	841.8	876	839.2
Qconcrete (m ³)	12.59	10.47	12.59	9.62	12.59	9.39
Total Cost	174460	159790	179495	157746	187047	161773

Where,

SP= Starting Point

OP= Optimize Point

VII. CONCLUSIONS

1. It is possible to formulate and obtain solution for the minimum cost design for PSC I-Girder.
2. It is possible to obtain the global minimum for the optimization problem by starting from different starting points with the interior penalty function method.
3. Significant savings in cost over the normal design can be achieved by the optimization. However the actual percentage of the saving obtained for optimum design for PSC I-Girder depend upon the span of slab and grade of material.
4. Maximum cost saving of 11.68% for conventional design is achieved in PSC I-Girder 20m span of M50 grade concrete.
5. The cost of PSC I-Girder decreases with the increase in the girder depth.
6. It is also seen that using M50 grade of concrete is more economical than other grade of concrete (i.e. M40, M60) in combination with the material M20/Fe415 for slab deck for shorter span girder.
7. Also it has been seen that use of 12.7mm dia strand is more economical than 15.2mm dia strand.

ACKNOWLEDGMENT

I take this opportunity to thank staff members of Civil Engineering Department, Mahatma Gandhi Mission's College of Engineering and Technology, Kamothe, library staff for their assistance useful views and tips. A word of thanks is also reserved for all my batch mates for their selfless help, support and entertaining company.

REFERENCES

1. M. Z. Colin, and A. J. Mac Rae (1984) "Optimization Of Structural Concrete Beams" Journal Of Structural Engineering, American Society of Civil Engineering, Pp.1573-1588.
2. James Tyvand, A. M. and Arthur T. Blachly (1986) "Foamed Plastic Absorbs Staged Post-Tensioning Deflections" Journal Of Construction Engineering, American Society of Civil Engineering, Pp.582-587.
3. Hany Abdalla and John B. Kennedy (1995) "Design Of Pre-stressed Concrete Beams With Openings" Journal Of Structural Engineering, American Society of Civil Engineering, Pp.894-898.
4. Sami M. Fereig (1996) "Economic Preliminary Design Of Bridges With Pre-stressed I-Girders" Journal Of Bridge Engineering, American Society of Civil Engineering.
5. Nabil F. Grace and Brian Ross (1996) "Dynamic Characteristics of Post-tensioned Girders with Web Openings" Journal Of Structural Engineering, American Society of Civil Engineering, Pp.643-650.
6. Charles G. Schilling. (1996) "Yield-Interaction Relationships For Curved I-Girders" Journal Of Bridge Engineering, American Society of Civil Engineering, Pp. 26-33.
7. Z. Lounis, M. S. Mirza, M. Z. Cohn, and Fellow, (1997) "Segmental And Conventional Precast Pre-stressed Concrete I-Bridge Girders" Journal Of Bridge Engineering, American Society of Civil Engineering, Pp.73-84
8. Bradley N. Robson and Issam E. Harik (1998) "Pullback Testing Of Seismically Isolated P/C I-Girder Bridge" Journal Of Structural Engineering, American Society of Civil Engineering, Pp.643-650.
9. Jeffrey A. Laman (1999) "Load Distribution and Impact Factors For I-Girder Bridges" Journal Of Bridge Engineering, vol 2.



10. Paul J. Barr, Marc O. Eberhard, and John F. Stanton (2001) "Live-Load Distributions Factors In Pre-stressed Concrete Girder Bridges" *Journal Of Bridge Engineering*, American Society of Civil Engineering, Pp.298-306.
11. N. Robson, I. E. Harik, and V. Gupta (2001) "Effectiveness Of Seismic Isolation Of Highly Skewed P/C I-Girder Bridge" *Journal Of Bridge Engineering*, American Society of Civil Engineering, Pp.211-214.
12. D. Linzell, D. Hall, and D. White. (2004) "Historical Perspective on Horizontally Curved I Girder Bridge Design in the United States" *Journal Of Bridge Engineering*, American Society of Civil Engineering.
13. Peter Kocsis, and P.E., (2004) "Evaluation of AASHTO Live Load and Line Load Distribution Factors for I-Girder Bridge Decks", *Practice Periodical On Structural Design And Construction* American Society of Civil Engineering, Pp.211-215.
14. Joseph Yura, Todd Helwig, Reagan Herman, and Chong Zhou, A.M. (2008) "Global Lateral Buckling of I-Shaped Girder Systems" *Journal Of Structural Engineering*, American Society of Civil Engineering, Pp.1487-1494.
15. Benjamin A. Graybeal (2008) "Flexural Behavior of an Ultrahigh-Performance Concrete I-Girder", *Journal Of Bridge Engineering*, American Society of Civil Engineering, vol.13.
16. Benjamin Z. Dymond, Carin L. Roberts-Wollmann, and Thomas E. Cousins (2010) "Shear Strength of a Lightweight Self-Consolidating Concrete Bridge Girder" *Journal Of Bridge Engineering*, American Society of Civil Engineering, Pp.615-618
17. S. Rana & R.Ahsan (2010) "Design of pre-stressed concrete I-girder bridge superstructure using optimization algorithm" *Journal Of Bridge Engineering*.
18. David A. Petty, Paul J. Barr, G. Parry Osborn, Marvin W. Halling, and Travis R. Brackus (2011) "Carbon Fiber Shear Retrofit of Forty-Two-Year-Old AASHTO I-Shaped Girders" *Journal Of Composites For Construction*, American Society of Civil Engineering, Pp.773-781.
19. Raquib Ahsan, Shohel Rana, and Sayeed Nurul Ghani (2012) "Cost Optimum Design of Posttensioned I-Girder Bridge Using Global Optimization Algorithm" *Journal of Structural Engineering*, American Society of Civil Engineering, Pp.273-284.
20. Se-Jin Jeon, Myoung-Sung Choi, and Young-Jin Kim (2012) "Graphical Assessment for Span Ranges of PSC Girder Bridges" *Journal Of Bridge Engineering*, American Society of Civil Engineering, Pp.343-352.
21. N. Krishna Raju (2007) "pre-stressed concrete" Tata mcgraw hill publication Pp. 613-653.