

PAPR Reduction using Parallel PTS and SLM scheme with OGWO in MIMO-OFDM

K.Aruna Kumari, K.Sri Rama Krishna

Abstract: To progress the existing PAPR reduction techniques, we have incorporated ideal SLM and PTS based PAPR reduction strategy in parallel. By utilizing, the OGWO algorithm; the transmit succession was chosen with least PAPR above all communication antennas. The proposed PAPR reduction approach is applied independently on each transmitted antenna, and so the PAPR can be extremely reduced. Moreover, the OGWO optimization based PAPR reduction technique will provide better performance and it was been promoted as an uncomplicated way for PAPR reduction. The proposed approach will be analyzed with various novel PAPR reduction schemes to show the effectiveness.

Index Terms: OFDM, MIMO, PAPR, SLM

I. INTRODUCTION

Orthogonal frequency division multiplexing (OFDM) is regularly utilized for high information rate wireless interchanges because of its inherent error robustness in a multipath environment.^[1]. Combination of MIMO system with OFDM has a major consideration for the subsequently making broadband utilization suitable to their probable of provide soaring data rate, toughness to desertion channels and consistent communication. MIMO-OFDM has been set up in different remote correspondence standards, for example, IEEE 802.11a/g, remote metropolitan territory systems (WMANs), overall interoperability for microwave get to (WiMAX), and 3GPP Long Term Evolution^[2]. Power efficiency can be improve by maximizing spatial diversity. By changing a frequency-selective MIMO channel into a set of parallel frequency-flat MIMO channels, OFDM diminishes the complexity of the MIMO receiver.^[3]. Though, MIMO-OFDM encounters crisis of elevated crest to normal power ratio to outcome in non-linear deformation of the passed on motion at lifted power enhancer^[4]. The transmitter has a high PAPR in case of normal power which is basically reduced, with reference to a steady immersion control. In these cutting edge business remote structures, the PAPR issue is huger in uplink^[5] in light of the fact that this is the limiting association to the extent extension and range^[6], and as the portable terminal is compelled in battery control, the adequacy of the power enhancer is basic. Various strategies have been proposed for lessening in OFDM frameworks of PAPR for example cutting^{[7] [8]}, fractional transmit successions (PTS)^{[8] [9]}, particular mapping (SLM)^{[8][10]}, tone reservation, and so on. The stage pivots are picked so that the PAPR is limited^{[11], [12]}. Selected Mapping (SLM) strategy is the most skilled diminishment technique to decrease Peak to Average Power Ratio (PAPR) of Orthogonal Frequency

Division Multiplexing (OFDM) system^[13] without flag twisting. Under various engendering, topology or movement conditions this paper plans to build up a methodical approach for PAPR decrease. Here we utilized Parallel PTS and SLM plan to productively diminish the PAPR in MIMO OFDM System. Next area gives an audit on different accessible strategies for diminishment of PAPR in MIMO OFDM System.

II. PROPOSED METHODOLOGY

The major challenging concern in MIMO-OFDM system is the high PAPR, to limit this problem different reduction algorithms were proposed. Selective mapping SLM and Partial transmit sequence (PTS) are the most efficient technique used to reduce the PAPR in multicarrier transmissions without causing distortion in the signal. We use SLM and PTS techniques parallel in MIMO-OFDM system to reduce the PAPR. For the diminishment of this PAPR a considerable measure of strategies has been introduced beneath. Here we have proposed two PAPR diminishment procedures in parallel way. They are

- a. Partial Transmit Sequence (PTS)
- b. Selected Mapping (SLM)

A. Figures and Tables Partial Transmit Sequence(PTS)

In MIMO-OFDM signals, PTS procedure is for the most part used to lessen the PAPR decrease. This technique at first parts the recurrence vector into few squares. Before applying the stage changes in MIMO-OFDM signals the above recurrence division method is finished.

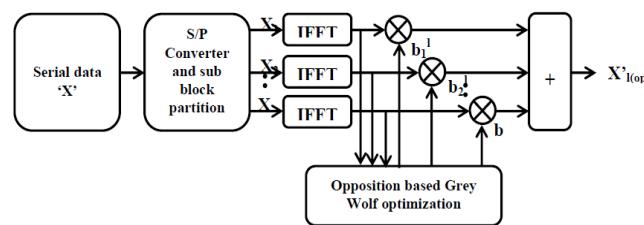


Figure 1. Block diagram of PTS

B. Selected Mapping (SLM) Method

From the first information obstruct various option OFDM signals is made at first and after that transmit the OFDM flag having minimum PAPR is the major idea of this framework. This is a compelling and twisting less strategy used for the PAPR reducing in OFDM.

Revised Manuscript Received on April 07, 2019.

K.Aruna Kumari, Sr.Asst Professor, ECE Department, PVPSIT, Vijayawada, AP, India

Dr.K.Sri Ramakrishna, Professor, ECE Department, VR Sidhartha Engineering College, Vijayawada, AP, India.

The name of this method shows that one grouping must be picked out of different



PAPR Reduction using Parallel PTS and SLM scheme with OGWO in MIMO-OFDM

plans. According to the possibility of discrete time OFDM transmission we should impact an information square considering number of images from the star grouping plot. The figure 2 offers depiction about the transmitter side of the SLM framework. This chose OFDM motion at transmitter side must be seen at the collector. So the collector must have the data about the ideal stage vector that has been increased to create that chose OFDM.

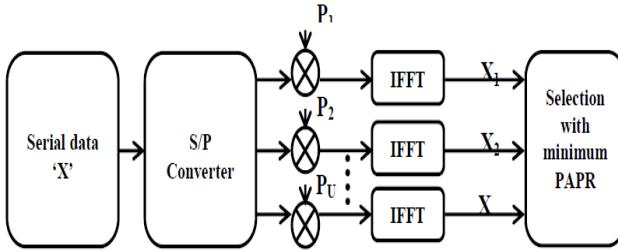


Figure 2: Block diagram of SLM

III. PROPOSED WOLF OPTIMIZER (GWO)

The GWO calculation, proposed is hopeful with the chasing conduct and social administration of dim posers. It resembles other meta-heuristics, and in GWO calculation the pursuit begins by a populace of discretionarily made wolves (competitor arrangements). Keeping in mind the end goal to imagine the social chain of command of wolves when planning GWO, in this calculation the populace is part into four gatherings: alpha (α), beta (β), delta (δ), and omega (ω). Through the traverse of accentuations, the underlying three best arrangements are called α, β , and δ , separately. Whatever is left of the hopeful arrangements are named as ω . The social predominant progression is instanced as in figure. 3

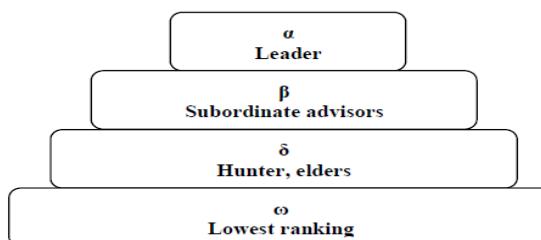


Figure3. Social hierarchy of wolf

IV. RESULTS

This section contains result and discussion about PAPR Reduction using Parallel PTS and SLM scheme with MIMO OFDM. Both the techniques SLM and PTS have been clubbed to attain better performance. The proposed algorithm is executed using MATLAB software and the experimentation is carried out using a system of having 4 GB RAM and 2.10 GHz Intel i-3 processor. This area demonstrates applicable implications of presented technique. Here, we have compared our presented system OGWO with GWO and AABC techniques. The resultant data obtained for PAPR vs. CCDF for both the proposed and existing methodologies. By calculating the PAPR vs. CCDF, proposed method OGWO obtains the maximum value when compared

with other existing technologies. The bit error ratio of the proposed and existing technique is depicted in figure 4.

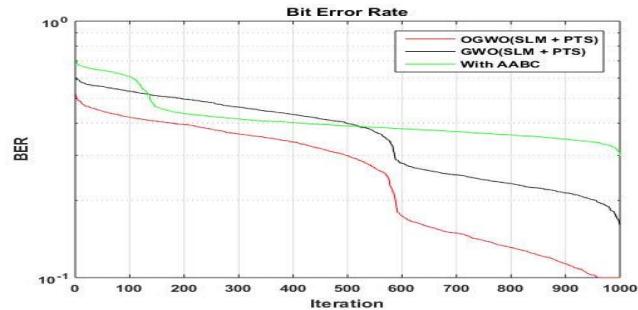


Figure 4. BER for proposed and existing methodologies

It can note from the above graph that the bit error ratio for the proposed technique is considerably lower than existing techniques. Bit error ratio represents the output corrective level, hence the through for proposed technique is better in terms of BER.

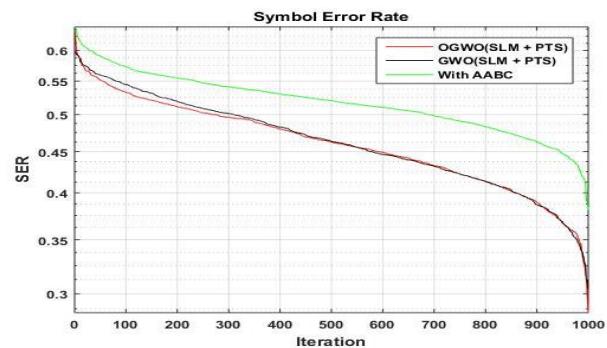


Figure 5. SER for proposed and existing methodologies

It can be observed from figure 5, symbol error ratio for the proposed technique is decreasing considerably faster than existing techniques. Moreover proposed method showed better results than existing technique. The proposed PAPR vs. CCDF graph for the proposed and the existing techniques is given in figure 6.

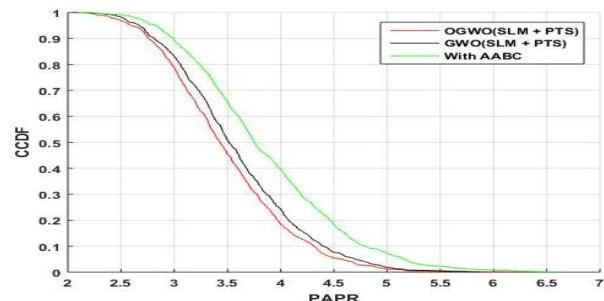


Figure 6. Comparison of PAPR vs. CCDF for proposed and existing methodologies

It can be noted from above figure that PAPR reduction takes place in every technique but for the proposed technique PAPR takes place in short period of time. Moreover, the



PAPR has been reduced whereas; it is more in the existing technique. The main motive of the work was to attain less PAPR as much as possible, which proves the efficiency of the technique.

V. CONCLUSION

In this paper, we have anticipated oddity based Oppositional Gray Wolf Optimizer (OGWO) calculation utilizing SLM and PTS in parallel frame to decrease PAPR in MIMO-OFDM framework. For remote correspondences, OFDM is an exceptionally alluring strategy because of its range productivity and channel vigor. The transmitted flag shows a high PAPR when the information groupings are corresponded is the one of the significant disadvantages in MIMO-OFDM frameworks. In the present work, two divergent PAPR diminishment strategies, i.e., SLM and PTS have been executed on the MIMO-OFDM conspire and the PAPR lessening parameter has been dissected. The result demonstrates that both the SLM plan and PTS plot are more compelling to diminish PAPR in MIMO-OFDM frameworks. With the reproduction ponders, it has been demonstrated that the proposed calculation lessens PAPR prevalent than the current frameworks.

Ethical clearance - Not required

Source of funding- Self

Conflict of Interest - PAPR Reduction using Parallel PTS and SLM scheme with OGWO in MIMO-OFDM

REFERENCES

1. ZID Souad, BOUALLEGUE Ridha," Low-Complexity PAPR Reduction Schemes Using SLM and PTS Approaches for Interleaved OFDMA" IEEE Communications Surveys & Tutorials, Volume: 15, Issue: 4, 2013.
2. Hongwei Yang, Alcatel Shanghai Bell," A Road to Future Broadband Wireless Access: MIMO-OFDM-Based Air Interface",IEEE Communications Magazine , Volume: 43, Issue: 1, 2005.
3. Francisco Sandoval , GwenaelPoitau , François Gagnon," Hybrid Peak-to-Average Power Ratio Reduction Techniques: Review and Performance Comparison" IEEE Access ,Volume: 5,2017.
4. Sadhana Singh, Arvind Kumar,"Performance Analysis of Adaptive Clipping Technique for Reduction of PAPR in Alamouti Coded MIMO-OFDM Systems", International Conference On Advances In Computing & Communications, ICACC 2016.
5. K. Anoh, C. Tanriover, and B. Adebiyi, "On the optimization of iterative clipping and filtering for PAPR reduction in OFDM systems," IEEE Access, vol. 5, pp. 12004–12013, 2017..
6. F. Khan, LTE for 4G Mobile Broadband: Air Interface Technologies and Performance. Cambridge, U.K.: Cambridge Univ. Press, ch. 5, pp. 88–108.,2009.
7. J. Armstrong. Peak-to-average power reduction for OFDM by repeated clipping and frequency domain filtering. IEE Electronic Lett 2002; 38: 246–247.
8. Y. Rahmatallah, S. Mohan. Peak-to-average power ratio reduction in OFDM systems: A survey and taxonomy. IEEE communications surveys & tutorials, vol. 15, no. 4, pp.1567-1592, fourth quarter, 2013.
9. J. Hou, J. Ge, J. Li. Peak-to-average power ratio reduction of OFDM signals using PTS scheme with low computational complexity. IEEE Trans Broadcast; pp: 143–148, 2011.
10. R. W. Bauml, R. F. H. Fisher, J. B. Huber. Reducing the peak-to-average power ratio of multicarrier modulation by selected mapping. IEE Electronic Lett, Pp2056–2057,1996.

11. O. Kwon and Y. Ha, Multi-carrier PAP reduction method using suboptimal PTS with threshold, IEEE Transactions on broadcasting, Vol. 49, No. 2, 2003.
12. S. H. Han and J. H. Lee, An Overview of Peak-To-Average Power Ratio Reduction Techniques for Multicarrier Transmission, IEEE Wireless Communications, April 2005.
13. SnikdhoSworovHaque , Md. MunjureMowla , Md. MehediHasan , ShaumendraKumer Bain," An Algorithm for P APR Reduction by SLM Technique in OFDM with Hadamard Matrix Row Factor", Electrical Engineering and Information Communication Technology (ICEEICT), 2015.
14. M.V.R. Vittal, K. Rama Naidu," A novel reduced complexity optimized PTS technique for PAPR reduction in wireless OFDM systems",Egyptian Informatics Journal, Volume 18, Issue 2, Pages 123-131, 2017.
15. M.V.R. Vittal, K. Rama Naidu," A Novel Parallel Artificial Bee Colony Algorithm and its PAPR Reduction Performance Using SLM Scheme in OFDM and MIMO-OFDM Systems" IEEE Communications Letters , Volume: 19, Issue: 10, Oct. 2015.
16. SimingPeng, Aijunliu, Kewang, XiaohuiLiang," PAPR Reduction of Multicarrier Faster-Than-Nyquist Signals With Partial Transmit Sequence",IEEE Access ,Volume: 5,2017.
17. Jun Hou, Xiangmo Zhao, Fengkui Gong, FeiHui, and JianhuaGe," PAPR and PICR Reduction of OFDM Signals with Clipping Noise-based Tone Injection Scheme", IEEE Transactions on Vehicular Technology ,Volume: 66, Issue: 1, 2017.
18. Sen-Hung Wang, Kuan-Chou Lee, Chih-Peng Li," A Low-Complexity Architecture for PAPR Reduction in OFDM Systems with Near-Optimal Performance", IEEE Transactions on Vehicular Technology ,Volume: 65, Issue: 1, 2016.
19. Hyun-SeungJoo, Kee-Hoon Kim, Jong-Seon No, Dong-Joon Shin," New PTS Schemes for PAPR Reduction of OFDM Signals Without Side Information" IEEE Transactions on Broadcasting ,Volume: 63, Issue: 3, 2017.
20. D. Kumutha, N. Amutha Prabha," Hybrid STBC-PTS with enhanced artificial bee colony algorithm for PAPR reduction in MIMO-OFDM system",Journal of Ambient Intelligence and Humanized Computing, pp 1–17,2017

AUTHORS PROFILE



K.Aruna Kumari received B. Tech degree in Electronics and Communication Engineering from JNTUA and M.Tech in Communication Systems from JNTUA. She is working as an Sr.Asst.Prof. in PVPSIT, Vijayawada, affiliated to JNTUK, Kakinada, India. Her areas of interest are Communications and Networks..She Published papers 02 in International conferences and Journals.



Dr.K.Sri Rama Krishna is working as Professor & HOD of E.C.E Dept, V R Siddhartha Engg College, Vijayawada. He Completed his doctoral degree in the year 2001 from Andhra University, Vizag His areas of interest include Microwaves, Neural Networks, Wavelet Transforms, Genetic algorithms, Evolvable Computing, Image Processing, Signal Processing. He Published papers in International conferences and Journals. He is a fellow of IETE and IE (I).

