

Performance of HCCI engine with Various Modes of Charging Operations



A.Renuka Prasad, Rakesh Bhandari

Abstract: Homogeneous Charged Compression Ignition technology is most favorable or suitable for Internal Combustion engines for reducing the exhaust emissions and enhances the Thermal efficiency, improve the fuel consumption, and increase the rate of combustion. This paper represents the various charging methods on HCCI technology engine, it improves the engine performance and determines the emission characteristics of HCCI technology engine. The homogeneous mixture prepared with different methods. In γ -cylinder internal homogeneous mixture preparation method applied in this present work. It reduces the exhaust emissions released from the combustion chamber. However, oxides of nitrogen and soot emissions are significantly reduce, because combustion starts at lower temperatures and various points in combustion chamber.

Keywords : HCCI technology, homogeneous mixture, thermal efficiency, combustion rate, and emissions.

I. INTRODUCTION

Actually engine is a device, it transforms energy from one form to another form. The thermal energy is converted into mechanical energy, it is known as Heat Engine. Basically heat engines are classified as Internal Combustion engines and External Combustion engines. Compared to External combustion engines, Internal combustion engines performs the better thermal efficiency, less amount of fuel consumption and reduces the exhaust emissions [1]. Therefore Internal Combustion engines are preferred. These are classified as Rotary type and Reciprocating type engines. The open cycle gas turbine and wankel engines are the examples of rotary type engines. The Gasoline and diesel engines are the examples of reciprocating type engines. The capacity of internal combustion may be defined as the displacement volume multiplied by the number of cylinders. The compression ratio of IC engines varies from 16 to 20. In internal combustion engines air is inducted in suction, by the piston movement air is compressed in cylinder [2-3]. At the end of compression stroke the fuel starts combustion in combustion chamber. With the high pressure fuel pump and injector, automatically starts combustion in engine. It generates the large amount exhaust emissions are oxides of

nitrogen and particulate matters, large fuel consumption and lower thermal efficiency.

To overcome the difficulties (or) drawbacks of internal combustion engines, Homogenous Charged Compression Ignition technology efficiently used. It generates fewer amounts of exhaust emissions and it improves the performance of the engine. It is the most promising technology for internal combustion engines and spark ignition engines and also efficiently control the emissions and environmental pollution in next generations. In this technique both fuel and air injected during suction stroke[4]. Combustion starts at lower temperatures and mixture ignites number of unknown places volumetrically entire engine cylinder. When, the combustion starts at lower temperatures, the small amount of exhaust emissions are generated. The fuel ignites more than one place inside cylinder, the formation of Particulate Matters are reduces. It is significantly reduces the Oxides of Nitrogen and PM matters. It is efficiently suitable for small size to large size applications [5].

II. HOMOGENEOUS MIXTURE PREPARATION

The Homogeneous mixture can be prepared either internally and externally. In internal preparation method the homogeneous mixture (fuel and air) prepared with in the engine cylinder and external preparation method homogeneous mixture prepared outside the engine cylinder. Internal preparation method a modification needed at engine inlet. In external preparation method, arrange the fuel injector at head instead of direct ignition concept [6-8]. In external preparation method large amount of mixture easily prepared before combustion in cylinder compared with the internal preparation method. Port fuel injection method is example of external preparation method.

In-cylinder internal preparation method enhances the engine performance and reduces the exhaust emissions released from the engine. The fuel economy and vibrations are efficiently controlled by this method. At high pressures homogeneous mixture can be easily prepared. Fuel combustion at all times depends on the injection time. Early injection method shows better performance compare to late direct injection method. Because of late injection fuel densities and temperature values are decreases. The fuel enters during suction, it can be divided into number of parts, and starts combustion in cylinder is known as premixed lean combustion. The exhaust emissions are controlled by quality of homogeneous mixture. In-cylinder internal preparation techniques to overcome the drawbacks in Port fuel injection method.

Manuscript published on November 30, 2019.

* Correspondence Author

A.Renuka Prasad*, Department of Mechanical Engineering, Sangam University, Bhilwara, INDIA. Email: avvarurenukaprasad@gmail.com.

Dr.Rakesh Bhandari, Department of Mechanical Engineering, Sangam University, Bhilwara, INDIA. Email: rakesh.bhandari@sangamuniversity.ac.in

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an [open access](https://creativecommons.org/licenses/by-nc-nd/4.0/) article under the CC-BY-NC-ND license <http://creativecommons.org/licenses/by-nc-nd/4.0/>

III. EXHAUST EMISSIONS

The exhaust emissions are hydrocarbons, oxides of nitrogen, oxides of carbon, sulphur dioxide, carbon dioxide, carbon monoxide and carbon particles are released from exhaust pipe of the engine [10-14]. These are polluting the atmosphere and generate global warming, acid rain, odours and smog in the environment. In 1940 first identify the air pollution as a problem in California. Because of huge amount of smoke and other pollutants are generated from factories and automobiles. In 1950 increases the smog and population with increase the automobiles. At this time, realized or identified automobiles are one of the major causes for environment pollution.

3.1 CARBON MONOXIDE (CO) EMISSIONS

It is a odorless, colorless and poisonous gas. The amount of CO emissions depends on the percentage of fuel air ratio [15]. In combustion, insufficient amount of oxygen at the combustion chamber all carbon particles converts into CO₂, if small amount of fuel is not ignited, it can be formed as carbon monoxide emission. The engine 0.2 to 5 percentages of carbon monoxide emissions are released. Due to improper mixing and low combustion rate are main causes producing CO emissions.

3.2 HYDROCARBONS (HC)

The combustion chamber of IC engine consists 4000ppm of hydrocarbon components. It is equivalent percentage of 1-1.5% of fuel. During combustion small non equilibrium components and large fuel molecules breaks up it formed as hydro carbons. It damages the engine operating parameters and combustion chamber geometry. HC emissions are enters into atmosphere, they react with irritants and odorants. The reasons for HC emissions incomplete combustion, fuel deposits on walls and wall over lap. Because of some fuel particles do not find and react with oxygen, improper mixing of fuel and air causes incomplete combustion [16]. However, complete combustion is not possible in combustion chamber. With the Homogenous Charged Compression Ignition Technology engines enhance the performance and lesser amount of exhaust emissions is released.

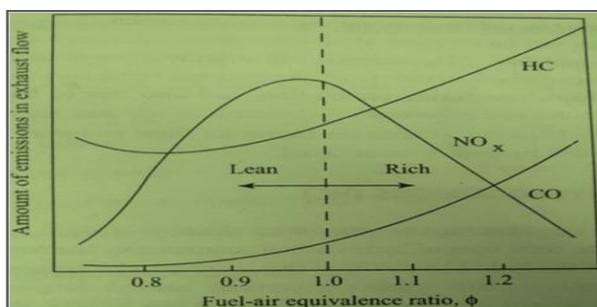



Fig.3.1: Exhaust emissions.

3.3 OXIDES OF NITROGEN (NO_x)

In exhaust emissions consists of 2000ppm oxides of nitrogen. It contains a nitrogen oxide and nitrogen dioxide. These are traces of other nitrogen-oxygen combinations. These are all formed NO_x, the x is represents the some

suitable number. The NO_x reacts with atmosphere, damage the ozone layer and formed smog. The amount of NO_x depends on the amount of nitrogen in the air [17]. The amount of N is highly depends on the temperature range from 2500-3000K. At lower temperatures small amount of NO_x is formed. It also depends on the air-fuel mixture and pressure in the cylinder. Combustion time is acting very important role in NO_x formation. The advanced HCCI technology reduces the NO_x formation and small amount of NO_x released in atmosphere.

The Smog creates a major problems in many cities in the world. The exhaust emissions are react with atmospheric air in the presence of sunlight, so the smog is formed (or) generated [18]. It damages the large amount of Crops, plants and creates harmful health problems for humans.



3.4 PARTICULATE MATTERS (PM)

The exhaust emission contains solid carbon soot particulates, produces in cylinder during the combustion process. They are in sphere shape; size varies from 9nm to 90nm. Mostly 15-30nm size particulates releases from engine. The single soot contains up to 5000 carbon spheres. These are generated at fuel rich zones in the combustion chamber. The carbon particles 90-95% originally generated from engine, it converted to CO₂. The particulate matters reduce with engine design and controls the operating conditions of the engine [19-20]. The combustion time increases, the formation of particulate quantity are reduces. HCCI technology method efficiently reduces the formation of Particulates matters in combustion proces. The high injection pressures generate a fine size and reduce HC and particulate emissions.

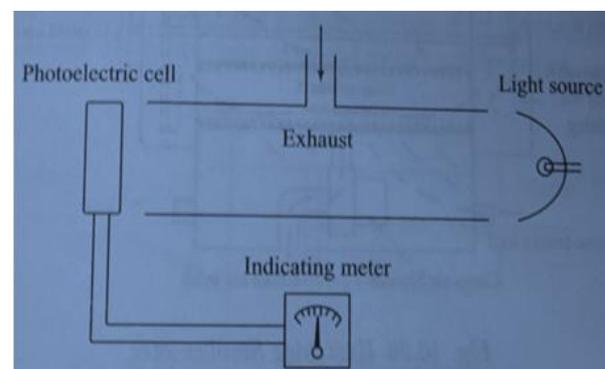


Fig.3.2: Measurement of smoke.

IV. EXPERIMENTAL SET-UP

The 5H.P. Kirloskar engine modified as a Homogeneous Charged Compression Ignition (HCC) technology engine. The homogeneous mixture can be prepared In-cylinder preparation method. The engine specifications are water cooled, stroke is 110mm, bore 87.5mm, and compression ratio is 17.50. Take the readings every 10cc of fuel consumption and manometer readings. The performance parameters thermal efficiency, specific fuel consumption are determined. To measure the speed and control the loads with rope brake dynamometer.

The various charging operations are Turbo charging (ET), HCCI mode (EH) and determine the performance parameters

both Turbo charging and HCCI technique (ETH) applied on HCCI engine. Fig.4.1. shows the experimental setup.

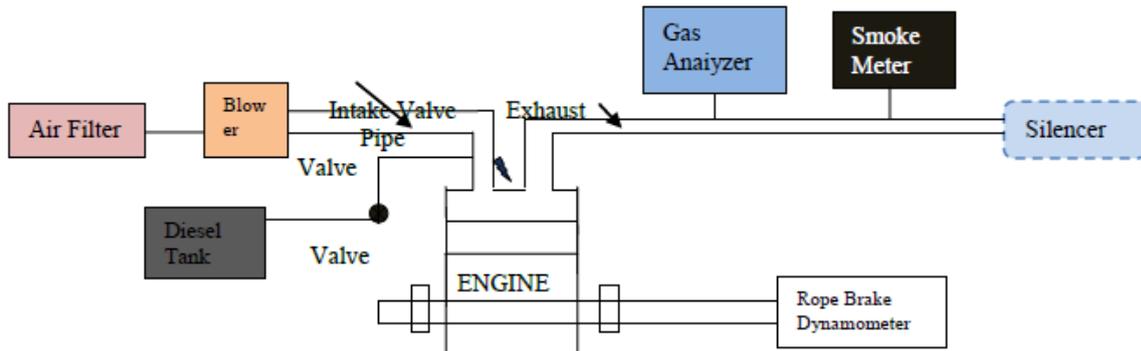


Fig.4.1: Experimental Set-up.

V. RESULTS & CONCLUSION

The different modes of charging operations are conducted on Homogeneous Charged Compression Ignition technology engine. The performance parameters specific fuel consumption and brake thermal efficiency and emission parameters oxides of nitrogen, hydro carbons and opacity (or) smoke are investigated. The effects of different modes of charging as discussed below.

EFFECTS OF DIFFERENT CHARGINGS ON HCCI ENGINE:

Figure 5.1 shows the load versus fuel consumption. It shows that brake specific fuel consumption reduces with varying the load. The effect of Turbo charging mode reduces the rate of fuel consumption.

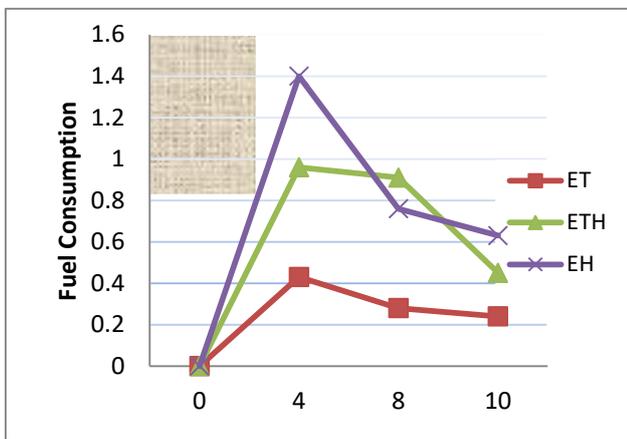


Fig. 5.1: Load v/s Brake specific fuel consumption

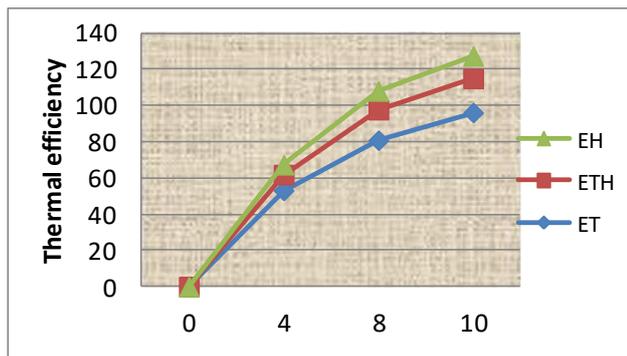


Fig.5.2: Load v/s Brake thermal efficiency.

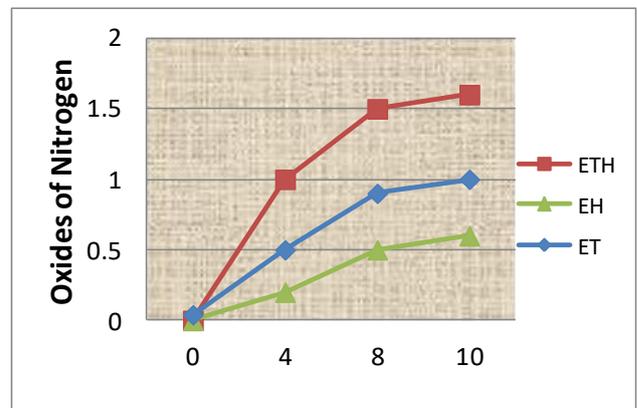


Fig.5.3: Load v/s Nitrogen of oxide.

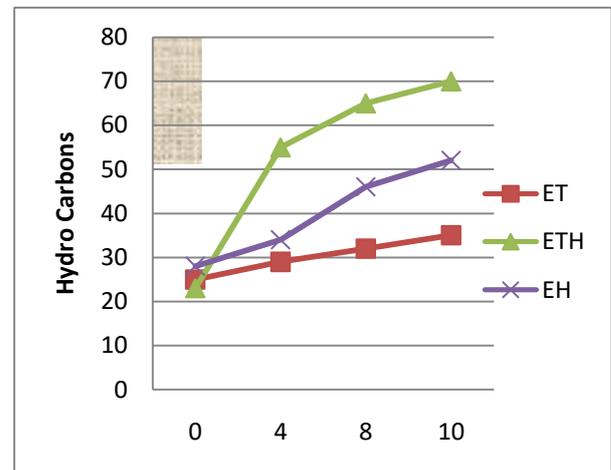


Fig.5.4: Load v/s Hydro carbons.

Figure 5.2 shows the graph of break thermal efficiency verses load. It shows that effect of HCCI mode of charging produces higher thermal efficiency. The Brake thermal efficiency always depends on the value of fuel consumption. The figure 5.3 shows the graph between oxides of nitrogen verses load. It shows that oxides of nitrogen emissions are significantly reduced with HCCI mode charging. Figure 5.4 shows the graph of hydro carbons verses load.

Performance of HCCI engine with Various Modes of Charging Operations

It shows that hydro carbons reduce with charging mode of Turbo charging. Figure 5.5 shows the graph of opacity verses load. It shows that opacity decreases with the charging mode of HCCI.

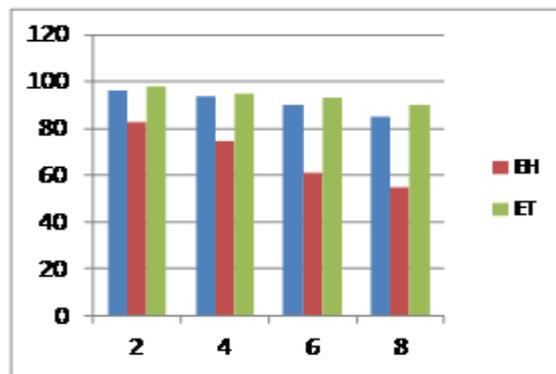


Fig.5.5: Load v/s Opacity.

VI. CONCLUSION

The different charging modes of operations conducted on 4 stroke Homogeneous Charged Compression Ignition (HCCI) technology engine. The following points are observed. The HCCI technology generates small amount of exhaust emissions and it improves the performance of the engine. And, also performance and released emissions depends on the quality and quantity of homogeneous mixture. The performance parameters fuel consumption reduces with the charging mode of Turbo charging, the brake thermal efficiency slight increases with the charging mode of Homogeneous Charged Compression Ignition (HCCI). The emissions parameters oxides of nitrogen reduce with the charging mode of HCCI only and unburned hydro carbons are reduces with the charging mode of Turbo charging. And, opacity or smoke emissions reduce with the HCCI mode of charging.

REFERENCES

1. Srinivasu Goteti G., and T Selvan, P.: HCCI Combustion in a Diesel engine using Oxygenated fuels and various operating parameters A Review, IJREER., 03, 2017, pp.1166-1173.
2. Kaiser, E.W., Yang, J., and culp, T.: Homogenous charged compression ignition engine-out emissions does flame propagation occur in homogeneous compression ignition, Int. J. of Engines Research., 03, 2016, pp. 184-295.
3. Ramana, P.V., Maheswar, D., and Uma Maheswar gowd, D.: Development of alternative fuels for HCCI engine technology, IJTER., 03, 2015, pp. 108-119.
4. Osbourne , R.J., Sapsford, Li., Lake, T.H., and Heikal, M.R.: Evaluation of HCCI for future gasoline power trains, SAE paper, 2003-01-0750.
5. Taro, Aoyama., Yoshiaki ,Hattori., Jun'ichi, Mizuta., and Yasuo, S.: An experimental study on premixed charge compression ignition gasoline engine, SAE paper, 1996, pp. 960-742.
6. Jeuland,N., Montagne,X., and Gautrot. X.:Potentiality of ethanol as a fuel for dedicated engine, In IFP international conference, 59,2007, pp. 559-570.
7. Joshi, S., Lave, L., Lester, M., and Lankey, R.: A life cycle comparison of alternative transportation fuels ,SAEpaper, 2000-01-1516.
8. Dhaliwal, B., Yi, N., and Checkel, D.: Emissions effects of alternative fuels in light-duty and heavy-duty vehicles, SAE paper, 2000-01-0692.
9. Lida, N.: Combustion analysis of methanol-fueled active thermo-atmosphere combustion – a new combustion process for internal combustion engines, SAE paper, 1994, 940-684.
10. Tiegang, H., Shenghua, L., Longbao, Z., and Chi, Z.: combustion and emission characteristics of a homogeneous charged compression

11. Mack, JH., Aceves, SM., and Dibble, RW.: Demonstrating direct use of wet ethanol in a homogeneous charged compression ignition engine, Energy, 85, 2006, pp.2622-3.
12. Pouloupoulos, SG., Samaras, DP., and Phillippopolous, J.: Regulated and unregulated emissions from an internal combustion engine operating on ethanol containing fuels, Atmos. Environ, 35, 2001, pp.4399-406.
13. Xing-cai, Lu., Yang, JG., Zhang, W., and Huang, Z.: Effect of cetane number improver on heat release rate and emissions of high speed diesel engine fueled with ethanol-diesel blend fuel, Fuel, 80, 2003, pp.2013-20.
14. Standing, R., Kalian, N., Ma, T., and Zhao, H.: Effects of injection timing and valve timings on CAI operation in a multi cylinder DI gasoline engine, SAE paper, 2005, 2005-01-0132.
15. Akagawa, H., Miyamoto, T., Harada, A., Sasaki, S., Shimazaki, N., Hashiue, T., and Tsujimura, K.: Approaches to solve problems of the premixed lean diesel combustion, SAE Paper, 1999-01-0183.
16. Alain, M., Xavier, Tauzia., and Jean-François, Hetet.: Experimental study of various effects of exhaust gas recirculation (EGR) on combustion and emissions of an automotive direct injection diesel engine, Energy, 33, 2008, pp.22-34.
17. Anthony, Dubreuil., Fabrice, Foucher., Christine Mounaim-Rousselle.,Guillaume Dayma., and Philippe, Dagaut.: HCCI combustion: Effect of NO in EGR, Proceedings of the combustion Institute, 31, 2007, pp.2879-2886.
18. Au, M.Y., Girard, J.W. and Robert Dibble.:1.9-Liter Four-Cylinder HCCI Engine peration with Exhaust Gas Recirculation, SAE paper, 2001-01-1894.
19. Dae Sik Kim., and Chang Sik Lee.: Improved emission characteristics of HCCI engine by various premixed fuels and cooled EGR, Fuel, 85, 2006, pp.695-704.
20. Alain, M., Xavier, Tauzia., and Jean-François, Hetet.: Experimental study of various effects of exhaust gas recirculation (EGR) on combustion and emissions of an automotive direct injection diesel engine, Energy, 33, 2008, pp.22-34.

AUTHORS PROFILE



Mr.A.Renuka Prasad presently Ph.D Research Scholar, Dept., of Mechanical Engineering Sangam University, Bhilwara. INDIA. He Published several research papers on HCCI engines. He is senior member in Indian Society of Mechanical Engineers.



Dr.Rakesh Bhandari Presently working as a Associate Professor and Head of Mechanical Engineering Department in Sangam University, Bhilwara, INDIA. He has several years of experience on teaching and published more research papers on different research areas.