

Development of Hierarchical Clustering Protocols for Wireless Sensor Networks

Malothu Amru, A. Bhavani Sankar

ABSTRACT: *Wireless Sensor Networks (WSN) has turned out to be raising field in research and significant part in the everyday universe of data computing. WSN are initially conveyed in military, overwhelming mechanical applications and, later reached out to the lighter applications, for example, shopper WSN applications. The primary objective of this paper is to diminish energy consumption in wireless sensor networks utilizing energy productive routing protocols (i.e., Modified HEED). To test the presentation of proposed routing protocols through simulations utilizing Network Simulator 2 (NS2.35) and to contrast and existing routing protocols dependent on performance metrics, for example, packet delivery ratio, throughput, energy consumption, overhead and start to finish delay.*

Keywords: *Network simulator, sensor, routing protocol.*

I. INTRODUCTION

WSN comprises of a massive amount of battery operated sensor nodes. Nodes in WSN are cooperate cooperatively to take detected data from the end sensor nodes to the Base station (BS). WSN gadgets (hubs) are battery worked; sparing force is the greatest test. The battery limit in the sensor hub is a noteworthy imperative of the miniaturization process which requires the execution and utilization of low power hardware. Additionally, the lifetime of the sensor hubs can be expanded by code optimization (calculation complexity), running operating system and applications to help the movement of the hub. With the confinements of battery control, computational and transmission ability of these sensor hubs, there is a prerequisite for coordination and aggregate data answering to the Base Station (BS).

Clustering in Wireless Sensor Networks

Clustering is the way toward segregating the sensor nodes into virtual groups. Every one cluster is regulated by a hub called as cluster-head (CH) and various nodes are inferred as member nodes. Clustered nodes don't communicate direct with the base station, yet they have to transmit the assembled data through the cluster-head. The CH attempts to total they got data, got from the cluster members and advances it to the BS. Along these lines, it limits the vitality utilization and various messages conferred to the base station. In like manner, the communications traffic in the network is reduced. The astonishing consequence of clustering the sensors in a network helps in broadening the period of the network. Clustering is the hierarchical procedure followed in a network, made to streamline the correspondence procedure of the network.

Revised Manuscript Received on January 15, 2020.

Mr. Malothu Amru, Pursuing Ph.D, Sri Satya Sai University of Technological & Medical Science, Bhopal, India.

Dr. A. Bhavani Sankar, Research Guide, Dept. of Electronics & Comm., Sri Satya Sai University of Technology & Medical Sciences, Bhopal, MP, India)

It prompts the nearness of a mind blowing number of undertaking explicit clustering protocols.

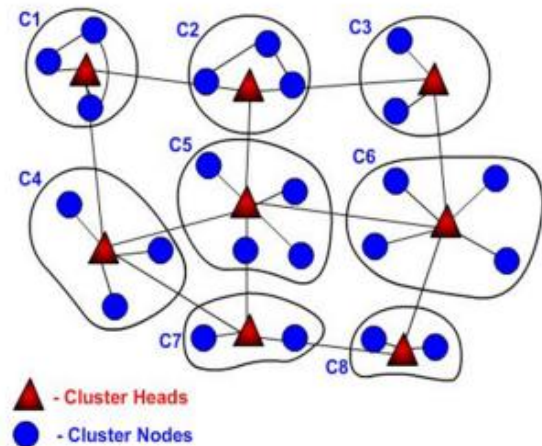


Figure 1: An example of clustering

In clustering as appeared in Figure 1, the nodes are separated into various clusters based on specific heuristics, where one cluster-head is available for each cluster. All member nodes transfer data to their separate cluster heads, with the cluster head reproducing the data aggregation and forwarding it to the base station. Because neighboring nodes in a group can detect similar data, the data accumulation method can delete the copy data in the headers of the group. This saves energy and reuses the bandwidth for consolidation over time. Moreover, clustering helps in settling the topology of the network and improves the versatility of the network.

The various elements present in a clustering procedure are:

Cluster members: These are the sensors sent in the application region, which aides in structure a clustered remote sensor network. They are fit for detecting the genuine data and transmitting them towards the base station.

Cluster Head: There exists a virtual pioneer in each cluster, which are designated as cluster-heads. In additional, it is responsible for particular activities done in the cluster, for instance, data aggregation, data scheduling and data transmission to the CH.

Base Station: The base station is the primary information accumulation center for the remote sensor organizes. This is considered as the scaffold between the system and the end client. The BS viewed as having no resource constraints like bandwidth, battery power and processing capability.

II. PROPOSED METHODOLOGY

In a square locale of $A \times A$ m², a lot of n sensor nodes are sent arbitrarily. The BS is situated on the left top side of the conveyed zone. When the sending of the sensor nodes is finished, they are thought to be stationary. In view of the RSS, the surmised separation between the nodes can be determined. The radio vitality dissemination model expect mistake free communication connections and utilizations both free space and multipath channel model referenced by Younis and Fahmy (2004). For the working of the transmitter and the collector hardware, the electronic vitality spends by the sensor hub is given by $E_{elec} = 50nJ/piece$. E_a , the vitality spent by the transmitter intensifier is reliant on the separation' between the sender and the beneficiary. for example $E_a = E_{fs}$ expecting a free space model when $d < d_0$ and $E_a = E_{mf}$ accepting a multipath model when $d \geq d_0$, where $d_0=75m$ is a consistent separation. $E_{fs} = 10pJ/piece/m^2$ and $E_{mf} = 0.0013pJ/bit/m^4$. In view of the above suspicions for the radio model, the vitality devoured for transmission E_{Tx} , for transmitting a k -size parcel over a separation (d), can be determined as:

$$E_{TX} = (E_{elec} \times K) + (E_a \times K \times d^n) \tag{1}$$

Where $n = 2$ for the free space model and $n = 4$ for the multipath model. The measure of vitality E_{Rx} spent to get a k -bit size message is:

$$E_{RX} = E_{elec} \times K \tag{2}$$

E_{Tx} and E_{Rx} is the transmitting energy and receiving energy in Joules.

Limitations

CHs which are close to the sink drains their vitality prior as they have a huge outstanding task at hand. Each round clustering process and the little iteration forces a lot of system overheads. This weight brings about striking vitality scattering prompting declining in the period of the system.

Description of Our Modified HEED Algorithm

The modified HEED calculation is focused on enhancing the network lifetime by decreasing the hotspot issue by unequal bunching. So adjusting of relay traffic and distributed grouping is the prime focus; thinking about the residual vitality of hub and the quantity of neighbor's hubs. It comprises of three phases; the commencement, principle processing, and finalization phase the initialization phase-introductory network arrangement and bunching and explicit sitting tight time for re-grouping

- The principle processing phase-unequal grouping and CH rotation dependent on request
- The finalization phase-grouping and information transmission

The initialization phase begins with the BS broadcasting a sign. All hubs compute their distance to the BS dependent on the RSS. Inside its communication run 'r', every hub transmits a message comprising of its ID and the residual vitality. The average residual vitality of the neighbor hubs is determined utilizing the recipe (Dhanpal et al. 2015);

$$E_{t\alpha} = \frac{1}{n} \times \sum_{j=1}^n E_{fr} \tag{3}$$

Where n means the all-out number of neighbor hubs and E_{jr} is the residual vitality of the neighbor hubs in Joules. A holding up time t_i in a flash (Dhanpal et al. 2015) is additionally set for broadcasting the bunch political decision message so that no two hubs will send this message simultaneously. So as to have this, an arbitrary incentive between $[0.9, 1]$ is doled out to V_r . The holding up time is determined as;

$$t_i = \begin{cases} \frac{E_{ia}}{E_{fr}} T_2 V_{rr} & E_{ir} \geq E_{ia} \\ T_2 V_{rr} & E_{ir} < E_{ia} \end{cases} \tag{4}$$

Where E_{ia} is the regular outstanding energy in Joules, E_{ir} is the residual energy of hub I in Joules, T_2 is the time span right away and is the arbitrary incentive between $[0.9, 1]$. The underlying strides of the Modified HEED are like HEED. The whole activity occurs in various rounds. Hubs will know about its residual energy, the energy level of neighbor hubs and the quantity of neighbor hubs. The Average Minimum Rechargability Power (AMRP) is determined. Each round will be started with the clustering system leading to clustering and later to information transmission through intra-bunch and between group components. After the underlying cycle, an irregular time of holding up time is presented as in condition (4) for starting the unequal clustering. In HEED each CH utilizes a similar challenge radius regardless of its distance from the BS which structures equivalent measured clusters which brings about hotspots leading to energy depletion of CHs for the most part neighboring to the BS. So as to stay away from this issue, the Modified HEED utilizes an unequal clustering technique characterized for clustering where the bunch radius (Dhanpal et al. 2015) is determined as;

$$R_{et} = [1 - \alpha \left(\frac{d_m - d_i}{d_{ma} - d_{mt}} \right) - \beta \left(\frac{E_t}{E_m} \right)] R_m \tag{5}$$

Where d_{ma} and d_{mi} are the minimum and maximum distance of the sensors from the base station, d_i is the SH distance to the BS, α is an arbitrary worth which has a place with $[0, 1]$, R_m is the maximum estimation of accessible challenge radius which is a pre-characterized esteem, β is a genuine irregular incentive in the interim $[0, 1]$ and E_i is the outstanding energy of the hub I . The challenge radius of a hub is subject to E_i and d_i ; the bigger the estimations of E_i and d_i , the bigger will be the challenge radius. For the simulation, R_m is taken as the slanting distance isolated by ten.

Every hub will have data about its energy level and the distance of it from the CH. In view of the message got from the CHs, the distance will be determined and the non-CH hubs will join the closest CH. The expectation is to continue a planned distance from the unexpected passing of the CHs close to the BS by decreasing the over-burden in them. Utilizing the previously mentioned group radius as in condition (5), the collections close to the BS will be little and clearly the CHs need to oversee less bunch individuals which spare the energy for information sending. The means in the modified HEED calculation are abridged beneath and the flowchart is spoken to in Figure 1.



Step1: Initially, CHs are built by the HEED calculation.

Stage 2: In the following phase re-clustering is done dependent on the challenge radius given in condition (5) in light of the holding up time given in condition (6).

Stage 3: Within a group, the CHs will be rotated dependent on the residual energy set to edge esteem.

Stage 4: If the CHs energy level goes past the edge esteem, re-clustering is performed; go to Step 2.

Stage 5: After CH choice and clustering is done, information is directed (intra-bunch and between group) to the base station.

III. RESULT

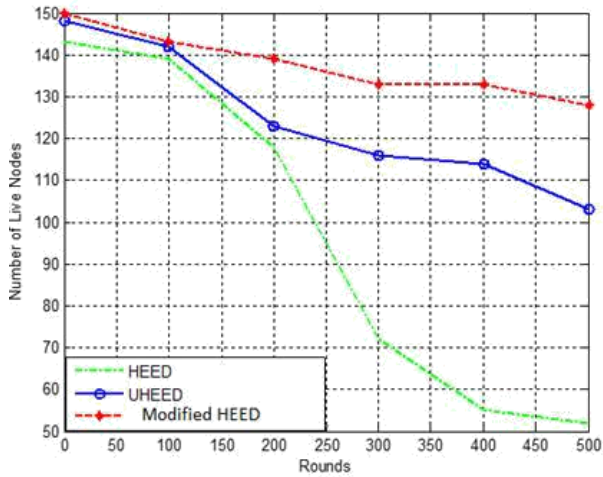


Figure 2: Number of Live Nodes Vs Rounds for Modified HEED (N=150, A=100m x 100m)

From the above figure, it is clear that the amount of quick nodes is more on account of Modified HEED compared to HEED and UHEED. On account of HEED, there is a drastic decrease in the amount of quick nodes as the simulation time increments in every one of the three situations. In UHEED there is a gradual depletion of nodes. Compared to these, the Modified HEED Algorithm holds the amount of quick nodes for a more extended span. The Modified HEED shows less postponement in packet conveyance in all cases. As the proportion of nodes builds a there is a lessening in the postponement in packet conveyance.

IV. CONCLUSION

The primary contrast among HEED and the Modified HEED is in the strategy for clustering. While HEED makes clusters of equivalent size, the Modified HEED utilizes the unequal clustering system, energy productive shifting size clustering calculation. U-HEED additionally utilizes an alternate finish radius for clustering in each round in order to have nonuniform group sizes. This methodology wipes out the sudden passing of the nodes close to the BS which will be consistently taking part in the information transmission to the base station. Modified HEED makes clusters of fluctuated sizes and ensures that the collections close to the base station are little compared to that of U-HEED. As the CHs in littler clusters require planning lesser group individuals, the energy of the CHs can be saved for sending the information. This, thus, decreases the heap on the CHs, keeps away from their energy depletion at a quicker rate and end to end these lines upgrades the lifetime of the network.

REFERENCES

1. Abirami, T, & Thangaraj, P 2013, 'Association Rules for Wireless Sensor Data Based On Fuzzy - Genetic Algorithm', Life Science Journal, vol. 10, no. 4s, pp. 554-558
2. Ahuja, R., A. B. Ahuja, P. Ahuja, "Performance evaluation and comparison of AODV and DSR routing protocols in MANETs under wormhole attack", in Image Information Processing (ICIIP), 2013 IEEE Second International Conference on, 2013, pp. 699-702.
3. Ali, M. S., Dey, T., and Biswas, R. "ALEACH: Advanced LEACH Routing Protocol for Wireless Microsensor Networks", In IEEE International Conference on Electrical and Computer Engineering, pp. 909-914, 2008.
4. Bai, F. E., Mou, H. H., and Sun, J. "Power-Efficient Zoning Clustering Algorithm for Wireless Sensor Networks", In IEEE International Conference on Information Engineering and Computer Science, pp. 1-4, 2009.
5. Chen, H., Mineno, H., and Mizuno, T. "A Meta-Data-Based Data Aggregation Scheme in Clustering Wireless Sensor Networks". In proceedings of the 7th international conference on Mobile Data Management, pp. 154-154, 2006.
6. Cheng, L., Qain, D. and Wu, W. "An Energy Efficient WeightClustering Algorithm in Wireless Sensor Networks", Japan-China Joint Workshop on Frontier of Computer Science and Technology, pp.30-35, 2008.
7. Govindasamy, J., S. Punniakody., "A Comparative Study of Reactive, Proactive and Hybrid Routing Protocol in Wireless Sensor Networks under Wormhole Attack", Journal of Electrical Systems and Information Technology, Vol. 22, pp. 167-172, 2017
8. Liu, Q., X. Wang, G. B. Giannakis, "A cross-layer scheduling algorithm with QoS support in wireless networks", IEEE Transactions on vehicular Technology, Vol. 55, pp. 839-847, 2006
9. Meghanathan, N. "Grid Block Energy Based Data Gathering Algorithm for Lower Energy*Delay and Longer Lifetime in Wireless Sensor Networks", Jackson State University, 2009.
10. Mao, Y., Li, X., Zhu, Y., and Liang, Y. "A Cluster-Based Data Gathering Protocol in Heterogeneous Wireless Sensor Networks", In IEEE International Conference on Computational Intelligence and Software Engineering, pp. 1-4, 2009.
11. Manjeshwar, A. and Agrawal, D.P. "TEEN: A Routing Protocol for Enhanced Efficiency in Wireless Sensor Networks", Proceedings of IEEE 2001, pp.2009-2015, 2001
12. Mendes, L. D. P., J. J. P. C. Rodrigues., "A survey on cross-layer solutions for Wireless Sensor Networks", Journal of Network and Computer Applications, Vol. 34, pp. 523-534, 2011
13. Prathibhavani, P. M., T. G. Basavaraju., "Energy Efficient Cross Layer Design Protocols using Distributed Method of information sharing in Wireless Sensor Networks-A review", International Journal of Computer Science and Electronics Engineering (IJCSSE), Vol. 3, pp.344-352, 2015.
14. Ranjan, R., S. Varma., "Challenges and implementation on Cross Layer Design for Wireless Sensor Networks", Wireless personal communications, Vol. 86, pp. 1037-1060, 2016.
15. Sahota, H., R. Kumar, A. Kamal, J. Huang, "An energy-efficient Wireless Sensor Networks for precision agriculture", in Computers and Communications (ISCC), 2010 IEEE Symposium, 2010, pp. 347-350
16. Saleem, M., I. Ullah, M. Farooq., "BeeSensor: An energy-efficient and scalable routing protocol for Wireless Sensor Networks", Information Sciences, Vol. 200, pp. 38-56, 2012.
17. S. Venkatraj, Rajiv Vincent, V. Vijayakumar, K. Vengatesan, and M. Rajesh, "Development of Test Automation Framework for REST API Testing", J. Comput. Theor. Nanosci. 16, 453-457 (2019). (Scopus)
18. K. Vengatesan, M. Kalaivanan, "Recommendation System Based on Statistical Analysis of Ranking From User" Information Communication and Embedded Systems (ICICES) 29 April 2013, pp. 479-484 ,(IEEE Explore).
19. Yu, Y., Li, X., and Chen, L. "The Application of Wireless Sensor Networking in Environmental Monitoring Based on LEACH Protocol", In IEEE International Conference on Web Information Systems and Mining (WISM), Vol. 2, pp. 35-38, 2010.
20. Zahmati, A. S., B. Abolhassani, A. A. B. Shirazi, A. S. Bakhtiari., "An energyefficient protocol with static clustering for Wireless Sensor Networks", International Journal of Electronics, Circuits and Systems, Vol.1, pp. 135-138, 2007.

AUTHORS PROFILE



Mr. Malothu Amru is currently Pursuing Ph.D in Sri Satya Sai University of Technological & Medical Science, Bhopal. He has completed his M. Tech in Electronic Design Technology (EDT) from National Institute of Technology (NIT), Calicut, with First Class.

Dr.A.Bhavani Sankar Research Guide, Dept. of Electronics & Comm., Sri Satya Sai University Of Technology & Medical Sciences, Bhopal, MP, India)