

Appraisal of Busy Traffic Intersections and Design of Coordinated Signal System



D. Swetha, B. Bhavani Shankar, B. Sai Naveen, G. Sahithi, N. Prabhanjan, G. Swamy Yadav

Abstract: Road intersections in series in urban areas lead to discord between opposing traffic flows and cause delays and accidents. To overcome these problems at intersections, the traffic flows across the intersections are controlled by using signals. The fixed timings and isolated operation of signals at each intersection along a street may cause delays on red duration and generate vehicular queue during peak hours. Proper timing and coordination of the signal timings with reference to intersection distance and the average travelling speed of vehicles can boost traffic handling capacity along the streets during busiest hours. This work has been conducted to assess the current operating system of traffic signals and investigate the benefits of these signals coordinated by using micro-simulation software PTV VISSIM. Initially, the VISSIM simulation was calibrated and the coordinated signals were run for execution based on the prepared model in VISSIM. The traffic flow delays and travel times obtained by the simulation were compared with the corresponding values before coordination. A considerable decrease in delays and travel times was noticed after coordinating the signals along the study street. It is also useful for similar traffic coordination studies elsewhere, subjected to the intervals of intersections and traffic flow characteristics are comparable.

Keywords: Delay, Signal coordination, Micro-simulation and VISSIM.

I. INTRODUCTION

Traffic signals can be considered as monitors of traffic flow for the particular area. Smooth traffic flow is to be expected on the pavements. Pavement strength and its characteristics are very important. Recent research has concluded many modern techniques to improve the strength of pavements from sub grade to surface using several admixtures (Shaik 2017, Ravindran 2016, Venkat Reddy 2018). The design of new

intersections is immensely important in developing areas. Especially in smart cities improvement of signalized intersections are important (Venkat Reddy 2017). Coordination of signalized intersection is one of the popular concepts in traffic flow management along a street. Signal coordination cites the interlinking of timings of the signals along the intersections in street so that a platoon of vehicles traveling on the street cross through the intersections without any inconvenience or stopping for series of green lights. The objective of signals coordination is to permit the greatest number of vehicles to pass through the intersections in sequence with few or no stops.

Traffic Signal Priority (TSP) is being adopted for more than three decades to reduce delays at intersection queues (Chang, 2002). The TSP can decrease transit delay and travel time for improving overall quality of the transit service.

As a common observation, inefficiency of any urban traffic system can be attributed to the delay encountered at signalized intersections. It was found that the delay of buses due to halting at signalized intersections comprises about 20% of overall transit delay (Zhang, 2001).

A mixed combination of cyclically time-expanded network and integer linear programming was formulated for simultaneously optimizing both coordination of signals and traffic assignment in an urban street network. This model can be used for evaluating extensive simulation experiments and establish as a traffic simulation model (Kohler and Strehler, 2010).

A study conducted along 12-intersection corridor on Glades Road in Boca Raton in USA to integrating VISSIM, SSAM, and VISGAOST tools for optimizing signal timings to reduce surrogate safety measures and subsequently reduce risks of potential road accidents. In addition to this study, a multiple-objective genetic algorithm was implemented with VISGAOST and identified the relationship between surrogate safety and traffic efficiency. It was found that, the optimized signal timings provided both safety and efficiency in traffic operations (Stevanovic et al, 2011).

Coensell and Botteldooren (2011) studies on the Dutch vehicle fleet investigated and studied the influence of traffic signal coordination on vehicle noise and air pollutant emissions by using a microscopic traffic simulation model coupled with emission models. It was found that the largest potential reduction occurs when traffic intensities are close to capacity and the green split is low.

Manuscript published on January 30, 2020.

* Correspondence Author

D. Swetha*, Assistant Professor, S R Engineering College, Warangal

B. Bhavani Shankar, PG Scholar, University College of Engineering, Osmania University, Hyderabad

B. Sai Naveen, PG Scholar, Chaitanya Bharathi Institute of Technology and Sciences

G. Sahithi, Assistant Professor, S R Engineering College, Warangal

N. Prabhanjan, Assistant Professor, S R Engineering College, Warangal

G. Swamy Yadav, Assistant Professor, S R Engineering College, Warangal

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an [open access](http://creativecommons.org/licenses/by-nc-nd/4.0/) article under the CC-BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>)

Appraisal of Busy Traffic Intersections and Design of Coordinated Signal System

This methodology can be used to determine the effects of a wide range of intelligent transportation systems which are integrated as coordinated signal system. Based on the probabilistic model, a practical signal timing guideline was developed according to the percentage of stops on non-coordinated arterials. This model was developed to precisely estimate the number of stops and has been validated through VISSIM simulation of observed traffic parameters along a signalized arterial in Nevada (NDOT, 2012). Retiming and coordination of traffic signals along a selected section of a road is one of the most cost-effective means to improve traffic flow, mitigate congestion and reduce air pollution, road-accidents and driver frustration. The ability to synchronize multiple intersections that are in series and thereby enhance operation of through and crossing traffic movements in a system is termed as traffic signal coordination (MnDOT, 2013).

are spaced apart by 300m and 600m from VST to Azamabad junction and Azamabad to RTC X Roads Respectively.

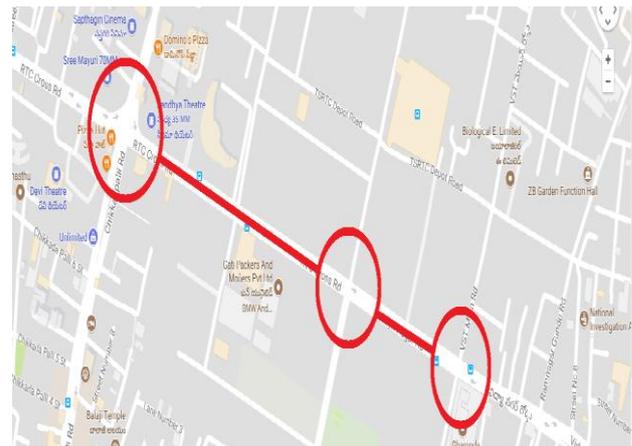


Fig.2 Google Map showing 3 Signal Junctions

II. METHODOLOGY

The steps involved and the methodology adopted to conduct this study is presented in Fig.1

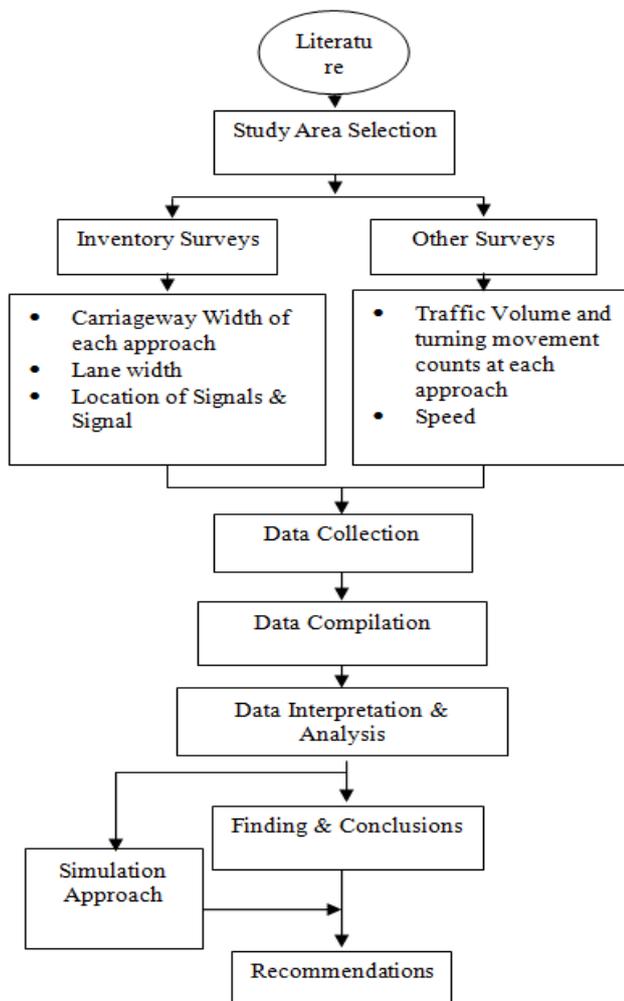


Fig.1 Methodology Flow Chart

III. THE STUDY AREA

The study area considered for this project is in Hyderabad city and the urban arterial street connecting of three signalized 4-legged intersections, RTC X-Roads, Azamabad Junction and VST Junction (Fig.2). These three signalized junctions

Data Collection

The data collections at these intersections include traffic volume studies, their turning movements and travel time studies. The traffic volume study was conducted by taking video footages from Cyberabad police Commissionerate, Hyderabad. Classified turning movement volume counts of vehicles of each of each junction are presented in Table 1, 2 and 3.

Table 1 Peak Hour flow rate at RTC X Road Signal junction

Approach	Movement	Peak hour flow rate (vehicle/hour)
Ashok Nagar	TH	818
	LT	228
	RT	670
Hindi Mahavidyalaya	TH	622
	LT	514
	RT	1126
Koti	TH	432
	LT	397
	RT	284
Secunderabad	TH	661
	LT	147
	RT	275

Table 2 Peak Hour flow rate at Azamabad Signal junction

Approach	Movement	Peak hour flow rate (vehicle/hour)
RTC X Road signal junction	TH	1400
	LT	274
	RT	313
Hindi Mahavidyalaya	TH	1619
	LT	294
	RT	436
TSRTC Depot road	TH	139
	LT	758

	RT	368
RTC Kalabhavan road	TH	117
	LT	193
	RT	336

Table 3 Peak Hour flow rate at VST Signal junction

Approach	Movement	Peak hour flow rate (vehicle/hour)
Azamabad Signal Junction	TH	1117
	LT	589
	RT	332
Hindi Mahavidyalaya	TH	1236
	LT	1683
	RT	235
Ramnagar	TH	81
	LT	367
	RT	141
Sri Vaishnavi Enclave road	TH	206
	LT	492
	RH	266

Travel Time survey

Travel times were measured in these routes by conducting moving car method. The details of the travel times and the details are presented below.

Direction of traffic flow	Trip 1	Trip 2	Trip 3
Azamabad signal junction to VST signal junction (300m)	1m 3sec	1m 2 sec	1m 7sec
RTC X Road signal to VST signal junction (900m)	1m 51sec	1m 56 sec	1m 54sec
Travel time from RTC X Road signal junction to VST signal junction (1200m)	2m 54sec	2m 58sec	3m 1sec
Average speed of travel from RTC X Road signal junction to VST signal junction (1200m)	18.6 2 km/hr	18.2 0 km/hr	17.9 0 km/hr

The Average speed from RTC X Road junction to VST signal junction is 18.54 Kmph.

Signal Timings

The current signal timings of the three junctions are given below, the green time of all 3 junctions and their four approaches are given. These timings must be cross checked with the proposed new design and should be optimized based on coordination principles.

Table 4 Existing Green times of 3 signal junction

Junction	Approach	Green time
RTC X Road Junction	North	30 seconds
	South	30 seconds
	East	20 seconds
	West	20 seconds
Azamabad signal junction	North	24 seconds
	South	22 seconds
	East	15 seconds
	West	15 seconds
VST signal Junction	North	22 seconds
	South	24 seconds
	East	20 seconds
	West	15 seconds

DATA ANALYSIS

For signal timing analysis, the traffic volume data and geometric data collected are summarized. The inputs considered and the Webster's method of optimum cycle length and the signal timing of the three intersections are presented below:

RTC X Road signal junction:

Junction leg	NORTH		SOUTH		EAST		WEST	
	H	T	H	T	H	T	H	T
Direction of traffic								
(PCU/hr)	47	46	16	53	88	89	42	84
Total (q) (PCU/hr)	993		1169		477		626	
Width (w)	7.75		8.5		6.53		9.46	
Saturation (s)	4069		4463		3428		4967	
y = (q/s)	0.244		0.262		0.139		0.126	

Azamabad signal junction:

Junction leg	NORTH		SOUTH		EAST		WEST	
	T	RT	TH	RT	T	RT	T	RT
Direction of traffic								
(PCU/hr)	936	209	1083	293	93	46	77	226
Total (q) (PCU/hr)	1145		1376		339		303	
Width (w)	8.58		9.67		7.05		5.6	
Saturation (s)	4505		5077		3701		2940	
y = (q/s)	0.254		0.271		0.091		0.103	

VST signal junction:

Junction leg	NORTH		SOUTH		EAST		WEST	
	T	R	T	R	T	R	T	R
Direction of traffic								
(PCU/hr)	742	220	821	156	53	141	136	176
Total (q) (PCU/hr)	962		977		194		312	
Width (w)	8.20		7.55		3.5		5.1	
Saturation (s)	4305		3964		1890		2380	
y = (q/s)	0.223		0.246		0.102		0.131	

Traffic signal coordination

After the above signal design, we must coordinate the stretch of 900m of inbound traffic from south to north by using VISSIM (Fig. 3). This simulation model was developed in Germany by PTV AG. It is a microscopic simulation model which can simulate different modes of vehicle operations along the streets.

This tool comprises of traffic simulator and signal state generator. VISSIM can also interface to traffic signal controllers type NEMA (ATAC, 2003).

Time space diagram: Coordination is necessary for the signal stretch taken. The average travel time in these junctions is taken as 31kmph. The cycle lengths for RTC X Road signal junction, Azamabad signal junction and VST signal junctions are 120 seconds, 103 seconds, and 98 seconds respectively. The green time for south leg is 33seconds, 31seconds and 26seconds. Distance between intersections is 300m and 600m from VST to Azamabad and Azamabad to RTC X Road respectively.

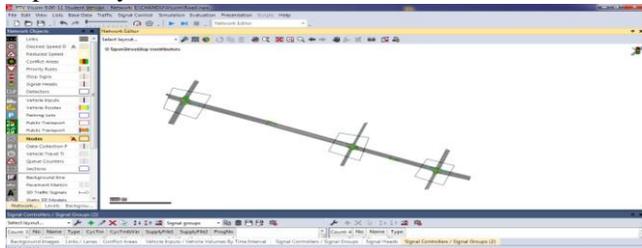


Fig. 3 Network diagram for the three signalized junctions

The green time is taken as bandwidth in signal coordination diagram by default and the corresponding red and amber times are indicated. The offset is determined as:

Offset for 300m = $300 / (31 * (1000/3600)) = 35$ seconds.

Offset for 900m = $900 / (31 * (1000/3600)) = 104$ seconds.

The time interval is taken as 20 seconds on x-axis

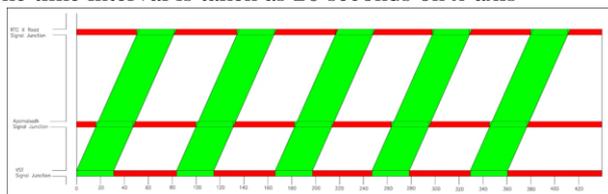


Figure 4 One-way coordination diagram for three signalized junctions

Presentation of One-way Coordination Diagram Presenting one-way coordination is simpler than two-way coordination. In the above diagram (Fig.5), the x-axis and y-axis is drawn taking x- axis as time interval of 20 seconds till 420 seconds and y-axis as distance between the intersections at 300m marking horizontal line parallel to x axis, and at 600m parallel to Azamabad signal junction. At VST signal junction, at 0 seconds the green time is started marking 26 seconds this is called as bandwidth. After 26 seconds is marked, the red time continues, followed by green time and so on. This bandwidth extends through next signal and till third signal; the through band meets from VST to Azamabad signal junction at offset of 35 seconds. And there the green time is marked of 31 seconds, followed by red time and so on...up to 3 to 4 cycles. And at third signal junction at 900m with offset of 104 seconds, the green time of 33 seconds is drawn followed by

red time and so on. The through band indicates the continuous movement of vehicles without any stopping.

- Since the cycle length and phases are not equal it will not align the through bands uniformly. Hence this must be adjusted such that it has at least are always in same position relative to each other.
- Since the offsets are different i.e. 0 at first junction, 35 seconds at 2nd junction and 104 seconds at 3rd junction, the signal turns green after some time after it turns green in the first junction. If the offsets have been same or zero, then all the signal would show green at same time.
- There are two ways in which coordination can be achieved, one of the ways is to stop the west bound traffic at certain intersection and allow the east bound traffic to flow without any stopping or allow for west bound traffic to flow but east bound traffic will have to be stopped at one intersection.
- Another method is to allow both the ways to travel without stopping by reducing the bandwidth and due to this the right turn flow must be stopped while the through flow continuous in both ways. Allowing both ways to travel reduces the bandwidth considerably.

IV. RESULTS

The following results are obtained from the above analysis

- From the above analysis from the data, the signals have a very less green time for the given traffic volume, the green time of VST signal junction should be increased from 22 seconds to 26 seconds.
- The green time of East leg of VST signal junction should be reduced from 20 seconds to 12 seconds, because the traffic flow is meager. This reduced 8 seconds should be added to North leg and South leg approaches.
- The green time from Azamabad signal junction from VST to RTC X Roads should be increased from 24 seconds to 31 seconds, reducing east leg approach from 15 seconds to 11 seconds.
- At RTC X Road signal junction, the green time from Azamabad signal junction to RTC X Roads should be increased from 30 seconds to 33 seconds, reducing east leg approach signal from 24 seconds to 19 seconds.
- At RTC X Roads signal junction, the green time of south leg approach should be increased from 30 to 35 seconds, reducing west approach signal from 22 seconds to 17 seconds
- The one-way signal coordination of the three signalized junctions is almost possible with progression speed of 31 kmph for the distance of 300m.

The bandwidths of each signal junctions are taken as 26 seconds at VST signal junction, 22 seconds at Azamabad signal junction, and 33 seconds at RTC X Roads signal junction, which are green times of respective intersection.

V. SUMMARY AND CONCLUSIONS

The summary of the current study and the conclusions drawn based on the data analysis are presented below:

Summary

The above study, data collection, analysis and results carried out are for three signalized junctions at one of the busiest vehicular traffic stretch at RTC X Road, VST signal junction, and Azamabad signal junction. These junctions have more traffic volume due to many commercial activities around it. The works carried out are measurement of geometric data of roads, traffic volume counts and travel time study. Since these are the main routes and inbound towards the city of Hyderabad and Secunderabad, HCV and multi axle vehicles are not allowed into these stretches. The types of vehicle considered for the study are two wheelers, three wheelers, cars and buses. All the parameters are calculated for peak hour traffic flow only. Signal design is carried out by Webster method, all the green times and towards north bound towards city should be changed to work more efficiently.

From the above study, the following summary can be drawn, the change in green times for all the three signal junctions is given below, some of the signal timings are changed or increased or decreased accordingly to give more priority to the major corridor

Table 4 Summary of green times of signals and the delay reductions

Intersection	Approach	Green time		Improvement (%)
		Before	After	
RTC X Road junction	North	30 seconds	33 seconds	10.00 %
	South	30 seconds	35 seconds	16.67%
	East	24 seconds	19 seconds	20.83%
	West	22 seconds	17 seconds	22.72%
Azamabad signal junction	North	24 seconds	31 seconds	29.16%
	South	22 seconds	33 seconds	50.00%
	East	15 seconds	11 seconds	26.66%
	West	15 seconds	13 seconds	13.33%
VST signal junction	North	22 seconds	26 seconds	18.18%
	South	24 seconds	29 seconds	20.83%
	East	20 seconds	12 seconds	40.00%
	West	15 seconds	15 seconds	0.00%

All the green times are increased accordingly, the above values after design improves the signal system efficiency. The traffic signal coordination is done by simple progressive system. The progression speed is taken as 31kmph. Therefore, all the vehicles should strictly limit the speed to 31kmph in order pass the green bandwidth. The distance between junctions is 300m and 600m Respectively; the offset is taken as 35 seconds from VST to Azamabad signal junction, and 104 seconds from Azamabad signal junction to RTC X Roads signal junction. The speed of traffic flow is also improved by 40%.

VI. CONCLUSIONS

The following conclusions can be drawn based on the present work.

- (a) Due to traffic signal coordination in this stretch, the speed of the vehicles should be increased by 40%
- (b) As the speed of vehicles in the stretch increases, the travel time can be reduced considerably due to coordination.
- (c) More delays are occurring at side legs of VST and Azamabad signal junction as the roads are very narrow.
- (d) The U turns should not be allowed in middle of the road, at it makes the group of vehicles to stop until the vehicle clears the road.
- (e) The coordination should be used only during peak hours, during non peak hours it is not useful as it makes other junctions wait which is not efficient during non peak hours.

REFERENCES

1. MnDOT (2013), "MnDOT Traffic Signal Timing and Coordination Manual", Minnesota Department of Transportation, May. 2013.
2. ATAC (2003), "Signal Coordination Strategies Final Report", Prepared by: Advanced Traffic Analysis Center Upper Great Plains Transportation Institute North Dakota State University Fargo, North Dakota, Prepared for: Grand Forks/East Grand Forks Metropolitan Planning Organization, June.
3. Deshpande V. (2003), "Evaluating the Impacts of Transit Signal Priority Strategies on Traffic Flow Characteristics: Case Study along U.S.1, Fairfax County, Virginia", Thesis submitted to the faculty of the Virginia Polytechnic Institute and State University.
4. Chang J. (2003), "Evaluation of Service Reliability Impacts of Traffic Signal Priority Strategies for Bus Transit", Dissertation, Virginia Polytechnic Institute and State University.
5. Coensell B. D. and Botteldooren D. (2011), "Traffic Signal Coordination: A measure to Reduce the Environmental Impact of Urban Road Traffic?", Inter-Noise, Sept., Osaka, Japan.
6. Kohler E. and Strehler M. (2010), "Traffic Signal Optimization Using Cyclically Expanded Networks", 10th Workshop on Algorithmic Approaches for Transportation Modelling, Optimization, and Systems (ATMOS '10). Editors: Thomas Erlebach, Marco Lübbecke; pp. 114-129.
7. NDOT (2012), "Signal Timing and Coordination Strategies Under Varying Traffic Demands", Report No. 236-11-803, Prepared by Rasool A. and Tian Z., Nevada Department of Transportation 1263 South Stewart Street Carson City, NV 89712.
8. Stevanovic A., Stevanovic J. and Kergaye C. (2011), "Optimizing Signal Timings To Improve Safety Of Signalized Arterials", Proc., of the 3rd International Conference on Road Safety and Simulation, September 14-16, Indianapolis, USA.
9. Zhang, Y.(2001), "An Evaluation of Transit Signal Priority and SCOOT Adaptive Signal Control", Master's thesis, Virginia Polytechnic Institute and State University.
10. Ravindran Gobinath, Isaac Ibukun Akinwumi, Olaniyi Diran Afolayan, Saravana Karthikeyan, Murugasamu Manojkumar, Sivaraj Gowtham, Ayyasamy Manikandan, Banana Fibre-Reinforcement of a Soil Stabilized with Sodium Silicate <https://doi.org/10.1007/s12633-019-00124-6>.
11. P.Venkatreddy, A Siva Krishna, G.S. Yadav, Experimental Investigation on Rcc by Using Multiple Admixtures, DOI:10.14419/ijet.v7i3.3.14472
12. Venkat Reddy P, Siva Krishna A; Ravi Kumar T; Study On Concept Of Smart City And Its Structural Components, International Journal of Civil Engineering and Technology (IJCIET) (Vol.8, No. 8) Publication Date: 2017-08-26
13. Shaik Khader Vali Baba, Sandela Haripriya, Performance Analysis Of Black Cotton Soil Treated With Granite Dust And Lime, International Journal of Civil Engineering and Technology.
14. Thahira Banu S, G. Chitra, R. Gobinath, P.O. Awoyera and E. Ashokkumar, Sustainable Structural Retrofitting Of Corroded Concrete Using Basalt Fibre Composte, Ecology, Environment and Conservation Paper