

# A Novel Method to Monitor Electricity Restoration in Orissa Affected by Cyclone Fani using Image Processing with VIIRS DNB Data

N. Srinivasa Rao, Sambasiva Rao Baragada, Nayana N, G. Geetha



**Abstract:** Due to advances in space technology, certain satellite sensors have unique power of capturing data and also generate special kind of observations. The Day and Night Visible Bands (DNB) of VIIRS Sensor mounted on Suomi NPP Satellite provide useful information in real-time monitoring of restoration of electrification after the trigger of a tropical cyclone. Since the destruction caused by a tropical cyclone is severe, therefore, both restoration and its monitoring play a vital role for law enforcement agencies. This paper presents a novel method to monitor electricity restoration spatially using image processing with VIIRS DNB data. The proposed method is experimented with the cyclone Fani hit Orissa coast during April-May 2019. To conclude, the work accurately determines the spatial analysis of electrification restoration after a tropical cyclone landfall is occurred

**Keywords:** Spatial Analysis, Electricity Restoration, Remote Sensing, Image processing, DNB VIIRS.

## I. INTRODUCTION

Modern satellite imaging systems in the most part record the electromagnetic radiation reflected from the Earth or emit a beam of microwave radiation and record its reflection from objects located on Earth. Some systems recording the satellite imaging are equipped with a more sensitive sensor and they record the light emitted from the surface of Earth. Night imaging provides accurate, cost-effective and straightforward method of the detection of populated areas and any other symptoms of human activity, as well as they allow tracking their changes over time. The accumulation of electricity lighting differs according to the geographical conditions and also majorly depends on the level of country development

which may constitute an additional starting point for further researches.

Visible Infrared Imaging Radiometer Suite (VIIRS) Day/Night Band (DNB) [1] possess the two specialties namely greater sensitivity and accurate latest onboard calibration. These two features results in getting best measurements even in low light conditions. This advantage leads to enhance, redesign and implement night time applications and thus can have a monitoring of several geographical parameters like snow, dust, fog, urban electricity, volcanic eruption etc. VIIRS DNB is quite superior to its previously commissioned sensors with an improved spatial resolution of 750m. The spatial analysis of the restoration of electrification process can be accomplished using satellite image processing with DNB channels of VIIRS sensor. The algorithm consists of measuring the brightness pixels temporally gives the exact direction of the proposed work. The method is tested and validated with the cyclone Fani hit Orissa coast during April-May 2019. To conclude, the work accurately determines the spatial analysis of electrification restoration after a tropical cyclone landfall is occurred.

## A. Visible Infrared Radiometer Suite (VIIRS) Day and Night Band (DNB)

VIIRS DNB captures earth's reflectance within a range of wavelength between 500 to 900nm. VIIRS DNB has the ability to capture certain environment data parameters like snow cover, fog, thick cloud, smoke, ash, during the presence of moonlight. Figure 1A depicts the data products which VIIRS DNB can sense during the presence of moon light. However, VIIRS can sense certain parameters like fire, city lightening, gas flares, eruption of lava, aurora, dim lights, fishing boats with or without presence of moonlight. Figure 1B depicts the parameters which can VIIRS can sense with or without moonlight. Figure 2 presents the reflectance image produced by VIIRS during night time.



Fig. 1. Reflections detected by VIIRS sensor

Manuscript received on February 10, 2020.

Revised Manuscript received on February 20, 2020.

Manuscript published on March 30, 2020.

\* Correspondence Author

N. Srinivasa Rao, Indian National Center for Ocean Information Services (INCOIS), Hyderabad, India. Email: [srinivasn@incois.gov.in](mailto:srinivasn@incois.gov.in)

Sambasiva Rao Baragada\*, Department of Computer Science, Government Degree College, Narayanguda, Hyderabad, India. Email: [shivaraob.s@gmail.com](mailto:shivaraob.s@gmail.com)

Nayana N, Department of Applied Mechanics and Hydraulics, National Institute of Technology, Karnataka. India Email: [nayanarayan627@gmail.com](mailto:nayanarayan627@gmail.com)

G. Geetha, Indian National Center for Ocean Information Services (INCOIS), Hyderabad, India. Email: [geetha@incois.gov.in](mailto:geetha@incois.gov.in)

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>)



**Fig. 2. Day-Night Band Image reflectance image produced by VIIRS during night time**

### B. Tropical Cyclone Fani

Fani is categorized as the severe tropical cyclone majorly effected to the state of Odisha. This cyclone originated in Indian Ocean on 26th April 2019, intensified rapidly and progressed towards the east coast of India. Fani created a massive destruction during its landfall on 3rd May 2019 resulting loss of US \$ 8.1 billion (Refer Figure 3).




**Fig. 3. Extremely Severe Cyclonic Storm Fani approaching India at peak intensity captured on May 2, 2019.**

## II. LITERATURE REPORTED WORKS USING VIIRS DNB DATA

Christopher Elvidge et al. [2] are the initial researchers who have brought the advantages of VIIRS DNB over its predecessors. Authors have opined that the DNB could be a great helpful to researchers working on land-use, ecology, country's economy and demography dynamics. Authors have revealed substantial inferences of future use of VIIRS DNB data. They have strongly pointed the prime advantage of DNB Band for generating radiance maps over a time-series pertaining to spatially monitor electric lighting over the areas

of urban human habitat. Deren Lia et al. [3] opined that the applications of nighttime remote sensing can be extended to several broad fields like estimating dynamics of urbanization, trigger of sudden events (eg: volcanic eruption), forest fires and gas flares etc. Such night remote sensing can also be used to observe man-made disasters like war explosions. In this paper, authors have listed various case studies involved in night time light applications. Light pollution is a major hurdle for sustainable habitation during nighttime. Gas flares, forest fires, sky glares, light clutters are some prominent factors results in light pollution. Nurbandi et al. [4] attempted to estimate the light pollution using VIIRS DNB data. Authors using VIIRS imagery experimented on Yogyakarta province and its surrounding areas namely Yogyakarta City, Depok Beach, and Gajah Mungkur reservoir to determine the light pollution applied over the Bortle Dark-Sky Scale with a value range of 1-9. The work has successfully proved to use VIIRS imagery in estimating light pollution. Wei Shi and Menghua Wang [5] presented three case studies to understand the dynamics ocean and its environment. Authors have presented an approach of assessing ocean diurnal dynamics using VIIRS DNB data. Authors carried their experiments to monitor algal bloom developed in La Plata River Estuary observed during 24th to 26th March 2016. They have also extended their work for a similar kind of experimentation in Hangzhou Bay region (China's east coast) during the period from 12th to 14th April 2017. Authors finally inferred that VIIRS DNB has beneficial scope of capturing ocean observations especially during the nighttime.

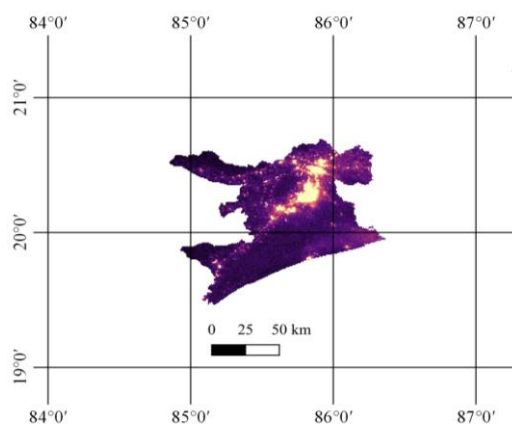

**Fig. 4. Study area comprised of Puri, Cuttack and Khordha districts in Orissa State**

## III. STUDY AREA

Cyclone Fani progressed with a speed of 200 kmph during its landfall on 3<sup>rd</sup> May 2019. The cyclone made a massive devastation resulting in washout of electricity for 3.5 million households. Puri, Cuttack and Khordhra districts of Odhisa state are the major areas affected by Cyclone Fani [7]. Figure 4 presents the study area of the proposed work which has been massively affected by the cyclone Fani.



#### IV. METHODOLOGY

Indian National Center for Ocean Information Services (INCOIS) captures real-time VIIRS data and made it public available through its website. The proposed work takes corrected reflectance imagery VIIRS DNB Netcdf (NC) data [6] from INCOIS website. Algorithm for the proposed work is as follows:

Step 1: Import the dataset.

Step 2: Extract the required DNB band data values onto a matrix grid.

Step 3: Count the number of grid locations which have greater than 0 reflectance values.

Step 4: Multiply the obtained count value with 750m resulting the spatial extent of city electric lightening.

Step 5: Repeat step 1 through step 4 for all the datasets captured over the period of study.

For instance, if the count value is 10 i.e. number of bright pixels are 10 then overall spatial extent comprised is of  $10 \times 750\text{m} = 7.5\text{Kms}$ .

The key idea behind is purely location specific. Since, the proposed work deals with the city limits therefore it is quite evident that the reflectance imagery is comprised of city lighting. A similar kind of analogy could be implied in identifying spatial extent of snow, gas flares, dust, forest fires etc depending on their geographical parameters and the trigger of recent events.

#### V. RESULTS AND DISCUSSION

Fani track has been plotted in figure 5 using the latitude and longitude details obtained from India Meteorological Department (IMD). Red dotted line in figure 5 depicts the exact tract of the cyclone Fani.



Fig. 5. Cyclone Fani Track

On 29th April 2019, the proposed work has estimated 241 bright pixels indicating 180.750Sq. Kms of spatial extent covered with regular city lighting. This observation deals with the pre-cyclonic status (Refer figure 6).

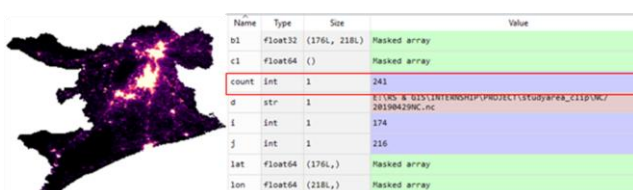


Fig. 6. Estimation of brightness pixels on 29<sup>th</sup> April 2019

Figure 7 illustrates a massive washout of electrical network over certain areas in Orissa and the proposed work estimated 44 bright pixels indicating 33 Kms of electrical lighting during 6th May 2019. The Government of Orissa has taken rapid initiation to restore electricity after Fani hit. Since, the process of electricity restoration is a time taking job, the proposed work gives the spatial extent improvement temporally.

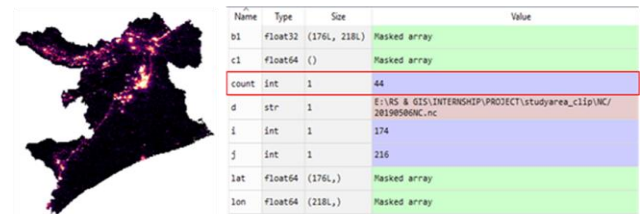


Fig. 7. Estimation of brightness pixels on 6th May 2019

On 9th of May 2019, the work estimated 85 pixels covering an area of 63.75Kms with an improvement of 30Kms electricity restoration. The overall change in electricity restoration from 29th April to 9th April is 64.73% (Refer figure 8).




Fig. 8. Estimation of brightness pixels on 9th May 2019

On 10th of May 2019, the work estimated 122 pixels covering an area of 91.5Kms with an improvement of 27.75Kms electricity restoration compared to its previous day. The overall change in electricity restoration from 29th April to 10th April is 49.377% (Refer figure 9).

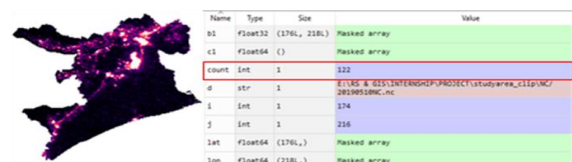



Fig. 9. Estimation of brightness pixels on 10th May 2019

On 14th of May 2019, the work estimated 157 pixels covering an area of 117.75Kms with an improvement of 26.25Kms electricity restoration compared to previous observation took on 10th May. The overall change in electricity restoration from 29th April to 14th April is 34.855% (Refer figure 10)




Fig. 10. Estimation of brightness pixels on 14th May 2019

On 24th of May 2019, the work estimated 186 pixels covering an area of 139.5Kms with an improvement of 21.75Kms electricity restoration compared to previous observation took on 14th May. The overall change in electricity restoration from 29th April to 24th April is 22.821% (Refer figure 11).

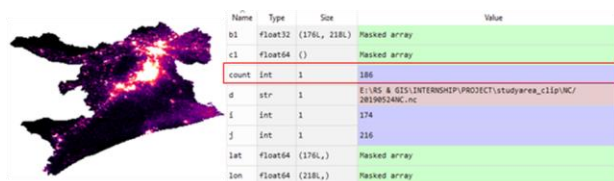

**Fig. 11. Estimation of brightness pixels on 24th May 2019**

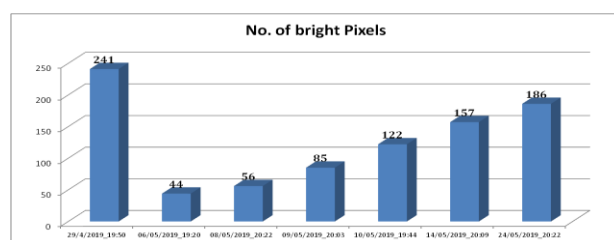

**Fig. 12. Day-wise Pixel Count**

Figure 12 presents the day-wise pixel count tabulation along with its time-series in a bar graph. The graph depicts monotonic improvement in electricity restoration after the cyclone Fani hit.

Table 1 presents the percentage of improvement between recorded observations on various days before and after cyclone Fani hit.

**Table- 1: Percentage of change or improvement in electricity restoration from 29th April to 24th May 2019**

Day	Percentage Change
29 <sup>th</sup> April to 6 <sup>th</sup> May	81.743
29 <sup>th</sup> April to 8 <sup>th</sup> May	76.763
29 <sup>th</sup> to 9 <sup>th</sup> May	64.73
29 <sup>th</sup> to 10 <sup>th</sup> May	49.377
29 <sup>th</sup> April to 14 <sup>th</sup> May	34.855
29 <sup>th</sup> April to 24 <sup>th</sup> May	22.821

## VI. CONCLUSION AND FUTURE SCOPE

The proposed work accurately determines the spatial extent of electrification restoration after a tropical cyclone landfall is occurred. The work could lead towards a promising direction using VIIRS DNB data combined with digital image processing. The present work can further be extended to spatially monitor volcanic eruption, forest fire, gas flares and other parameters obtained from night reflected imagery observations.

## ACKNOWLEDGMENT

This paper is a research contribution from INCOIS with internal contribution number-369. Authors would like to express their gratitude to the Head, OGG-INCOIS and the Director-INCOIS for their support in pursuing this research work.

## REFERENCES

1. Changyong Cao, Frank J. De Luccia, Xiaoxiong Xiong, Robert Wolfe, and Fuzhong Weng, "Early On-Orbit Performance of the Visible Infrared Imaging Radiometer Suite Onboard the Suomi National Polar-Orbiting Partnership (S-NPP) Satellite", IEEE Transactions on Geoscience and Remote Sensing, Vol. 52, No. 2, 2014.
2. Christopher D Elvidge, Kimberly Baugh, Mikhail Zhizhin, Feng Chi Hsu & Tilottama Ghosh, "VIIRS night-time lights", International Journal Of Remote Sensing, Vol. 38, NO. 21, 5860–5879, 2017.
3. Deren Lia, Xia Zhao and Xi Li, "Remote sensing of human beings – a perspective from nighttime light", International Journal of Remote Sensing, Vol.19, No.1, 69–79, 2017.
4. Wahyu Nurbandi, Febrina Ramadhani Yusuf, Ruwanda Prasetya, Mousafi Dimas Afrizal, "Using Visible Infrared Imaging Radiometer Suite (VIIRS) Imagery to identify and analyze light pollution", 2nd International Conference of Indonesian Society for Remote Sensing (ICOIRS), Vol 47, 2016.
5. Wei Shi and Menghua Wang, "Ocean Dynamics Observed by VIIRS Day/Night Band Satellite Observations ", Remote Sensing. Vol.10, No. 76, 2018.
6. <https://earthdata.nasa.gov/earth-observation-data/near-real-time/download-nrt-data/viirs-nrt#ed-corrected-reflectance>. (last accessed on 07.02.2020)
7. Kumar Hari, Gettleman Jeffery, Yasir Sameer, The Worst Over: A sigh of Relief in India, Mostly Spared by Cyclone, The New York Times. (last accessed on 07.02.2020)

## AUTHORS PROFILE



**Dr. N. Srinivasa Rao** presently associated as Scientist at Indian National Centre for Ocean Information Services (INCOIS), Ministry of Earth Sciences, Hyderabad. His areas of research include Oceanography and Remote Sensing.



**Dr. Sambasiva Rao Baragada** presently working as Assistant Professor of Computer Science at Government Degree College, Narayanguda, Hyderabad. His areas of research include artificial neural networks, image processing and computer security.



**Nayana Narayanan** presently pursuing her M.Tech Remote Sensing & GIS from the Department of Applied Mechanics and Hydraulics, National Institute of Technology (NIT), Karnataka. Her research areas are remote sensing and GIS systems.



**G. Geetha** presently associated as scientist at Indian National Centre for Ocean Information Services (INCOIS), Ministry of Earth Sciences, Hyderabad. Her areas of research include Mobile Computing and Remote Sensing.