

Heterogeneous Networks in 5g using Joint Path Selection and Rate Allocation Framework



B.Pavithra, Komala James

Abstract: - One of the major challenges in evolving wireless cellular networks whose return network is constrained by capability and heterogeneity (wired, wireless, and hybrid) is the design of distributed management mechanism. This study proposes a new method of managing wireless network interference with the ability to detect return network. The proposed approach helps Macro-cell User Equipment (MUE) to maximize its output using adjacent small cell base stations to maximize its uplink. Considering the radio access network and backhaul (possibly heterogeneous), this issue is represented as a non-cooperative game between MUE that attempts to maximize its compensation for delay levels. A new distributed learning algorithm is proposed to solve this problem, which uses the algorithm to autonomously choose the best uplink transmission strategy, provided a limited amount of available knowledge. The algorithm's convergence is demonstrated, and its output is studied. The simulation results show that, in comparison to the existing reference algorithm, The proposed approach has substantial efficiency benefits for various forms of backhaul in terms of average output and delay in MUE.

Keywords: Macrocell User Equipment (MUE), Small cell Base Station (SBS), Ultra Reliable Low Latency Communication (URLLC).

I.INTRODUCTION

The market for high-speed wireless connectivity is growing at a phenomenal pace, forcing operators to find new ways of enhancing network efficiency and strengthening next-generation wireless network protection. Recently, the implementation of small, low-cost, low-strength cells (which include femto cells and picocells) and relay nodes deployed in Current macro cellular networks has turned out to be a promising response to this rising demand for wireless transport. Femtocells offer a low-cost solution while attenuating RF interference, delivering QoS over IP backhaul, and preserving scalability [1]. The development of these small cell networks (also known as heterogeneous networks or HetNets) has drawn the attention of the study group. Femtocells are unlikely to be directly connected to the core network, and therefore only small backhaul signals are necessary for interference coordination [2]. It configures itself to reduce interaction with neighboring cells, this technology will help mitigate the effect of femtocell deployment within a macrocell network [3].

Macrocell – picocells cooperative scheduling scheme that mitigates both the DL and UL intercellular interference suffered by ER PUEs from the parasol macrocell as well as the adjacent picocells [4].

The fifth wireless network technology (5 G) is supposed to reach a few gigabits in line with second (Gbps) and have a large number of wirelessly linked devices. Ultra-dense SCs efficiently growth network ability and coverage, with the superior full duplex (FD) expected to double the spectral efficiency and reduce latency. In addition to an unparalleled rise in records and system traffic, low latency and high reliability are other crucial problems in 5 G networks and in various areas. The authors find problems with joint programming and congestion management in a heterogeneous multi-hop network using the NUM paradigm, where the suggested solution is tested under 3 interference models (i.e. graphic-based interference) [5]. Real interference, loose interference (IF) and more extreme interference. It also suggests that the IF model can offer a completely strict upper restrict for the real assessment of the system in heterogeneous cellular networks, provided that the great performance is guaranteed. However, focusing simplest on maximizing network capability and single path transmission, adjusted latency and dependable constraints and dynamic direction diversity need to be studied. Furthermore, the authors model a wireless multi-hop return scheme with a put off guarantee in which a link activation scheme is suggested to prevent interruption and restrict latency [5]. For multi-course networks, it is considered a speed assignment hassle that minimizes the distortion of application / end-to-cease layer video this is tormented by provider nice constraints (postpone, return). However, with the aid of maximizing community overall performance (potential, strength performance and spectrum efficiency), other essential aspects of 5G networks are regularly overlooked, inclusive of low latency and high reliability.

A common cache content at base stations was seen as an effective approach to relieving the backhaul load and improving service quality [6]. In [7] the joint user agreement and distribution of resources to optimize the usefulness for large MIMO-enabled HetNets with backhaul power constraints. From [8] a Small Cell Network (SCN) multi-hop mobile network that can enable cellular connections to local nodes via direct ties to small cell base stations. If macro and femto BSs communicate concurrently in the downlink, the users offloaded to Femto base stations may be seriously interfered by the macro BSs. This can be done with careful coordination of the transmitting time [9]. In [10] the interface interaction problem is solved by the process of decomposition and demonstrates convergence of the distributed algorithm suggested.

Manuscript received on April 02, 2020.

Revised Manuscript received on April 15, 2020.

Manuscript published on May 30, 2020.

* Correspondence Author

Miss Pavithra. B, Student, M.E in Communication Systems from SRM Valliammai Engineering College, Chennai, India.

Dr. Komala James, Professor & Head of the Dept of ECE at SRM Valliammai Engineering College.

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an [open access](http://creativecommons.org/licenses/by-nc-nd/4.0/) article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>)

Main Contribution of This Paper

The foremost contribution of this look at is to recommend a new self-prepared interference control strategy for Wi-Fi SCN, and not to ignore the borders because of the heterogeneous backhaul that occurs. Here, the small cellular forwards uplink traffic from the macro cellular consumer equipment (MUE) to the MBS as an "assist relay" by way of deciphering and via a heterogeneous return network. In the proposed approach, the MUE divides wisely its uplink traffic in parts: (i) Dense messages that can be quickly decoded inside the MBS and (ii) Transmissions using the MUE and the adjacent small cell base stations (SBS) and the correct messages for decoding the MBS. Using the suggested solution, the MUE is self-organizing and indirectly executing its transmission plan in a fully distributed manner, thus leveraging its utility function to grab the balance between fees and latency [5]. Simulation results demonstrate that MUE can retain overall output reliability and latency as compared to many reference interference control algorithms, at the same time as significantly improving overall community performance, thus optimizing MUE. With the deployment of picocells, the macro down-tilt may be relaxed further improving overall performance [12].

II.METHODOLOGY

Small Antenna Array System:

The advantage of making use of the gaining knowledge of route algorithm is to pick a high-overall performance and less congested route that outcome in decrease latency.

Large Antenna Array System:

Our suggested series of rules is tested in LOS and blocked channel systems, which using the LOS interaction paradigm in all baselines. Curiously, due to a higher antenna all obtained schemes do not now breach the latency limitation, with a 10 ms upper limit and an objective 5 per cent probability. However, baseline 3 does no longer rent two essential functions (ii) learning dynamic direction selection and (iii) assigning the URLLC perception price, so the distribution of baseline 3 is greater long.

Convergence Characteristics:

The set of rules converges faster, but lacks exploration capability. MBS does not take a look at other routes, which can take advantage of the range of routes. The advantage of exploration is to exploit the range of routes to improve overall performance, that is, low latency and reduce congestion in BS.

Learning temperature impact:

In addition to the previous analyses on the effect on integration of the compensation parameters, we also report the case of the common delay of a unmarried bounce and the use of huge MIMO communication techniques and millimeter waves to in addition improve the learning compensations of DL transmission.

III.MODULE DESCRIPTION

Wireless Backhaul In-Band:

We differentiate between essential wireless backhaul types: in-band backhaul (where the backhaul network and

all subscribers share all they need to provide bandwidth) and out-of-band backhaul (where backhaul is assigned a separate additional bandwidth band). Greater coverage of out-of-band frequency bands in high-capacity backhaul offers convenience. However, because of constraints such as price and quality of bandwidth, operators could not necessarily grant out-of-band bandwidth. In the opposite, as long as a stepped forward operation is guaranteed [11], the band return network will be fully combined with current services. Hence our attention is on the in-band wireless backhaul.

Delay Over-the-air (OTA) backhaul formulation:

The suggested solution consists of three exemplary hyperlinks with the aid of MUE m: direct correspondence between MUE and MBS, MUE-SBS relay contact and SBS-MBS return hyperlink. And we have exceptional expressions of delay for the connections above.

Imperfect information:

Here, the MUE does not provide information on the behavior of multiple MUEs on the network, i.e. there can be no alternation of data between all MUE, MBS and SBS [5]. MUE cannot replace it because of lack of informationMix techniques by way of calculating your regrets. To triumph over this problem, we endorse a distributed getting to know mechanism wherein the MUE coordinates its transmissions implicitly without records.Exchange This coordination system is based totally on the comments of the unmarried MUE fee sent by means of the MBS and / or SBS. In particular, at every moment, the MUE will pick its own actions, receive feedback and set up an opportunity distribution function in its transmission strategy

Offloading Method with Perfect Information:

Compared to the classic implementation, the download technique (OF-F) with perfect facts reaches almost double the fee, and the proposed approach can be increased by way of an additional 10%. As the amount of MUE increases, the typical MUE rate may be seen for the 4 cases to decrease. The explanation for this is because the common spectrum has a fixed range of sub-numbers. Operators experience extra interference due to the increase within the MUE volume. Further distortion increases the signal-to-noise ratio and noise level, resulting in average efficiency reductions for all MUEs.

IV.RESULTS AND DISCUSSION

A large matrix antenna is used in the configuration of the proposed network, and hybrid beam structure is used to have a bandwidth of Gbps information in the mm-Wave band. In addition, we imposed a chance delay to make sure that the URLLC has a high data fee. To this end, limited latency limitations and community balance throw the research problem to most community utility (NUM).

The key explanation for this is that the opportunity for return is a realistic limiting factor. A innovative mechanism for quantifying overhead signaling for inter-cell communication, which is commonly overlooked in conventional 1-tier networks, and takes on much greater significance in multi-tier heterogeneous cellular networks (HCNs)[13].



Given the fact that there is a wonderful wireless connection between the customer and the SBS, the client would not be able to reap the highest expected charge, without an excellent return contact. Nonetheless, the stability of the go back link between SBS and MBS is critical for the most effective small-cell network implementation. Such networks need architecture to bear in mind that all entry and return connections are right. Uplink channel conflict control strategies[14] are accomplished. Using the proposed method, MUE can self-arrange and implicitly coordinate the transmit policies in a completely distributed manner at the same time as optimizing their utility functions to capture the stability between fee and latency. The interference management mechanisms such as convergence duration and throughput are considered [15]. The simulation results display that MUE can stability performance and latency in comparison to many reference interference control algorithms, at the same time as significantly improving overall network performance, thus optimizing MUE.

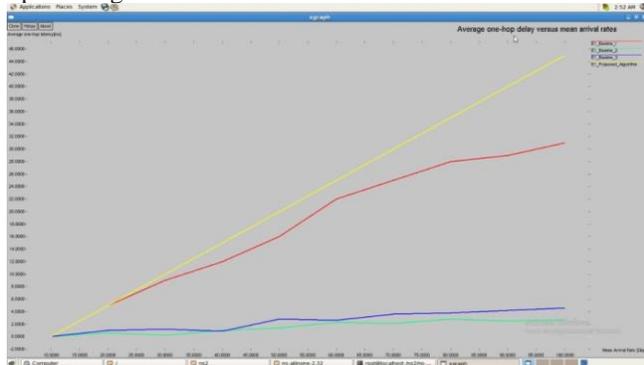


Fig 5.1 Common One hop delay versus mean rate of appearance

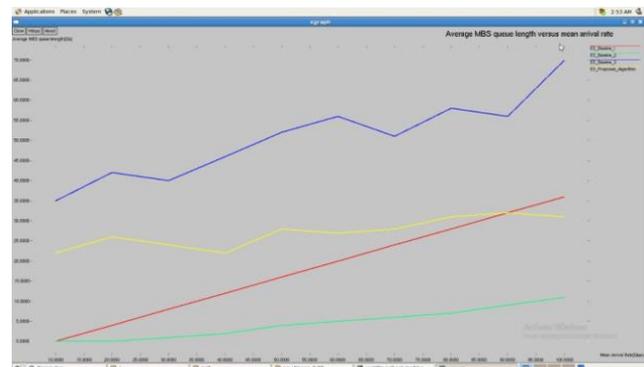


Fig 5.2 Standard length of the MBS line versus mean appearance rate



Fig 5.3 Small antenna array CCDF One hop latency

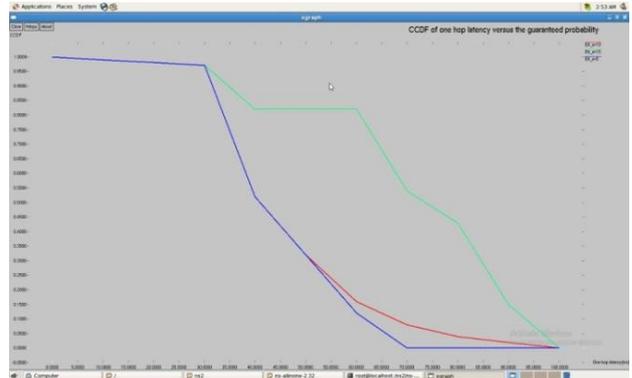


Fig 5.4 One hop latency CCDF vs guaranteed likelihood

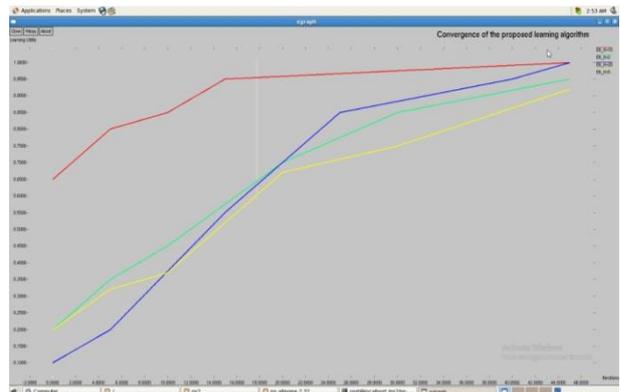


Fig 5.5 Assembly of learning estimation suggested

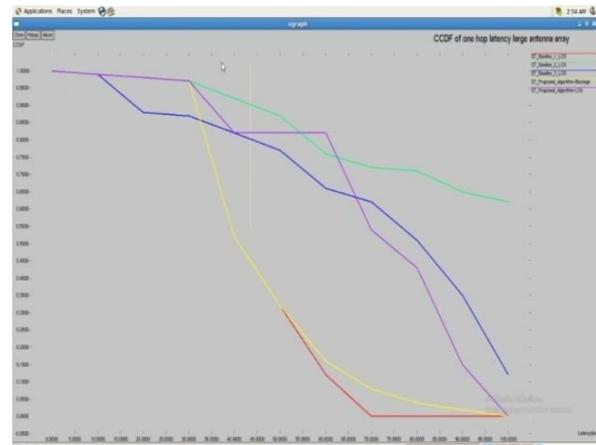


Fig 5.6 Large antenna array CCDF with one hop latency

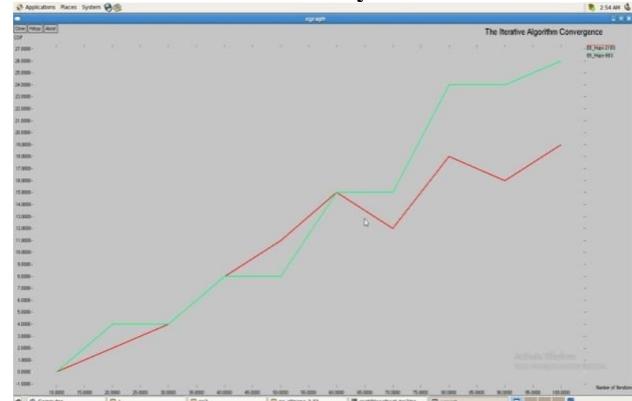


Fig 5.7 The Algorithm for Iterative convergence

V.CONCLUSION

In this study we are proposing a new distributed reinforcement learning method that enables macro cellular users to improve their output using neighboring small cell base stations. In the proposed solution, the small cell base station serves as a gateway for the macro cell subscriber and transfers MUE traffic across a backhaul network with restricted and heterogeneous bandwidth (wired, wireless). The suggested scheme helps users of macro cells to combine the entry and return connections together. We define the problem as a non-cooperative game and propose a novel and fully distributed learning algorithm that has been shown to converge to a suitable solution for balance. The simulation results show that compared to some reference methods already in use, our proposed algorithm can cause MUE to increase its data rate and significantly reduce its transmission delay. In future work, we will study the effects of downlink communications with backhaul recognition and carrier and multi-antenna aggregation in resource management with backhaul recognition. In this article, the author proposes multi-hop multipath programming that supports reliable communication by combining probabilistic delay restrictions and traffic division techniques in a 5G heterogeneous network. In particular, the problem is modeled as maximizing the utility of the network, which is subject to limited latency and has reliable probabilities and network stability.

REFERENCES

1. Chandrasekhar, J. G. Andrews and A. Gatherer, "Femtocell networks: a survey," in IEEE Communications Magazine, vol. 46, no. 9, pp. 59-67, September 2008.
2. T. Q. S. Quek, G. de la Roche, I. Guvenc, and M. Kountouris, "Femtocell Networks: Deployment, PHY Techniques, and Resource Management," Cambridge University Press, 2013.
3. D. Lopez-Perez, A. Valcarce, G. de la Roche and J. Zhang, "OFDMA femtocells: A roadmap on interference avoidance," in IEEE Communications Magazine, vol. 47, no. 9, pp. 41-48, September 2009.
4. D. Lopez-Perez, X. Chu and I. Guvenc, "On the Expanded Region of Picocells in Heterogeneous Networks," in IEEE Journal of Selected Topics in Signal Processing, vol. 6, no. 3, pp. 281-294, June 2012.
5. TrungKien Vu, Mehdi Bennis, MerouaneDebbah, MattiLatva-Aho. "Joint Path Selection and Rate Allocation Framework for 5G Self-Backhauled mm-wave Networks", IEEE Transactions on Wireless Communications, 2019.
6. J. Ji, K. Zhu, R. Wang, B. Chen and C. Dai, "Energy Efficient Caching in Backhaul-Aware Ultra-Dense Cellular Networks," 2018 IEEE International Conference on Internet of Things (iThings) and IEEE Green Computing and Communications (GreenCom) and IEEE Cyber, Physical and Social Computing (CPSCom) and IEEE Smart Data (SmartData), Halifax, NS, Canada, 2018, pp. 381-388.
7. H. Ma, H. Zhang, X. Wang and J. Cheng, "Backhaul-Aware User Association and Resource Allocation for Massive MIMO-Enabled HetNets," in IEEE Communications Letters, vol. 21, no. 12, pp. 2710-2713, Dec. 2017.
8. A. S. W. Marzuki, I. Ahmad, D. Habibi and Q. V. Phung, "Resource Management in Multi-Hop Mobile Small Cell Networks," GLOBECOM 2017 - 2017 IEEE Global Communications Conference, Singapore, 2017, pp. 1-7.
9. P. Kong and G. K. Karagiannidis, "Backhaul-Aware Joint Traffic Offloading and Time Fraction Allocation for 5G HetNets," in IEEE Transactions on Vehicular Technology, vol. 65, no. 11, pp. 9224-9235, Nov. 2016.
10. Q. Han, B. Yang, G. Miao, C. Chen, X. Wang and X. Guan, "Backhaul-Aware User Association and Resource Allocation for Energy-Constrained HetNets," in IEEE Transactions on Vehicular Technology, vol. 66, no. 1, pp. 580-593, Jan. 2017.
11. S. Samarakoon, M. Bennis, W. Saad and M. Latva-aho, "Backhaul-Aware Interference Management in the Uplink of Wireless Small Cell

- Networks," in IEEE Transactions on Wireless Communications, vol. 12, no. 11, pp. 5813-5825, November 2013.
12. A. Ghosh et al., "Heterogeneous cellular networks: From theory to practice," in IEEE Communications Magazine, vol. 50, no. 6, pp. 54-64, June 2012.
13. P. Xia, H. Jo and J. G. Andrews, "Fundamentals of Inter-Cell Overhead Signaling in Heterogeneous Cellular Networks," in IEEE Journal of Selected Topics in Signal Processing, vol. 6, no. 3, pp. 257-269, June 2012.
14. O. Simeone, E. Erkip and S. ShamaiShitz, "Robust Transmission and Interference Management For Femtocells with Unreliable Network Access," in IEEE Journal on Selected Areas in Communications, vol. 28, no. 9, pp. 1469-1478, December 2010.
15. V. Capdevielle, A. Feki and E. Sorsy, "Joint interference management and handover optimization in LTE small cells network," 2012 IEEE International Conference on Communications (ICC), Ottawa, ON, 2012, pp. 6769-6773.

AUTHOR PROFILE



Miss Pavithra. B pursuing her M.E in Communication Systems from SRM Valliammai Engineering College, Chennai, India. She completed B.E (Electronics and Communication Engineering) in Sudharsan Engineering College, Sathyamangalam, Pudukkottai, India. Her area of interest is Optical Communication, Telecommunication Technology.
Email: kbpavithra1995@gmail.com.



Dr. Komala James is PROFESSOR & HEAD of the Dept of ECE at SRM Valliammai Engineering College. She has done her B.E in ECE, M.E in Applied Electronics and PhD in "Mobility issues in Fourth Generation Wireless Networks". She is a FELLOW of IETE, LIFE MEMBER of ISTE & CSI. Her areas of interest are Heterogeneous Networks, 4G & 5G Networks, Wireless Communication.
Email: komalj.ece@valliammai.co.in.

