

Role of Position of Shear Wall in Reducing Torsion & Storey Displacement in an Irregular Building



Rishabh Srivastava, Rajiv Banerjee

Abstract- The paper elaborates the study of effects of location of shear wall in an irregular shaped building. The main concerned issue is the generation of torsion in a building which is irregular in plan. The paper points out the causes, effects and solution of the torsional forces in an irregular shaped building. The study is done on an 'L' shaped building which G+10 storied and is located in Seismic Zone IV exhibiting medium soil conditions and a damping of 5%. The modelling and analysis will be performed by using CSI ETABS ver.16. Dynamic Analysis is conducted in order to study the topic. The paper will finally point out the reasons for choosing a particular test model which exhibits lowest torsion and storey displacement.

Keyword: Centre of Rigidity, Centre of Mass, Nepal Earthquake 2015, Time History Data, Response Spectrum Data.

I. INTRODUCTION

Multistorey Buildings have become a necessity rather than an infrastructure icon for urban area in present time. The obvious reason for this is rapid increase in population and lack of available land for development in the city. Because of such high demand of the high rise building, the most important point to be considered is the safety of the building. As it is well known that the high rise structures are subjected to risk regarding lateral forces. Any numbers of examples from the past can be quoted which states that, how much damaging can these risks are. Clause 7.1 of IS 1893:2016 (Part -1) clearly identifies the buildings under various categories such as regular, irregular etc. Since we are concerned with torsion in building, it is important to note that the torsional forces are dominant in irregular building. The main reason for this is as follows –The building structure consists of two major points which are *Centre of Mass* and *Centre of Rigidity*. On one hand, centre of mass represents the point where the whole mass of the building is assumed to be concentrated and on the other hand centre of rigidity is the point at which the storey shear will act causing only displacement and not torsion when subjected to seismic forces. In a regular shaped building these points naturally coincides at one another. Unlike the regular shaped buildings, in irregular shaped buildings, the centre of mass and centre of rigidity get separated by certain eccentricity. This can be easily seen in Fig. 1.1. The more is the eccentricity, the more severe is the torsion forces due to lateral disturbances.

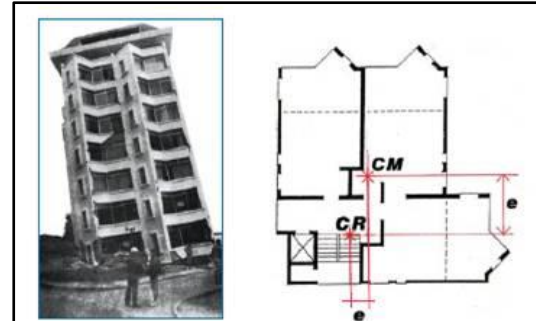


Fig. 1.1 Damage in a structure due to torsion
(Source: www.taxonomy.openquake.org)

Thus one has to control the centre of rigidity in order to control the torsional forces in a building. Here comes the role of shear wall.

II. ROLE OF SHEAR WALL

Shear Walls are the planer structural elements which impart lateral stiffness or rigidity to the structure. With the introduction of lateral stiffness, shear wall in a building causes a reduction in lateral displacement. But the merit of shear wall lies in its position.



Fig. 2.1 Shear Wall

(Source: www.constructionworld.com)

From the point of stability, one must place the shear wall in building in such position which in turn does not cause eccentricity between centre of mass and centre of stiffness. This is the reason for development of torsion forces in the building. In a nutshell, shear wall is a boon for structures only if it does not impart torsion in the building.

III. STUDY OF THE TOPIC IN TEST MODELS

For studying the role of shear wall in a reducing the torsion force and lateral displacement in an irregular building, a bare frame model along with five other test models are considered.

Manuscript received on April 02, 2020.

Revised Manuscript received on April 15, 2020.

Manuscript published on May 30, 2020.

* Correspondence Author

Rishabh Srivastava, Student, Department of Structural Engineering, Integral University, Lucknow, India.

Rajiv Banerjee, Associate Professor, Department of Structural Engineering, Integral University, Lucknow, India.

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an [open access](https://creativecommons.org/licenses/by-nc-nd/4.0/) article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>)

Role of Position of Shear Wall in Reducing Torsion & Storey Displacement in an Irregular Building

The test models are used for dynamic analysis for the following cases–

- 1. Response Spectrum Analysis** – As per the Indian Standard, Clause 7.7.5 of IS 1893:2016 (Part-1) using Fig. 2 regarding acceleration coefficient curve at 5% damping and medium stiff soil.

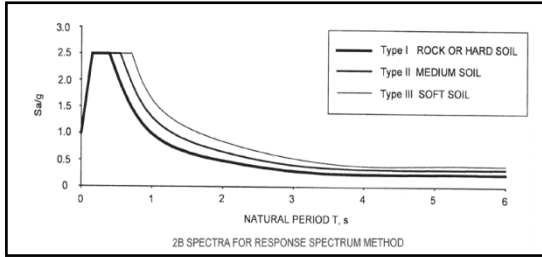


Fig. 2.2 Source- Fig. 2 of IS 1893:2016 (Part-1)

- 2. Time History Analysis** – As per the data of earthquake in Kathmandu, Nepal in 2015.




Fig. 2.3 Time History Data of Nepal Earthquake (Source- [2])

IV. GEOMETRICAL DETAILS OF THE TEST MODELS

TABLE 4.1

Sr. No.	PARTICULARS	DETAILS
01	Beam Details	300 x 450 (in mm)
02	Column Details	300 x 700 (in mm)
03	Thickness of Shear Wall	230 mm
04	Depth of Foundation	2.6 m
05	Floor to Floor Height	3 m
05	Storeys	G+10
06	Maximum No. Of Shear Wall Panels	25

V. LOADING DETAILS

The loading of the test models is kept similar for the sake of simplicity in comparative study.

TABLE 5.1

Sr. No.	PARTICULARS	DETAILS
01	DEAD LOAD <ul style="list-style-type: none"> Wall Load Floor Load Parapet Load 	6.9 kN/m 2 kN/m ² 3.5 kN/m
02	LIVE LOAD <ul style="list-style-type: none"> Floor Load Terrace Load 	3 kN/m ² 1 kN/m ²
03	SEISMIC LOAD <ul style="list-style-type: none"> For Response Spectrum 	Auto-generated as per IS 1893:2002 for Response Spectrum

	<ul style="list-style-type: none"> For Time History Analysis 	and as per Time History data of Nepal Earthquake for Time History Analysis in CSI- ETABS ver. 16
--	---	--

VI. MODEL LAYOUT

The red lines in the models denote the position of shear wall in the structure.

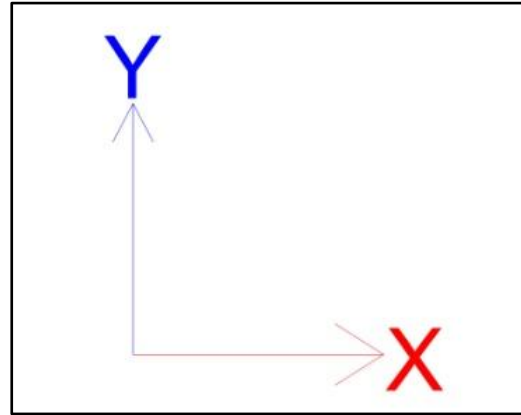


Fig. 6.1 Assumed Direction

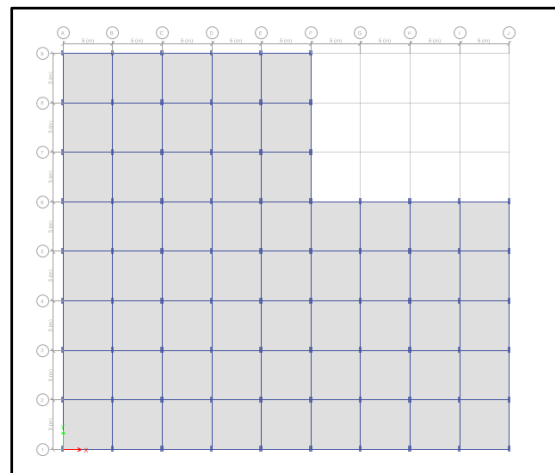


Fig. 6.2 BARE FRAME 'L' SHAPED

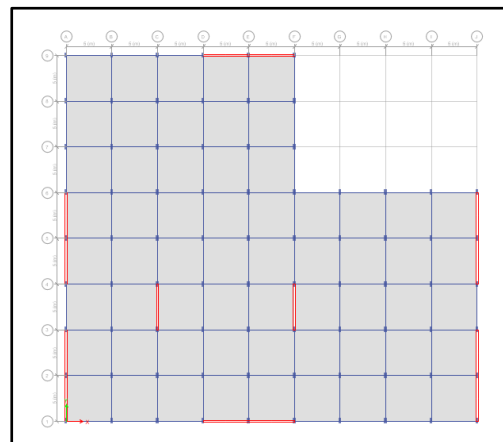


Fig. 6.3 MODEL 01 'L' SHAPED

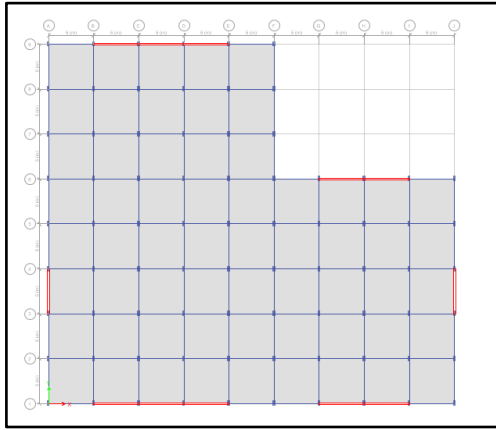


Fig. 6.4 MODEL 02 'L' SHAPED

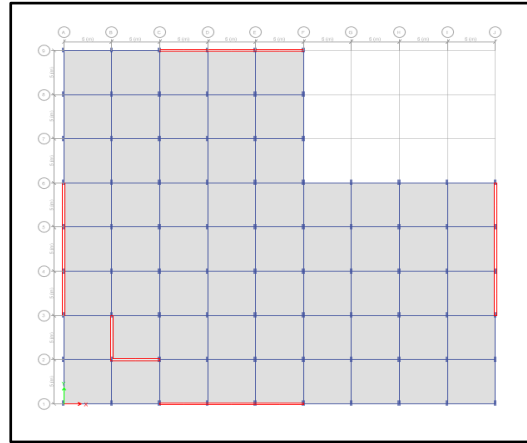


Fig. 6.8 MODEL 06 'L' SHAPED

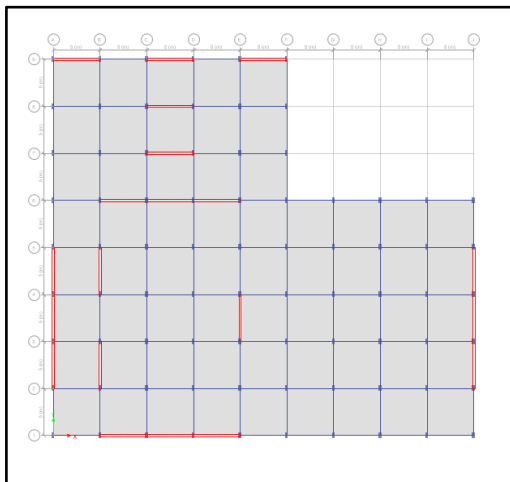


Fig. 6.5 MODEL 03 'L' SHAPED

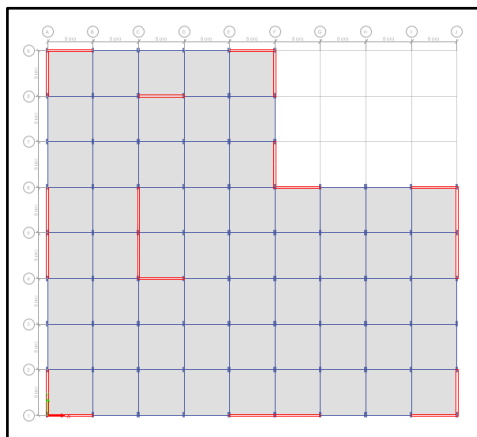


Fig. 6.6 MODEL 04 'L' SHAPED

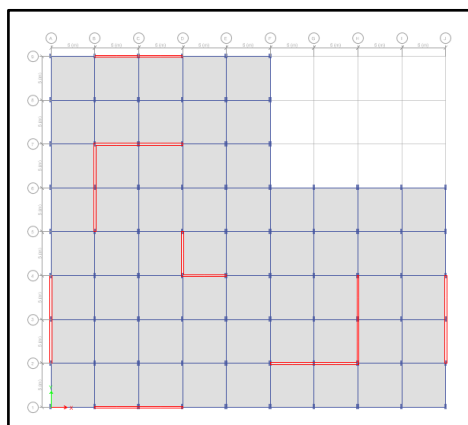


Fig. 6.7 MODEL 05 'L' SHAPED

VII. COMPARATIVE STUDY
STOREY DISPLACEMENT

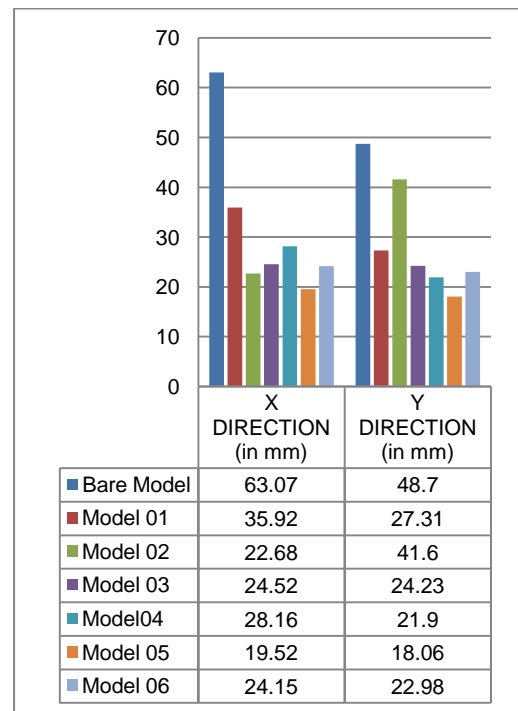


Fig. 7.1 Maximum Storey Displacement from Response Spectrum Analysis

Role of Position of Shear Wall in Reducing Torsion & Storey Displacement in an Irregular Building

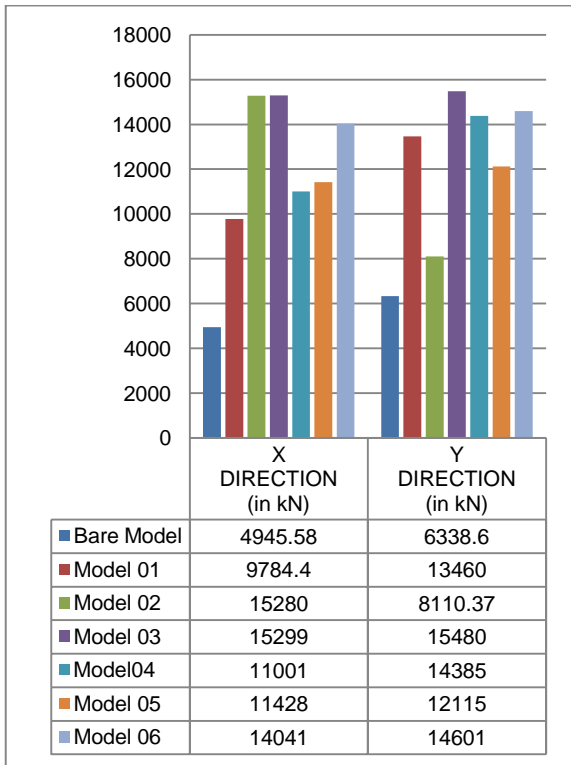


Fig. 7.2 STOREY SHEAR from Response Spectrum Analysis

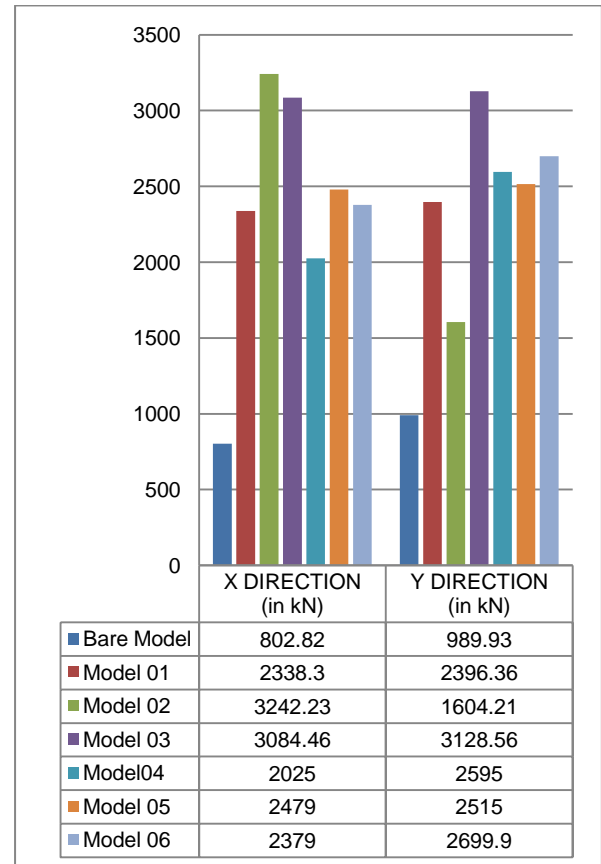


Fig. 7.4 BASE FORCE from Time History Analysis

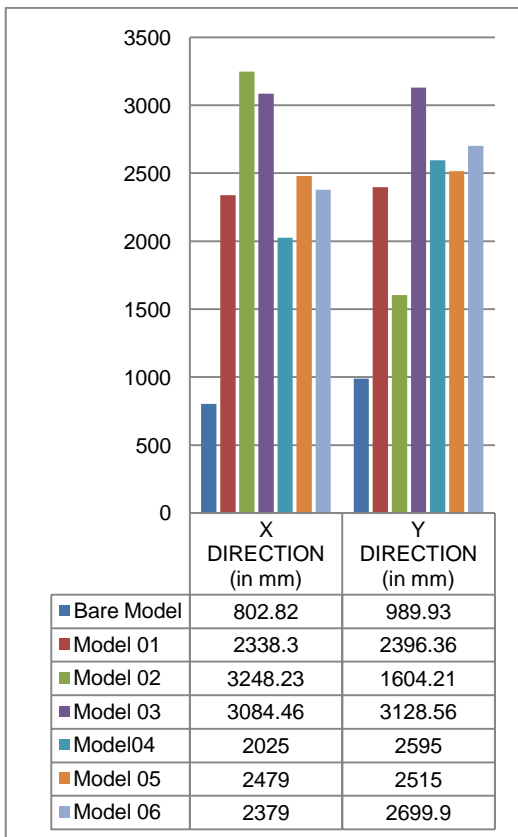


Fig. 7.3 Maximum Joint Displacement from Time History Analysis

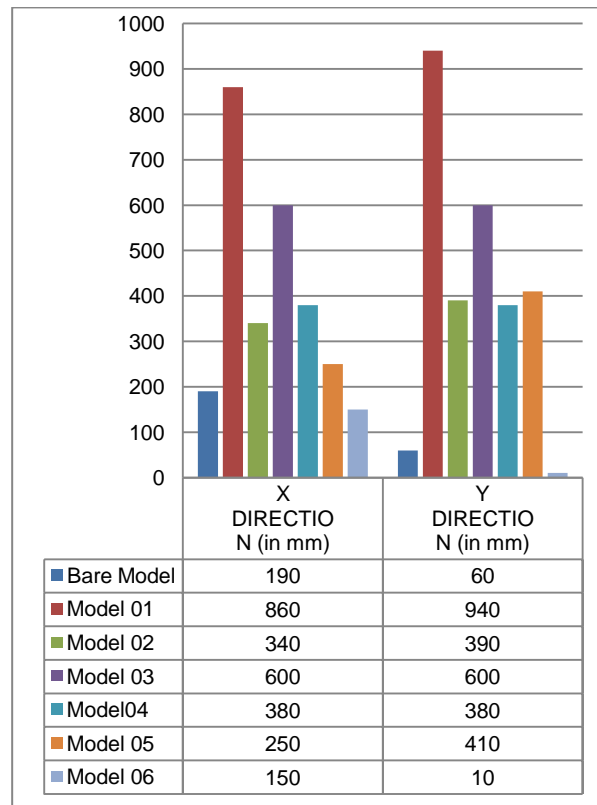


Fig. 21 ECCENTRICITY (in mm)

VIII. RESULT

The comparative study was carried out in order to study the role of shear wall in reducing the torsion and lateral displacement. On conducting the study at the mentioned models, we got MODEL 06 to be the best in reducing the torsional forces due to eccentricity and lateral displacement.

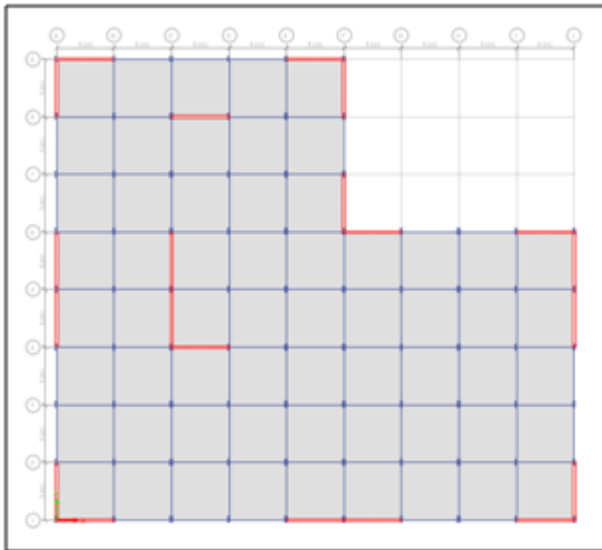


Fig. 8.1 MODEL 06 'L' SHAPED

IX. CONCLUSION

On a conclude note, I would like to mention the following points regarding the role of shear wall in reducing the torsion and lateral displacement in the building –

1. The position of the shear wall in Dual System should be such that, it generates minimum eccentricity between centre of mass and centre of stiffness.
2. Avoid the inclusion of soft stories in the high rise building because it will cause concentration of stress and thus failure in the extreme conditions
3. The strength of the structural members is more important than structural stiffness because this is more effective in controlling drift.

REFERENCE

1. IS 1893:2016 (PART-1)
2. Nobua Takai, Michiko Shigefuji, Sudhir Rajaure, Subeg Bijukchhen, Masayoshi Ichiyanagi, Megh Raj Dhita and Tsutomu Sasatani, "Strong Ground Motion in the Kathmandu Valley during the 2015 Gorkha, Nepal Earthquake", *Earth, Planets, Space* (2016) 68:10, DOI: 10.1186/s40623-016-0383-7.
3. Bungale S. Taranath, "Reinforced Concrete Design of Tall Buildings", *Tall Building*, CRC Press Taylor & Francis Group, ISBN No. 978-1-4398-0480-3
4. Rajiv Banerjee, Prof. J.B. Srivastava, "Determination of Optimum Position of Shear Wall in Irregular Building in Zone III & IV", *International Journal of Innovative Technology and Exploring Engineering(IJITEE)*.Vol. 9, November 2019, Issue-1, ISSN No 2278-3075.
5. Rajiv Banerjee, Prof. J.B. Srivastava, "Defining Optimum Location of Shear Wall in an Irregular Building by Considering Torsion", *International Journal of Engineering and Advanced Technology (IJEAT)*, Vol. 9, Issue – 4, April 2020, ISSN No. 2249-8958

AUTHORS PROFILE



Rishabh Srivastava is pursuing M.Tech in Structural Engineering from Integral University, Lucknow. He got his degree of B.Tech (Hons.) in Civil Engineering in 2018 from Dr. A.P.J. Abdul Kalam Technical University, Lucknow. He works as Graduate Engineer Trainee in H & C Consultants, Lucknow.



Rajiv Banerjee is an Associate Professor in Integral University. He was an Executive Engineer in Municipal Engineering Directorate, Govt. of West Bengal. He has got more than 20 years of experience in construction industry and also more than 7 years of experience in Academics.