



Behaviour of Paver Block with Sugarcane Effluent

P. Kanaka, K. Thiyagu, K. Anbarasi, S. Southamirajan, K. Vengatesh

Abstract: *Populace blast combined with urbanization has raised the interest for water bringing about its shortage. With industrialization, the quantum of waste water produced too has taken off up justifying proper measures for use of the equivalent. We are here putting a stage forward to use the mechanical effluents in development industry. Practically all businesses dismiss there effluents either into rural terrains or into normal water bodies. We are thinking about the gushing waste water which is being placed in rural terrains from sugarcane businesses. Since the use of sugarcane modern waste water was not successfully done as such far, we accepting this task as a test. We gathered water tests and tests were directed to know its qualities. We directed tests to know pH and the outcome was contrasted and the Indian guidelines IS 10500 (2012) for drinking water. As the water utilized for drinking reason that the sugarcane modern waste water can be used for development purposes. As a second step we need to cast lab scale solid squares of M20 grade and ought to be tried for different new concrete and solidified solid tests. The side-effects of sugarcane like bag gash, press mud are utilized as substitutions of totals; we without a doubt accept that our venture will become achievement. With the ebb and flow water shortage in India there is a need to search for interchange hotspot for solid creation. By doing this undertaking we can move the solid business towards zero release office, and in this manner decreasing the wastage of a valuable normal asset.*

Keywords: *Paverblock, Samples, Waste water, Water scarcity.*

I. INTRODUCTION

The development business in India presently utilizes compact water in the solid business. Be that as it may, convenient water is a valuable asset, and in that capacity, the utilization of versatile water in development industry will expand the interest of compact water, which is a panic asset. Thus an exertion has been made to utilize mechanical effluents to fix and use for blending in concrete and in this way spare water assets. By the by, development in populace, farming and different ventures devours expanding supplies of compact water, and in this manner.

Manuscript received on May 25, 2020.
Revised Manuscript received on June 29, 2020.
Manuscript published on July 30, 2020.

* Correspondence Author

P. Kanaka*, Department of Civil Engineering, Kongunadu College of Engineering and Technology, Trichy, India. E-mail:kanakasivam@gmail.com

K. Thiyagu, Department of Civil Engineering, Kongunadu College of Engineering and Technology, Trichy, India. E-mail:kthiyagu.civil@gmail.com

K. Anbarasi, Department of Civil Engineering, Kongunadu College of Engineering and Technology, Trichy, India. E-mail:kbanbuarun@gmail.com

S. Southamirajan, Department of Civil Engineering, Kongunadu College of Engineering and Technology, Trichy, India. E-mail:southamirajan@gmail.com

K. Vengatesh, Department of Civil Engineering, Kongunadu college of Engineering and Technology, Trichy, India. E-mail:vengatkabi@gmail.com

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an [open access](http://creativecommons.org/licenses/by-nc-nd/4.0/) article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>)

Despite the fact that it is realized that water appropriate for drinking can be utilized in solid, water with up to 100 sections sulfur trioxide or 50 sections chlorine for every 100,000 liters being not questionable for planning of cement.

The point of this undertaking is to redesign the properties of treated wastewater by a creative procedure with the goal that esteem expansion is made to the wastewater and interest for versatile water is reduced. We along these lines coordinate our water ventures, just as our workforce and undertaking improvement for the agribusiness programs. This will be financially gainful to both the administration and the development business. The use of reusing treated emanating in development industry must be completed to effectively build up our nations .Therefore the focal point of this examination is to consider the pertinence of reusing the treated profluent in solid innovation since some non-consumable water is seen as reasonable as the solid blending water.

A. Aim

The point of the investigation is to break down the wellbeing utilization of sugarcane profluent water in concrete and to invigorate the correct for the necessary development.

B. Objective

The fundamental target of this undertaking work is

- To analyze the gushing treated water from the businesses.
- To lessens the expense and accessibility of water in the locales
- To distinguish the key wellbeing factors in the development
- To decide its quality in concrete with explicit M20 evaluation of concrete and Advantages of utilizing sugarcane water for the development ventures.

II. SUGARCANE WASTE WATER

Sugarcane is any of six to 37 species (contingent upon which ordered framework is utilized) of tall lasting genuine grasses of the sort Saccharin, clan Andropogoneae, local to the warm calm to tropical areas of South Asia. The world interest for sugar is the essential driver of sugarcane farming. Stick represents 80% of sugar delivered; the vast majority of the rest is produced using sugar beets. Sugarcane dominantly develops in the tropical and subtropical locales, and sugar beet prevalently develops in colder.

III. CHARACTERISATION OF WASTEWATER SAMPLE

A. Shading

In the current examination, the shade of the untreated emanating was dim yellow. Shading is a subjective trademark that can be utilized to survey the general state of wastewater.

Wastewater that is light earthy colored in shading is under 6 h old, while a light-to-medium dim shading is normal for wastewaters that have experienced some level of disintegration or that have been in the assortment framework for quite a while.

B. Smell

From the accessible information, it was seen that untreated SIWW have fishery smell Unpleasant scents in food industry wastewater are typically brought about by gases created by anaerobic disintegration of natural issue. The most well-known smell causing compound is hydrogen sulfide whose trademark scent is that of spoiled eggs.

C. Temperature

Temperature is essentially significant for its impact on certain concoction and natural radiations occurring in water for life form and possessing oceanic media. It was seen that temperature of the untreated emanating was recorded as 40 °C.

D. pH

pH is the worth communicated as the negative logarithm of the hydrogen particle fixation. Its range was give between 0 to 14, if the worth is 7 methods impartial under 7 being acidic or more 7 being essential or basic. The wide portrayal in the pH estimation of profluent can influence the pace of organic response and endurance of different microorganisms. The nearness or nonattendance of different ionic extraordinary can have direct connection with pH of the gushing. In this way, such gushing can impact the nature of soil. In the current examination, the pH estimation of the untreated effluents was 5.5. The pH of the gushing was changed in accordance with 6.5 to fulfill the Indian guideline IS 456: 2000, along these lines the profluent ought to be dealt with a long time before utilizing it to the solid.

IV. COLLECTION AND TREATMENT OF SAMPLE

The treatment process which was followed in Sakthi Sugars is ‘Aerobic Conventional Treatment Process’ This Aerobic process is done with the help of sunlight.

E. Process

The ATS process generally consists of the subsequent phases:

- Pre-treatment stage to get rid of large solids and other undesirable substances from the wastewater; this stage acts very similar to a septic system, and an ATS could also be added to an existing tank to further process the first effluent.
- Aeration stage, where the aerobic bacteria digest the biological wastes within the wastewater.
- Settling stage to permit any undigested solids to settle.

This forms a sludge which must be periodically removed from the system.

- Disinfecting stage, where chlorine or similar disinfectant is mixed with the water, to supply an antiseptic output.

V. TEST ON MATERIAL AND SPECIMENS

Table 5.1 Specific Gravity of Materials

Material	Wt. of Pycnometer (g)	Wt. of Pycnometer + Material (g)	Wt. of Pycnometer + Material + Water (g)	Wt. of Pycnometer + Water (g)	Specific Gravity
Fine aggregate	610	810	1578	1455	2.6
Coarse aggregate	610	810	1581	1455	2.7
Cement	610	810	1589	1455	3.15

Table 5.2. Compressive Strength at 7 days

SPECIMENS	SURFACE AREA (mm ²)	LOAD (kN)	COMPRESSIVE STRENGTH (N/mm ²)
Conventional concrete mix	22500	310	13.78
Partial mix with sugarcane wastewater	22500	290	12.89
Sugarcane wastewater mix	22500	300	13.33

Table 5.3. Compressive Strength at 14 days

SPECIMENS	SURFACE AREA (mm ²)	LOAD (kN)	COMPRESSIVE STRENGTH (N/mm ²)
Conventional concrete mix	22500	450	20
Partial mix with sugarcane wastewater	22500	440	19.56
Sugarcane wastewater mix	22500	480	21.33

Table 5.4. Compressive Strength at 28 days

SPECIMENS	SURFACE AREA (mm ²)	LOAD (kN)	COMPRESSIVE STRENGTH (N/mm ²)
Conventional concrete mix	22500	560	24.89
Partial mix with sugarcane wastewater	22500	600	26.67
Sugarcane wastewater mix	22500	700	31.11



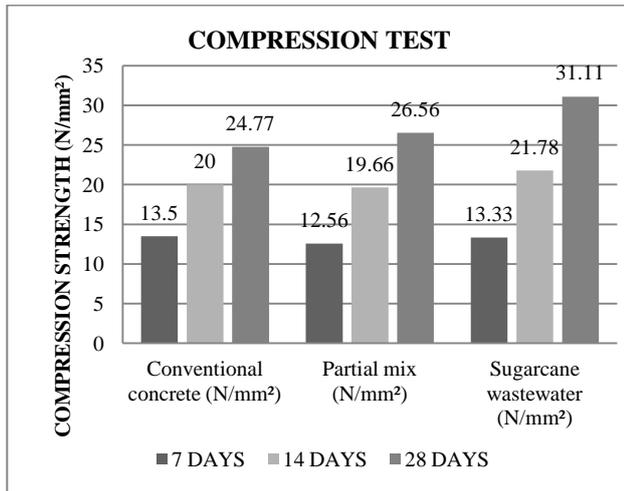


Fig.1. Graphical View of Compression Test Results

Table 5.4. Water Absorption of Specimens

WATER ABSORPTION PERIOD	CONVENTIONAL CONCRETE (Kg)	SUGARCANE WASTEWATER MIX (Kg)
INITIAL TIME	2.616	2.468
AFTER 1 HOUR	2.648	2.635
AFTER 2 HOUR	2.665	2.675
AFTER 3 HOUR	2.672	2.681

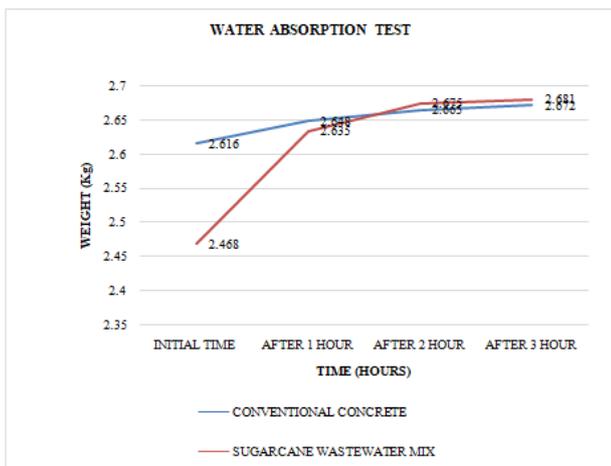


Fig.2. Graphical View of Water Absorption Results

VI. CONCLUSION

The outcomes acquired from this task on the different cement blends demonstrated that this sugarcane squander water didn't adverse affect compressive quality. Contrasted and solid cast with 100% consumable blending water, an expansion in compressive quality was seen in solid cast with sugarcane wastewater in the 28-days compressive quality.

The underlying and last setting occasions of concrete glue blended in with sugarcane wastewater increment contrasted and consumable water. The outcome got from this examination shows that sugarcane wastewater could be utilized as blending water in concrete in understanding in with IS3184. From the outcomes acquired in this examination, concrete with improved introductory compressive quality could be made with sugarcane wastewater utilized absolutely for the blending water in the solid area. It would be increasingly valuable in now-a-days due to the shortage of the typical water.

VII. REFERENCES

- Joulani, Nabil, and Riyad Abdel-Karim Awad. "The Effect of Using Wastewater from Stone Industry in Replacement of Fresh Water on the Properties of Concrete." *Journal of Environmental Protection* 10, no. 02 (2019): 276.
- Reddy, M. Vijaya Sekhar, K. Ashalatha, M. Madhuri, and P. Sumalatha. "Utilization of sugarcane bagasse ash (SCBA) in concrete by partial replacement of cement." *IOSR Journal of Mechanical and Civil Engineering* 12, no. 6 (2015): 12-16.
- Kadir, Aeslina Abdul, Shahiron Shahidan, Lau Hai Yee, Mohd Ikmal Haqem Hassan, and Mohd Mustafa Al Bakri Abdullah. "The effect on slurry water as a fresh water replacement in concrete properties." In *IOP Conference Series: Materials Science and Engineering*, vol. 133, no. 1, p. 012041. IOP Publishing, 2016.
- Al-Ghusain, Ibrahim, and M. Terro. "Use of treated wastewater for concrete mixing in Kuwait." *Kuwait journal of science and Engineering* 30, no. 1 (2003): 213-228.
- Al-Jabri, K. S., A. H. Al-Saidy, Rb Taha, and A. J. Al-Kemyani. "Effect of using wastewater on the properties of high strength concrete." *Procedia Engineering* 14 (2011): 370-376.
- Tay, Joo-Hwa, and Woon-Kwong Yip. "Use of reclaimed wastewater for concrete mixing." *Journal of environmental engineering* 113, no. 5 (1987): 1156-1161.
- Gadzama, E., O. J. Ekele, V. E. Anametemfiok, and A. U. Abubakar. "Effects of sugar factory wastewater as mixing water on the properties of normal strength concrete." *Civil Engineering Department. Modibbo Adama University of Technology, PMB 2076* (2015).
- Meena, Khushboo, and Salmabanu Luhar. "Effect of wastewater on properties of concrete." *Journal of Building Engineering* 21 (2019): 106-112.
- BIS (Bureau of Indian Standards). "Methods of tests for strength of concrete." (1959).
- Standard, Indian. "IS 10262: 2009, Concrete Mix Proportioning Guidelines." Bureau of Indian Standards (2009).
- Indian Standard, I. S. "IS 456 2000: Plain and Reinforced Concrete. Code of Practice (4th revision)." New Delhi (2000).
- Nataraja, M. C., and Lelin Das. "A study on the strength properties of paver blocks made from unconventional materials." *IOSR Journal of Mechanical and Civil Engineering* (2006): 1-5.

AUTHORS PROFILE



Ms.P.Kanaka Completed her Under Graduate in Civil Engineering and her Post Graduate in Structural Engineering.. She Was 3 Years of Experience in Teaching and Research Projects. Presently She's Working as Assistant Professor, Department of Civil Engineering in Kongunadu College of Engineering and Technology,Trichy . For Past 2 Years. She Has Attended 3International Conferences and also Published 3 Papers in International Journals Related To The Domain Area Concrete Technology. She's A Active Member in one of the Professional Body Indian Society of Technical Education.



Behaviour of Paver Block with Sugarcane Effluent



Mr. K. Thiyagu is working as Assistant professor in kongunadu college of Engineering and Technology, Thottiam, Trichy, Tamilnadu,India. He completed BE Civil Engineering and M.E. Structural Engineering in K.S.R.college of Engineering, Tiruchengode, Namakkal, Tamilnadu, India. He published 4 International journals,

He did his M.E. Project on Structural Behaviour of RCC Beam using Activated highvolume fly ash concrete. He is a Life Member in M.I.S.T.E. He has a teaching experience of 6 years.



Mrs. K. Anbarasi, completed her under graduate in civil Engineering and post graduate in structural engineering. She was 11 years of experience in teaching. Presently she's Working as assistant professor, department of civil Engineering in kongunadu college of engineering and technology,

trichy. for past 1 year she has attended 2 International conferences.



Mr. S. Southamirajan has completed his Under Graduate in Civil Engineering and his Post Graduate in Structural Engineering. He has 5.5 Years of teaching Experience and Research work. Presently he's working as Assistant Professor, Department of Civil Engineering in Kongunadu College of Engineering and

Technology, Trichy, Tamilnadu, India. For Past 5.5 Years, he has attended 3 International Conferences and 8 national conference and also Published 4 Papers in Journals Related to the domain Area of concrete technology.



Mr. K. vengetash,, currently pursuing his bachelor's degree in Department of civil engineering in kongunadu college of Engineering and technology, trichy. He has attended 3 international conference and and he also published 1 international journal in the field of concrete