

Network De-materialization in Open Flow Network

Lakshmi Narayan B N, Smriti Rai, Prasad Naik Hamsavath

Abstract—This review paper presents about the study of De-Materialization of Network known as Network Virtualization in SDN(Software-Defined Networking). It interprets the different paths to network virtualization in SDN. Also defines some contrasting mechanism to allocate resources.

Keywords: Openflow, De-Materialization, Telecommunications Access Method (TCAM), Multi-Protocol Label Switching (MPLS) and Hypervisor

I. INTRODUCTION

De-Materialization is a process of implicit adaption of the real system. The real system design of modern days applies the concept of openflow where the system utilities are dissociated from physical realization. Example of virtualization is the partitioning of storage device space like a hard drive to create two separate hard drives. The implementation of this generalization of conceptual model allows accomplishing operational objectives separated from the elemental physical infrastructure. In this modernized world, the workload can be migrated amidst physical servers and suspended if needed. Network De-Materialization divides a network. Once, the successful division of network is done then the numerous users and participants can share a single physical network. Several approaches were made to enhance the concept of dividing network where in , utilization of resources were improved through sharing, segregation of traffic amongst different entities was easy, was able to access limitless computing resources for faster and broader business capabilities and to simplify network management. During the implementation of the technique for dividing the network, the system should make sure that the traffic is separated amongst the users and there should not be any compromise in the confidentiality of virtual partitions. It should also implement the already formulated SLA's(Service Level Agreement) and should be adjustable and feasible to avoid pricey interaction and strategy amongst the parties involved, by reducing operational expenses. Computer virtualization is taken into consideration to understand virtual networking. Virtualization allows efficient utilization of computer hardware, it uses a software to create abstraction layer over computer hardware and allows the hardware elements of a computer (Ex: processor, memory etc.) to be sliced into multiple virtual computers called Virtual Machine (VM) [1]. Each VM has its own private Operating System (OS) and behaves like an Independent computer. Thus, different hardware can have their own set of instructions, which leads to more efficient system. Operating system can be implemented for networks, Data etc.

Revised Manuscript Received on November 20, 2020.

Lakshmi Narayan B N, Department of Master of Computer Applications, Nitte Meenakshi Institute of Technology, Yelahanka, Bengaluru, Karnataka

Smriti Rai, Department of Master of Computer Applications, Nitte Meenakshi Institute of Technology, Yelahanka, Bengaluru, Karnataka


Dr. Prasad Naik Hamsavath, Department of Master of Computer Applications, Nitte Meenakshi Institute of Technology, Yelahanka, Bengaluru, Karnataka

As the virtualization is improved by slicing and sharing the resources, once the network is virtualized the mechanism for the allocation of resources need to be provided. Each module of virtual network should get a fair share of the resources. The race of resources in this process leads to cumbersome traffic which is called Stress point[2].

II. OPEN FLOW

Open Flow makes arrangement for network traffic behaviour either to be implemented within switches or the software that runs on SDN controller. It is based on Ethernet switch which has a flow table and group table that performs packets lookups and forwarding [4]. Here, the production traffic and research traffic is segregated. Hence, the research persons can try their advanced protocols without arousing any effect to production traffic. Every open flow switch has a basic set of behaviour and has 3 main parts:

- 1.) Flow table entry has the account of the actions performed by Flow Table.
- 2.) Secure Channel which connects switch to a controller.
- 3.) Open flow Protocol which is the standard way for communication between controller and switch.

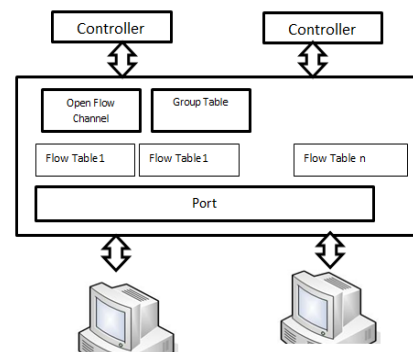

Open flow provides a platform where more research can take place in the field of networking. It does not require any specific software for the experiments that runs on different networks.

III. NETWORK HYPERVISOR

Network Hypervisor [6] is a program which provides the abstraction layer for network hardware. It is a wide software layer throughout the network that maps logical forwarding plane to underlying physical hardware. Network Hypervisor provides logical service model to the software and implements desired functionality on the hardware.

The main different components include:

1. Control Panel: It is a basic mechanism that mentions the clear network functionalities either through manual configuration or programmatic control [8].
2. Network Hypervisor: It provides abstraction layer for network hardware



3. Physical forwarding plane: Set of elements on physical network forwarding plane.
4. Logical forwarding plane: Logical abstraction of network. It has look up tables and ports.

Look up tables consists of forwarding tables usually built around a pipeline of TCAMS[9] with forwarding actions. Ports can be logical ports which is bound to physical ports. The packets should go through the following sequence.

- 1.) Directing incoming packet to the correct logical context, which is done by contributing some identifying tag such as MPLS header[10].
- 2.) Logical forwarding decision must be done.
- 3.) Directing the logical forwarding decision back to physical plane. At the edge of a logical forwarding it reaches one or more egress port on the logical network.
- 4.) Physical Forwarding.

It preserves the graph by joining every switch in the network. It contributes an API which constructs and maps logical forwarding elements to its physical network.

IV. FLOWVISOR

Flowvisor[4] is a technique for control side virtualization. It is achieved as a protocol proxy which interrupts information among open flow active switches and open flow controllers. Flowvisor layer is existing amidst underlying physical hardware and software that controls it. It hosts multiple open flow controllers, one controller per slice to control that particular slice assigned to it. A slice is a flow through switches[3]. Flowvisor ensures that every controller controls only the switches. It divides the flow entries of separate guest controllers. A slice is a small module of the entire space of packet header. In open flow, each of these flow entries will be made based on a 10-field packet header which is 256 bits long. Thus, there will be 2^{256} points in a 256-dimensional space. We can define various regions as a subset of space using bit masks if we define a header using $256-k$ bits (k denotes bit mask) then it has a k dimensional region. A slice is a small module of the entire space of packet header. This set of regions can be considered as a slice's flow space. Flowvisor acts as a transparent proxy between guest controllers and switch thus ensuring transparency and isolation between slices by the process of inspecting, rewriting and policing open flow messages as they pass. Flowvisor can control multiple switches and can virtualize another virtual network.

V. ADVISOR

Advanced Flowvisors similar to flowvisor except that in ADVISOR virtual topologies [4] for each virtual networks are not restricted by the underlying physical topology. It is existing between the physical network and the controllers. It can slice a virtual topology frequently and can directly reply to open flow network. Several components like virtual nodes are signified as a set of tuples and using these tuples Virtual topologies are identified[5].

Main parts of an ADVISOR includes:

- 1.) Topology Monitor which identifies whether the switch generating the open flow protocol message is at the endpoint of a link or a part of physical link.
- 2.) Link Broker which controls the switches which are present as part of a virtual link. Packets sent by these switches are controlled.

- 3.) Port mapper which edits the action field.
- 4.) Flowvisor which slices the network[6].

VI. NETWORK VIRTUALIZATION

As discussed above network virtualization is a process that is accomplished by slicing the network through data path and control channel virtualization. However, we need to ensure an appropriate separation among distinct virtual network and fair resource allocation. In datapath virtualization, separation needs to be established at link level and flow tables. A link level separation can be achieved by partitioning and encapsulation. The partitioning of the link is done by splitting it into multiple partitions, assigning one partition per virtual network[7]. Virtual network ID is a unique ID given to each Virtual network as link local encapsulation ID to which Virtual Network traffic will be mapped by in encapsulation process. In flow table, separation is done by two methods Flow space and table partitioning. Virtual Network will be assigned by a particular flow space. Every virtual network can move in to only that table where the match for a specific flow space is assigned to virtual network. In table slicing, the flow table is divided into multiple tables logically or physically and each VN is assigned a group of distinct flow tables. To ensure fair resource allocation at link level, we can use the classic QoS tools like classification, metering, colouring, policing etc. We must certify unbiased allocation of resources on the control channel i.e. the network that connects controller to the switches. If the control channels for dissimilar virtual networks are multiplexed over a particular cp connection it is difficult to discriminate control channels and to enforce QoS. If switches allow different controllers to connect and control the Virtual networks using different source or destination IP addresses or port numbers, the control traffic can easily distinguish between different connections and thus enforce QoS policies.

Control channel can be executed as out band or in band control channel.

1. Out band control channel:
 - Control signals and data traffic goes through distinct channels.
 - It is simple and easy to design.
 - More expensive as a result of extra network and ports on hardware.
2. In band control channel:
 - Data and control traffic goes through same channel.
 - Channel is weak to misconfigured[11] flow table entries for all packets.

It will be more beneficial to enforce in band channel, if QOS support is given to control traffic entering and outgoing from switch.

VII. CONCLUSION

Virtualizing a network supports in reducing the number of physical devices needed, effortlessly segments the network, improves resource utilisation, helps on the research of new protocols.



As we have reviewed that virtualization slices the network into data path and control channels, looking forward in the future we can implement efficient virtualization system.

REFERENCES

1. Pontus Skoldstorm and KiranYedavalli "Network Virtualization and Resource allocation in open flow based wide area networks."
2. N. McKeown, T. Anderson, H. Balakrishnan, G. Parulkar, L. Peterson, J. Rexford, S. Shenker, and J. Turner, "OpenFlow: enabling innovation in campus networks," ACM SIGCOMM Computer Communication Review, vol. 38, no. 2, pp. 69-74, 2008.
3. M. Gerola, "Enabling Network Virtualization in OpenFlowNetworksthrough Virtual Topologies Generalization."
4. R. Sherwood, G. Gibb, K. Yap, G. Appenzeller, M. Casado, N. McKeown, and G. Parulkar, "Flowvisor: A network virtualization layer," OpenFlow Switch Consortium, Tech. Rep, 2009.
5. E. Salvadori, R. Corin, M. Gerola, A. Broglio, and F. De Pellegrini, "Demonstrating generalized virtual topologies in an openflownetwork," in Proceedings of the ACM SIGCOMM 2011 conference on SIGCOMM.ACM, 2011, pp. 458-459.
6. M. Casado, T. Koponen, R. Ramanathan, and S. Shenker, "Virtualizing the network forwarding plane," in Proceedings of the Workshop on Programmable Routers for Extensible Services of Tomorrow. ACM, 2010, p. 8.
7. Natasha Gude, TeemuKoponen, Justin Pettit, Ben Pfaff, Marin Casado, Nick McKeown, Scott Shenker NOX: Towards an Operating System for Networks.
8. Andreas Blenk, Arsany Basta, Wolfgang Kellerer, Stefan Schmid. "On the Impact of the Network Hypervisor on Virtual Network Performance" Published in: 2019 IFIP Networking Conference (IFIP Networking)
9. Catherine E. Graves, Can Li, Xia Sheng, Wen Ma, Sai Rahul Chalamalasetti, Darrin Miller, James S. Ignowski. "Memristor TCAMs Accelerate Regular Expression Matching for Network Intrusion Detection". Published in: IEEE Transactions on Nanotechnology (Volume: 18). DOI: 10.1109/TNANO.2019.2936239
10. Fathurrahmad, Salman Yusuf, Taufiq Iqbal, Abdus Salam "Virtual Private Network (VPN) Network Design For Multiprotocol Label Switching (MPLS) Networks" INTERNATIONAL JOURNAL OF SCIENTIFIC & TECHNOLOGY RESEARCH VOLUME 8, ISSUE 11, NOVEMBER 2019 ISSN 2277-8616
11. Gi Tae Kim; Constantin Serban; Ritu Chadha "Attack-Resistant Routing : a Framework for Enhancing Routing Robustness in Wireless Ad-hoc Networks". Published in: NOMS 2020 - 2020 IEEE/IFIP Network Operations and Management Symposium. DOI: 10.1109/NOMS47738.2020.9110400

AUTHOR PROFILE



Mr. Lakshmi Narayan B N is currently working as an Assistant Professor for the Department of Masters of Computer Applications (MCA) at Nitte Meenakshi Institute of Technology, Yelahanka, Bangalore. He has a total of 12 years of experience in teaching and 1 year of industry experience. He is currently pursuing his Ph.D. from VTU, Belagavi, Karnataka. Mr. Lakshmi

Narayan B N pursued his Post Graduate Degree in MCA from PES College of Engineering, Mandya, Karnataka in 2008 and Graduate Degree in B.Sc (Computer Science) from PES Degree College, Mandya, Karnataka in 2004. His areas of interest for research include Computer Networks and IOT. He is also serving as a Board of Syllabus coordinator for the Department of MCA at NMITE, Bangalore. His teaching expertise includes IOT, .NET Programming, JAVA, Mobile Application, Computer Networks, Operating System, UNIX, Data Structures C++ and C. He has guided several research scholars and students in their research work and academic projects.



Dr. Prasad Naik Hamsavath is currently working as a Professor and Head of the Department of Master of Computer Applications (MCA) at Nitte Meenakshi Institute of Technology, Yelahanka, Bangalore. He has his PhD from Jawaharlal Nehru University (JNU), New Delhi, India. Dr. Prasad N H has more than 15 years of experience in different Government and Private Organizations. He has served as Assistant Director in

Software Technology Parks of India (STPI), Ministry of Communication

and Information Technology (MC&IT), New Delhi, Government of India and received the Best Employee award by then Director-STPI-Noida. He also served as 'Software Engineer' at Calance Software Pvt Ltd, Gurgaon, Haryana and later he served in Educational Consultants India Limited (EdCIL), Ministry of Human Resource and Development (MHRD), New Delhi, Govt. of India. He has authored 03 books and more than 15 books are edited by him on different emerging areas. His major research areas are Mobile Ad-hoc wireless networks, Information Systems, Computer Networks, Cloud computing, Internet of Things (IoT). He has received a prestigious award "Dr. Abdul Kalam Life Time Achievement Award" in the field of Teaching/Training/Research/Administration and also received "Young Faculty" award at 2nd Academic Brilliance Awards from Education Expo TV, New Delhi. He has lifetime membership of ISTE, MCSI and ACEEE. He is also the Program Chair and Chief Editor for the International conference on "Emerging Research in Computing, Information, Communication and Applications" – ERCICA -2013, 2014, 2015, 2016, 2018 and 2020 editions held at NMITE, Bangalore, India. The books of the Conference were published with Springer and indexed in all top ranked indexing databases. ERCICA is one of the prestigious events of NMITE and ERCICA is one of the top ranked International Conferences in the country, and is 'Trademarked' by the Controller General of Patents, Designs and Trademarks (CGPDTM), Chennai, Ministry of Commerce and Industry, Govt. of India. He has visited number of countries including Nepal, Bhutan, Sri Lanka, Bangladesh, Thailand, Mauritius, Ethiopia, Nigeria, Oman, Dubai under Ministry of Human Resource and Development, Govt. of India for the promotion of Indian Education abroad (Study in India Programme) and promotion of NMITE foreign admissions.



Ms. Smriti Rai is currently working as an Assistant Professor for the Department of Master of Computer Applications (MCA) at Nitte Meenakshi Institute of Technology, Yelahanka, Bangalore. She has a total of 10 years of experience in teaching and 10 months of industry experience. Ms. Smriti Rai pursued her Post Graduate Degree in MCA from S.I.E.S College of Management Studies, Mumbai, Maharashtra in 2008 and Graduate Degree in B.Com from S.I.E.S College of Commerce & Economics, Mumbai, Maharashtra in 2005. Her areas of interest for research include Software Engineering, Software testing and User Interface Design. Her teaching expertise includes Software Engineering, Software Testing and Automation in Selenium, User Interface Design, Organizational Behavior and Professional Communications & Ethics. She has guided several students in their academic projects.

