

Feature and Decision Level Fusion in Children Multimodal Biometrics



Bhavya D. N., Chethan H. K.

Abstract: In this paper, we design method for recognition of fingerprint and IRIS using feature level fusion and decision level fusion in Children multimodal biometric system. Initially, Histogram of Gradients (HOG), Gabor and Maximum filter response are extracted from both the domains of fingerprint and IRIS and considered for identification accuracy. The combination of feature vector of all the possible features is recommended by biometrics traits of fusion. For fusion vector the Principal Component Analysis (PCA) is used to select features. The reduced features are fed into fusion classifier of K-Nearest Neighbor (KNN), Support Vector Machine (SVM), Navie Bayes(NB). For children multimodal biometric system the suitable combination of features and fusion classifiers is identified. The experimentation conducted on children's fingerprint and IRIS database and results reveal that fusion combination outperforms individual. In addition the proposed model advances the unimodal biometrics system.

Keywords: Gabor, MR filter, HOG, KNN,SVM,NB

I. INTRODUCTION

Biometric systems have emerged as a new solution to satisfy our society's ever increasing demand of improved security requirements. The biometric system recognizes an individual based on an individual's own physiological and/or behavioral characteristics [1-3]. In literature, these features are also referred as traits. The physiological characteristics include fingerprint, palm print, iris, hand geometry, inner knuckle print (IKP), face, ear, etc., while voice, signature, gait, keystrokes are behavioural features etc. The major advantage of utilizing biometric traits are, it is difficult for intruders to steal biometric traits and physical presence of an individual is essential at the time of providing information for the recognition process. Furthermore, it offers reliable solutions to develop automated or semi-automated approaches to recognize individuals.

Multi-biometric system is success because of fusion scheme. The fusion scheme combines information from various different biometrics source. The biometric system will reduced the information at each level to process the

information. Here the final decision will contain abstract level of information. The four important modules are Sensor module, Feature extraction module, Matching module and Decision-making module are used fused at different level of different biometric traits. Later the feature level fusion and decision level fusion are employed. In our work the literature survey is presented in section 2. In section 3 discussion of feature extraction. The feature reduction is presented in section 4. The process of classifier is discussed in section 5. Final section 6 presents the result discussion. Results shows that fusion strategies increase the performance of biometric system.

Multiple sensors or multiple snapshots is used obtained the Raw data using of a single biometric trait captured using only one sensor [5-6] can be used for performing sensor level fusion. Fusion of raw biometric data depends on the sensors used for capturing biometric data. Very few reports were found in literature related to sensor level fusion. Features derived from preprocessed images are integrated for performing feature level fusion [7-12]. Lakshmi Deepika et al. [13] have discussed a multi algorithmic approach to extract features from hand veins. Extracted features are concatenated to create a single feature vector. FAR of 0.3% and FRR of 0.54% for a database consisting of images from 74 individuals are reported. Yong-Fang Yao et al. [14] have proposed a weighing strategy for a multimodal system that utilizes face and palm print modalities. The recognition rate of 90.7% is reported in the experimental test made with face and palm print data set. Jian-Gang Wang et al. [15] have presented an acquisition setup that acquires the palm print and palm vein images of an individual using two cameras. A new feature called as "junction" derived from both the palm print and palm vein image is proposed. Experimental results indicate a low error rate in multimodal palm print and palm vein than that of either palm print or palm vein individually. Nageshkumar et al. [16] have proposed a multimodal biometric system based on face and palm print. A feature level fusion strategy based on Eigen values and Eigen vectors is proposed. Experiments conducted on 720 images acquired from 120 individuals report a FAR of 2.4% and FRR of 0.8%. Feature level fusion produces best results when modalities are related (e.g. Iris left and right eye) than when they are unrelated (e.g., hand and face). Finding the relationship between features is difficult when different algorithms are used to extract features from different traits. Also concatenation of feature vectors results in a feature vector with high dimensionality, which leads to higher computational load.

Manuscript published on January 30, 2020.

* Correspondence Author

Bhavya D. N*, Department of Computer Science, University of Mysore, Karnataka, India. E-mail: bhavyavijay.dn@gmail.com

Chethan H. K., Professor, Department of Computer Science and Engg, MIT Thandvapura, Karnataka, India. E-mail: hkchethan@gmail.com

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an [open access](https://creativecommons.org/licenses/by-nc-nd/4.0/) article under the CC-BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>)

The match scores output by multiple biometric matchers are combined to generate a single scalar score. Miguel A et al. [17] proposed a multimodal system based on the hand geometry, palm print and finger print modalities. Different set of rules for feature, score and decision level fusion are proposed.

Experiments conducted report best results for decision level fusion with FAR of 0% and FRR of 0.15%. A database of 109 user images is used for experimentation. Jingyan Wang et al. [18] have presented a new fusion scheme to fuse iris and palm print modalities at score level. An error rate of 1.50% is reported with their work highlighting the effect of score normalization on computational time required for the entire recognition process. Yang et al. [19] have proposed two recognition models based on fingerprint, palm print and hand geometry. In the first model the match score from finger prints of all fingers are fused and the resultant score is fused with palm-print and hand-geometry scores. In the second model palm print and fingerprint scores are fused first and the resulting matching score is fused with the hand geometry match score. Results presented highlight the advantages of using fusion schemes at match score level in multimodal recognition systems. Other score level fusion schemes proposed in the literature are reported in [20-22]. Monawar et al. [23] have proposed a markov chain method for consolidating the rank information of face, iris and ear modality matchers. Rank(1) CIP of 98.5% is reported for markov chain method. Monawar et al. [24] have consolidated rank information of face, ear and signature matchers using logistic regression and Borda count methods. Authors have modified both the methods by considering the top ranks identities that appear in two rank lists out of three rank lists of face, ear and signature matchers. Abass et al. [25] have incorporated image quality information in the fusion rule to analyse the performance of rank-level fusion for logistic regression and Borda count method. Quality based scheme is proposed by the authors to evaluate the rank level performance for varying image quality in input data. For logistic regression method rank 1 CIP percentage decreases if the quality of input image changes from the quality of images used in the training phase. Stable Rank(1) CIP of 94% is reported for a borda count method for varying image quality. Rank list obtained from three different palmprint matchers that uses Line, Gabor and Eigen palm features are consolidated using a non linear rank level fusion approach by Ajay Kumar et al. [26]. The authors have investigated Borda count, weighted Borda count, highest & product of ranks and Bucklin majority voting methods. Results presented suggest that rank level combination achieves higher Rank(1) CIP. Authors have reported 84% Rank(1) CIP for Borda count and average Rank(1) CIP of 98.75% for the non linear rank level fusion methods. A multimodal biometric system using face and ear biometric traits with fusion applied at rank level is proposed by Padma Polash Paul and Marina Gavrilova[27]. Multiple random projections are used to generate multiple templates and rank level fusion is applied to generate consolidated decision from multiple ranks. Authors have reported 64% and 70% Rank(1) CIP for face and ear traits. Rank(1) CIP of 84% is reported for the multiple template approach. A predictor based technique that uses rank and

score information of unimodal traits to improve the performance of biometric system is proposed by Emanuela Marasco et al. [28]. Information generated by unimodal trait predictors is used to design rank level fusion scheme that can work in a multimodal scenario. CIP of 97.22% is reported, but predictors are developed using the training phase data. Match score level fusion approaches are applied to verification and rank level fusion methods for identification functionality of the biometric system. These approaches are widely used because the score output from matching modules can be easily integrated. Decision level fusion presented in the literature includes weighted combination [29], AND and OR rules [30], majority voting [31] and Bayesian decision fusion [32]. Decision level fusion is less preferred since the information content available from individual decision modules is either true or false.

Bharadwaj et al. [33] and Jain et al. [34] proposed the biometric recognition using face and fingerprint. Bharadwaj et al. [33] proposed a system for face recognition. The children's finger print data is collected and presented by Jain et al. [34]. Bharadwaj et al. [33] have created a face database of 1200 images for newchildrens. Jain et al. [34] created a database of children of age 0 to 5 years. Tiwari et al. [35] presents multimodal biometrics system for new born children's consists of face, ear and headprint. Main drawback of this research is availability of young children database.

II. METHODOLOGY

Here, we planned a Children multimodal biometric system of fingerprint and IRIS by integrating the information at feature level and decision level. Initially, HOG, Maximum Response Filter and Gabor features are extracted from both fingerprint and IRIS of a Children and are individually studied for their identification accuracies. Later, the fusion of the biometric traits is recommended at feature level using the best representation, which is subsequently classified using fusion classifier of NB, SVM and KNN.

A. Feature Extraction

In proposed system, for given images we extracted Gabor Filter responses, HOG and MR filter features.

B. Histogram of Oriented Gradients (HOG)

Histogram of oriented gradients (HOG)[37] is a descriptor used to detect the objects in image. This technique computes the occurrence of incline orientation in all the localized portion of an image. The HOG descriptors are defined by the appearance of the object and represented by intensity gradients distribution or the edge direction. In this algorithm every picture is represented with cells and for each cell the histogram is computed. This histograms are called as Descriptor. The neighborhood histograms can be differentiate standardized and precision can be enhanced by computing a measure of the force for a bigger district of the question is

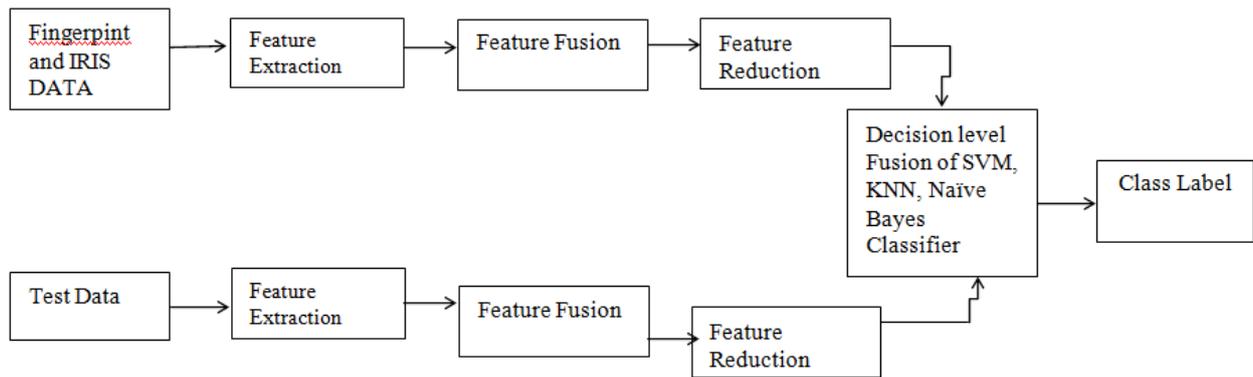


Figure 1: Shows the Block Diagram of Proposed method

know as piece, and utilizing the square esteem is utilized standardize all cells inside this piece. The HOG descriptors is a window base descriptor it is commonly used in object recognition and human detecting method it will compute that local to a detected interest point. Window is entree upon the point of interest and divides into regular square grids (n x n). Within the reach an every cell the grids a frequency histogram is computed representing the distribution of edges orientation within in these cells. The limited intensity gradients or boundary detection distribution distinguishes the appearance of the local object and shape. In octal region to HOG features are intended by taking edge intensity of oriented histogram. In HOG features extraction process, the feature extraction is complete form a local region with 16 x 16 pixels. The 8 orientations Histogram of Gradients are calculated from of 4 x 4 cells and hence total num of HOG features comes $128 = 8 \times (4 \times 4)$ which is done from 16 x 16 local regions.

The descriptor with a small change in the positions of the window and gives the low prominence to gradients in order to avoid the sudden changes than of far from centres of descriptor. The weight to each magnitude pixel is assigned by Gaussian weighing function σ which is equal to 1 half of the size of the descriptor window. A HOG features describes the narrow shape of objects, having edge information at different cells. In plain reigns, the histogram of oriented gradients[37] will have flatter dimensions for example: ground or building wall whereas in the borders, most one of the elements in the histogram has a largest value and it indicates edge direction. Even though the images are normalize to the place and scale, the positing of main features will not be registered with the same position in the grid. The HOG features are resilient of photometric transformations and local geometry. Translation or orations of the object with much smaller neighboring spatial bin size has comparatively small effect.

C. Maximum Response Filter

MR works the rule of nuclear attractive reverberation, to delineate spatial areas and dissect its cores and proton properties in view of its collaborations and core turns. As we as a whole know human firm is comprised of water and fat atoms. Each water atoms contain 2 hydrogen particles. Every hydrogen atoms contain a few protons and a core. These protons are dissected for neurotic and mental parts of tissues. At the point when hydrogen particle is set in attractive field, its cores adjust itself in course opposite to its field connected. At the point when attractive field is expelled, cores realign

itself at typical position. This create RF motion at reverberation recurrence. Recurrence and stage information of these signs are gathered in k-space. In parallel imaging, there are different curls are utilized for parallel execution of numerous MR pictures. Recurrence and stage factor prompted utilization of aggregate of-square calculation. It is characterized as the quadrangle foundation of aggregate of square of pixel from singular loop. With its assistance, unmistakable data can be acquired by examining distinctive k-space parallely and diminishes its securing time. The quantity of k-space diagram is lessened. Each picture that is acquired from recipient is a sub inspected pictures.

So picture get from each curl is associated picture. These pictures are unfurl or missed k-space lines are recovered utilizing earlier data. Parallel reproduction techniques are isolated into two. Picture territory based modernization and k-space based strategy. In first technique, picture is unfurled utilizing loop maps. In second, miss k-space lines are recovered to remake a picture. Its primary favorable position is its securing speed that expels bending caused by specific curios, by averaging them[38].

D. Gabor Filter Responses

Gabor functions belong to frequency-based approaches. In this approach, texture is an image pattern containing a repetitive structure that’s categorized in a Fourier domain. The challenge is to deal with trade-off between joint uncertainty and frequency domains. The aim of the gabor function minimize the joint uncertainty in space and frequency. The gabor filter are applied on bank of scale and orientation selective to an image[39]. Gabor function $g(x; y)$ and its Fourier transform $G(u; v)$ is define by

$$g(x, y) = \left(\frac{1}{2\pi\sigma_x\sigma_y} \right) \exp \left[-\frac{1}{2} \left(\frac{x^2}{\sigma_x^2} + \frac{y^2}{\sigma_y^2} \right) + 2\pi Wx \right]$$

and

$$G(u, v) = \exp \left\{ -\frac{1}{2} \left[\frac{(u - W)^2}{\sigma_u^2} + \frac{v^2}{\sigma_v^2} \right] \right\}$$

where $i = \sqrt{-1}$, $\sigma_u = 1/2\pi\sigma_x$ and $\sigma_v = 1/2\pi\sigma_y$ control the tradeoff between spatial and frequency resolution, and W controls the modulation.

III. PRINCIPAL COMPONENT ANALYSIS (PCA)

Principal Component Analysis (PCA) is a current approach for reducing the dimension of feature vectors and analyzing data proposed by Jolliffe et al. [40].

PCA Algorithm is as follows:

- Normalization of features to zero means and unit variances.
- Calculation of covariance matrix C.
- Finding Eigen values and the corresponding Eigen vectors.
- Sorting the Eigen values from highest to lowest.

Here Eigen values with Greater Values is the first principal component that contains important information

Reject low Eigen value principal components.

IV. DECISION LEVEL FUSION

The extracted features are fed into fusion classifier of KNN, SVM and Naïve bayes. Here we combine the decision of all the classifiers.

A. K Nearest Neighbor (KNN)

New instance query is classified in K-nearest neighbour classifier[41] based majority voting. It also a supervised learning algorithm. The aim of the algorithm to classify the new object based on features and per defined training samples. The training samples are defined by n-dimensional numeric features. Every sample is a point in dimensional space. Most challenging is to search the K value. If K>1 then majority vote decide the class label. The KNN algorithm deals with various data types like ordinal, nominal to quantitative scale. The algorithm uses multiple features Si to classify the object R. The Euclidean distance between Query sample and all the training samples are computed. Later the distance values are sorted from lowest to highest. Later class labels are assigned for the sorted distance. Finally majority voting on class label is obtained. Test sample is assigned to particular class.

B. Naive Bayes classifier

The new sample is classified to probable class using Naïve Bayes classifier[42]. Here for the given class value the features are independent conditionally. When compare to other classification method Naïve bayes classifier performs best and classify the new object to correct class.

Algorithm follows two steps. Training step: in which parameter of probability distribution is estimated and features are independent conditionally. Secondly the predication step here posterior probability of test sample is computed for sample belong each class. The test sample is assigned to particular class based on posterior probability.

Bayes theorem uses the eqn as given in eq.

$$P(C_i|V) = \frac{P(V|C_i)P(C_i)}{P(V)}$$

Naïve assumption of class conditional independence Thus,

$$P(V|C_i) = \prod_{k=1}^n P(x_k|C_i)$$

C. Support vector machine

SVM [44,45] is one of successful tool to classify the data introduced by Vapnik, 1998. Initially it a binary classifier,

aim is to find hyper plane to classify the two groups data. In addition, it acts has liner classifier in high dimensional space. The non-linear classifier archives good accuracy by by exploiting the boundary between the classes. The primal optimization problem is solved using SVM with L1 soft-margin formulation

$$\min \frac{1}{2} \|w\|^2 + c \sum_{ij=1}^m \xi_i$$

$$sty_i(w \cdot z_i + b) \geq 1 - \xi_i, \xi_i \geq 0, i = 1, 2, \dots, m$$

C is a regularization parameter.

V. EXPERIMENTAL SETUP

Fingerprint and IRIS based Children Multimodal biometrics are considered. For both databases the features like Gabour, MR filter, HOG are extracted. Feature selection is through PCA. Classification is through kNN, Naive Bayes and SVM Classifier.

A. Results

Here, we described the experimental results obtained for the proposed multimodal biometric system based on feature level fusion of FingerPrint and IRIS. The proposed model is tested on database of iris, fingerprint, and face images of Children Multimodal Biometric Database (CMBD). That Contains 100 children with age grauop of 18 months to 4 years, acquired over two sessions[36]. In order to evaluate the performance of the proposed classification system, Gabor and MRfilter, HOG features are extracted from both databases. The system was trained using 70%, 50%, and 30% samples per user and was tested with the remaining samples per user respectively.

Figure 2 shows the accuracy of the summary of the individual and fusion classifier recognition accuracy under varying database size using different representatives. Further we also conducted experimentation by varying by selecting the features using PCA shown in Table 1. Table 1 shows the results of individual and fusion classifier. From accuracy tables it is observed that the feature level fusion of fingerprint and IRIS and fusion of various classifiers outperforms the fingerprint and IRIS when they are considered individually. Hence this fused feature vector is recommended for the proposed Children multimodal biometric system.

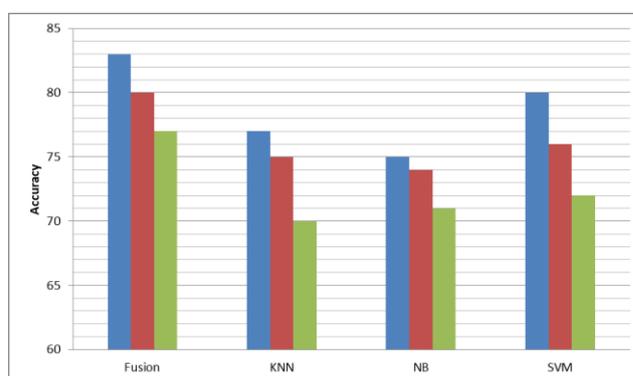


Figure 2: shows the accuracy of Individual and fusion classifier

Table 1: shows results of recognition rates under varying PCA features

PCA based features	Recognition rate			
	K-NN	Naïve Bayes	SVM	Fusion
20	84	85.8	83.2	86.1
40	86.1	86.2	88	88
60	88.2	88.1	91	91.2
80	88.6	90.4	92.2	93
100	89	90.8	93	93
120	89	91	93	93
140	89	91	93.4	94

VI. CONCLUSION

The two biometrics traits like fingerprint and IRIS are mostly used applications. The fusion of both traits is presented in this work. Some of the advantages of biometrics are robustness to noise, lowcost, off-the-shelf hardware data acquisition. In this work, we presented Multimodal System by fusing various features and classifiers. For fusion features we have used MR filter, HOG and Gabor. The features are fed into fusion classifier of KNN, SVM and NB. The experimentation is conducted on Children Multimodal Biometric Database (CMBD). The experimental results show that fusion information from independent source increase the performance. This work does investigation at feature level and decision level and the results are motivating.

REFERENCES

1. Stan Z. Li, "Encyclopedia of Biometrics", Springer Science & Business Media, 2009.
2. Anil K. Jain, Patrick Flynn, Arun A. Ross, "Handbook of Biometrics", Springer Science and Business Media, 2008.
3. Anil K. Jain, Arun A. Ross, Karthik Nandakumar, "Introduction to Biometrics", Springer Science, 2011.
4. G Hemantha Kumar and Mohammad Imran, "Research Avenues in Multimodal Biometrics", IJCA Special Issue on Recent Trends in Image Processing and Pattern Recognition RTIPPR, 2010.
5. J.G. Wang, W.-Y. Yau, A. Suwandy and E. Sung, "Person Recognition by fusing palmprint and palm vein images based on Laplacian palm representation", Pattern Recognition Journal, vol. 41, pp.1514-1527, 2008.
6. David Zhang, Vivek Kanhangad, NanLuo, AjayKumar, "Robust palmprint verification using 2D and 3D features", Pattern Recognition Journal, vol. 43, pp 358 – 368, 2010.
7. Mohammad Haghghat, Mohamed Abdel Mottaleb, Wadee Alhalabi, "Discriminant Correlation Analysis: Real-Time Feature Level Fusion for Multimodal Biometric Recognition", IEEE Transactions on Information Forensics and Security, vol. 11, Issue 9, September 2016.
8. Yong-Fang Yao, Xiao-Yuan Jing, Hau-San Wong, "Face and palm print feature level fusion for single sample biometrics recognition", Neuro Computing vol. 70, pp1582–1586,2007.
9. Jian-Gang Wang, Wei-Yun Yau, Andy Suwandy, "Feature Level Fusion of Palmprint and palm vein for person recognition based on a Junction Point Representation", International conference on image processing, Cario, Egypt, pp 253-256, 2009.
10. Madasu Hanmandlu, Jyotsana Grover, Shantaram Vasikarla, Hari Mohan Gupta, "Error Level Fusion of Multimodal Biometrics", Journal of Pattern Recognition research, vol. 6, no. 2, pp154-165, 2011.

11. Suryanti Awang, Rubiyah Yusof, "Fusion of Face and Signature at the Feature Level by using Correlation Pattern Recognition", World Academy of Science, Engineering and Technology, 2011.
12. Ujwalla Gawande, Mukesh Zaveri, Avichal Kapur, "Bimodal biometric system: feature level fusion of iris and fingerprint", Biometric Technology Today, Volume 2013, Issue 2, pp 7th-8th, February 2013.
13. C.Lakshmi Deepika, A.Kandaswamy, "An Algorithm for Improved Accuracy in Unimodal Biometric Systems through Fusion of Multiple Feature Sets", ICGSTGVIP Journal, ISSN 1687-398X, vol. 9, Issue 3, pp 33- 40, June 2009.
14. Yong-Fang Yao, Xiao-Yuan Jing, Hau-San Wong, "Face and palm print feature level fusion for single sample biometrics recognition", Neuro Computing, vol. 70, pp1582–1586, 2007.
15. Jian-Gang Wang, Wei-Yun yau, Andy Suwandy, "Feature Level Fusion of Palmprint and palm vein for person recognition based on a Junction Point Representation", International conference on image processing, Cario, Egypt, pp 253-256, 2009.
16. Nageshkumar. M, Mahesh.PK and M.N. Shanmukha Swamy, "An Efficient Secure Multimodal Biometric Fusion Using Palmprint and Face Image", IJCSI-International Journal of Computer Science Issues, vol. 2, pp 49-53, 2009.
17. Miguel A. Ferrer, Aythami Morales, Carlos M. Travieso, Jesws B. Alonso, "Low Cost Multimodal Biometric identification System Based on Hand Geometry, Palm and Finger Print Texture", 41st Annual IEEE International Carnahan Conference on Security Technology, Ottawa, Canada, pp 52- 58,October 2007.
18. Jingyan Wang, Yongping Li, Xinyu Ao, Chao Wang, Juan Zhou, "Multimodal biometric authentication fusing iris and palm print based on GMM", IEEE/SP 15th Workshop on Statistical Signal Processing, Cardiff, United Kingdom, pp 349-152, Aug 31st to Sept 3rd, 2009.
19. Fan YANG, Baofeng MA, "Two Models Multimodal Biometric Fusion Based on Fingerprint, Palm-print and Hand-Geometry", First International conference on Bioinformatics and Biomedical Engineering, Wuhan university, China, pp 498-501, July 6th -8th, 2007.
20. Sudeep D.Thepade, Rupali K.Bhondave, "Novel Multimodal Identification Technique using Iris and Palmprint traits with Various Matching Score Level Proportions using BTC of Bit Plane Slices", 2015 International Conference on Pervasive Computing(ICPC), Jan 9th -10th Pune, India, 2015.
21. Maleika Heenaye, Mamode Khan, "A Multimodal Hand Vein Biometric based on Score Level Fusion" International Symposium on Robotics and Intelligent Sensors 2012 (IRIS 2012), Procedia Engineering 41 (2012), pp 897 – 903, 2012.
22. Manisha Madanea, Sudeep Thepadeb, "Score Level Fusion Based Bimodal Biometric Identification Using Thepade's Sorted n-array Block Truncation Coding with varied Proportions of Iris and Palm print traits", 7th International Conference on Communication, Computing and Virtualization 2016, Procedia Computer Science 79 (2016), pp 466 – 473, 2016.
23. M. Monwar, M. Gavrilova, "Markov chain model for multimodal biometric rank fusion", Signal, Image and Video Processing, pp1863–1703, 2011.
24. M. Monwar, M. Gavrilova. "FES: A system for combining face, ear and signature biometrics using rank level fusion", Fifth International Conference on Information Technology: New Generations,(ITNG), pages 922–927, 2008.
25. A. Abaza, A. Ross, "Quality-based rank level fusion in Multibiometric Systems", Proceedings of third IEEE International Conference on Biometrics: Theory, applications and Systems (BTAS), pp1-6, Washington DC, USA, September 2009.
26. Ajay Kumar, Sumit Shekhar, "Palm print Recognition using Rank Level Fusion", Proceedings of 2010 IEEE 17th International Conference on Image Processing, pp 3121-3124, September 26th -29th 2010.
27. Padma Polash Paul, Marina Gavrilova, "Rank Level Fusion of Multimodal Cancelable Biometrics", Proceedings of 13th IEEE International Conference on Cognitive Informatics & Cognitive Computing, pp 80-87,18th -20th Aug 2014.



28. Emanuela Marasco, Arun A. Ross, Carlo Sansone, "Predicting identification errors in a multibiometric system based on ranks and scores", Proceedings of 4th IEEE International Conference on Biometrics: Theory, Applications and Systems (BTAS), (Washington DC, USA), pp 1-6, 27th to 29th September 2010.
29. Linlin She, Li Bai and Zhen Ji, "Hand-based biometrics fusing palm print and finger knuckle-print", First international conference on Emerging techniques and challenges for hand based biometrics, Turkey, pp 153-156, 2010.
30. Qian Tao, Raymond Veldhuis, "Threshold-optimized decision level fusion and its application to biometrics", Pattern Recognition Journal, vol. 42, issue 5, pp 823 –836, 2009.
31. Gholamreza Amayeh, George Bebis, Ali Erol, Mircea Nicolescu, "Handbased verification and identification using palm–finger segmentation and fusion", Computer Vision and Image Understanding Journal, no. 113, pp 477–501, 2009.
32. M. Deepamalar, M. Madheswaran, "An Improved Multimodal Palm Vein Recognition System Using Shape and Texture Features", International Journal of Computer Theory and Engineering, vol. 2, no. 3, pp 1793-8201, June, 2010.
33. S. Bharadwaj, H. S. Bhatt, M. Vatsa, and R. Singh. "Domain specific learning for newborn face recognition". IEEE Transactions on Information Forensics and Security, 11(7):1630–1641, 2016.
34. A. K. Jain, S. S. Arora, K. Cao, L. Best-Rowden, and A. Bhatnagar. "Fingerprint recognition of young children". IEEE Transactions on Information Forensics and Security, 12(7):1501–1514, 2017.
35. S. Tiwari, A. Singh, and S. K. Singh. "Multimodal database of newborns for biometric recognition". International Journal of Bio-Science and Bio-Technology, 5(2):89–100, 2013.
36. P. Basak, S. De, M. Agarwal, A. Malhotra, M. Vatsa and R. Singh, "Multimodal biometric recognition for toddlers and pre-school children," 2017 IEEE International Joint Conference on Biometrics (IJCB), Denver, CO, 2017, pp. 627-633.
37. D. G. Lowe, "Histograms of oriented gradients for human detection" International Journal of Computer Vision, Vol. 1, pp. 886-893, Jun 2005.
38. G. Caenen and L. Van Gool, "Maximum Response Filters for Texture Analysis", 2004 Conference on Computer Vision and Pattern Recognition Workshop, Washington, DC, USA, 2004, pp. 58-58.
39. Jain, Anil & Ratha, Nalini & Lakshmanan, Sridhar. "Object detection using Gabor filters. Pattern Recognition ". 30. 295-309. 10.1016/S0031-3203(96)00068-4, 1997.
40. Jolliffe, Ian & Cadima, Jorge. "Principal component analysis: A review and recent developments". Philosophical Transactions of the Royal Society A: Mathematical, Physical and Engineering Sciences. 374. 20150202. 10.1098/rsta.2015.0202, 2016.
41. Weinberger KQ, Saul LK. "Distance metric learning for large margin nearest neighbor classification". The Journal of Machine Learning Research 2009;10:207-44.
42. McCallum, Andrew & Nigam, Kamal. "A Comparison of Event Models for Naive Bayes Text Classification". Work Learn Text Categ. 752, 2001.
43. Scho'lkopf B, Smola AJ. "Learning with kernels". Cambridge, MA: The MIT Press; 2002.
44. Scho'lkopf BS, Mika CJ, Burges P, Knirsch RR, Muller KG. "Input space versus feature space in kernel-based methods". IEEE Trans Neural Network 1999;10(5):1000–17.
45. Burges CJ, Scho'lkopf B. "Improving the accuracy and speed of support vector machines". Neural Inform Proc Syst 1997;9:375–81.
46. Zanuty EA, Aljahdali S, Cripps RJ. "Accurate support vector machines for data classification". Int J Rapid Manuf 2009;1(2).



Chethan H. K., Completed B.Sc, M.Sc and PhD from from University of Mysore, Karnataka, India. Presently working as Professor at Maharaja Institute of Technology, Thandavapura, Karnataka India. Guiding eight Ph.d Students in several domains. Have guided several projects for bachelors and masters' student. He has published papers in International conferences and Journals.

AUTHORS PROFILE



Bhavya D. N., Completed B.E and M.Tech from in Computer Science from Visvesvaraya Technological University, Karnataka, India. Presently She is pursuing Ph.D. at University of Mysore, Karnataka. Her research interest includes image processing, pattern recognition and Multimodal Biometrics.