

# CNN Architectures: Alex Net, Le Net, VGG, Google Net, Res Net

M. Swapna, Yogesh Kumar Sharma, B M G Prasad

**Abstract:** Convolutional Neural Networks (CNNs) are a floating area in Deep Learning. Now a days CNNs are used inside the more note worthy some portion of the Object Recognition tasks. It is used in stand-out utility regions like Speech Recognition, Pattern Acknowledgment, Computer Vision, Object Detection and extraordinary photograph handling programs. CNN orders the realities in light of an opportunity regard. Right now, inside and out assessment of CNN shape and projects are built up. A relative examine of different assortments of CNN are too portrayed on this work.

**Keywords:** Convolutional Neural Network Architecture, ANN, Lenet-5.

## I. INTRODUCTION

Deep Learning is a more extensive class of device considering which will carry insight to the machines. These days Deep Learning is extensively utilized for Object Recognition, Pattern Acknowledgment, Natural Language Processing and other photo handling obligations. In any case, for the most part it's far used in Object Acknowledgment obligations, for example, Driver help frameworks, Self-ruling Driving gadget, Target Detection[1] and so on. In real life. In any case, it has additionally a couple of various intriguing applications like Colorization of Black and White Images, Adding Sounds To Quiet Movies, Automatic Machine Translation, Object Grouping in Photographs, Automatic Handwriting Age, Character Text Generation, Image Caption Age and Automatic Game Playing. For the most segment, profound Learning can be practiced with the help of different Neural Network Architectures[2]. These Systems are basically utilized for trademark extraction and preparing. There are four Major Neural Networks used in Deep Learning.

They're Unsupervised Pretrained Networks (UPNs), Convolutional Neural Networks (CNNs), Recurrent Neural Systems, Recursive Neural Networks. Unaided Pretrained systems are grouped into Auto encoders, Deep Conviction Networks (DBNs), Generative Adversarial Networks (GANs). DBNs are remarkable sort of system while in transit to precisely separates better degree highlights. GANs are prevalently utilized inside the districts of Sound, Video and Text extraction. CNNs are the inclining network structure in

Profound Learning. It will remove data with the guide of rehashed convolutions. For the most part it's far utilized in object acknowledgment obligations. We will give a clarification to roughly CNN in component in Chapter-2. Intermittent Neural Networks are inside the equivalent class of Feed-Forward Neural Networks. For the most part these sorts of systems are extremely hard to educate. In any case the ongoing advances in Deep Learning will improve it. It can be utilized for Time-arrangement expectation, Video investigation and Music records recovery. Recursive Neural Networks have the ability to address various leveled frameworks inside the dataset. In any case here crucial difficulty is the recursive idea of the system. It will make a few disarrays in the preparation time. These days Deep Learning has exceptionally essentialness, all things considered, since it will in general be applied in combination of fields of studies. Right now, way to deal with present a nitty lumpy summation of various Convolutional Neural Networks which can be applied in Deep Learning. This artistic creations contains structure of CNN, extraordinary designs of CNN and its programs.

## II. CONVOLUTIONAL NEURAL NETWORK

This section includes Structure of CNN and it's working. Before managing CNN we need to examine about Artificial Neural Networks.

### A) ANN

Artificial Neural Network[20] is a figuring structure made up of differing honest, exceptionally interconnected handling components, which method information with the guide of their dynamic state response to external realities assets.

### 1) Basic Structure Of Ann

The chance of ANNs depends at the conviction that working of human cerebrum with the guide of affecting the reasonable foundations, to might be imitated utilizing silicon and wires as abiding neurons and dendrites. The human cerebrum is included 86 billion nerve cells known as neurons. They are related with other thousand cells by utilizing Axons. Redesigns from external circumstance or commitments from material organs are related with the guide of dendrites. These assets of data make electric controlled main thrusts, which quickly venture through the neural contraption. A neuron would then have the option to send the message to various neuron to manage the issue or doesn't transport it forward. The human neuron gadget is represented in Fig.1[20]. ANNs are produced using differing hubs, which proliferation regular neurons of human mind.

**Revised Manuscript Received on March 30, 2020.**

\* Correspondence Author

**M.Swapna, Research Scholar**, Department of CSE, JJT University, Jhunjhunu, Rajasthan, India. Email: [raviralaswapna@gmail.com](mailto:raviralaswapna@gmail.com)

**Dr.Yogesh Kumar Sharma, Associate Professor**, Department of CSE, JJT University, Jhunjhunu, Rajasthan, India. Email: [dr.sharmayogeshkumar@gmail.com](mailto:dr.sharmayogeshkumar@gmail.com)

**Dr. BMGPrasad, Professor**, Department of CSE, Holy Mary Institute, Hyderabad, India. Email: [bmgprasad@gmail.com](mailto:bmgprasad@gmail.com)

The neurons are related by associations and that they interface with each other. The hubs can take input realities and do principal obligations at the measurements. The delayed consequence of those exercises is given to exceptional neurons. The yield at every hub is called its enactment or hub charge.

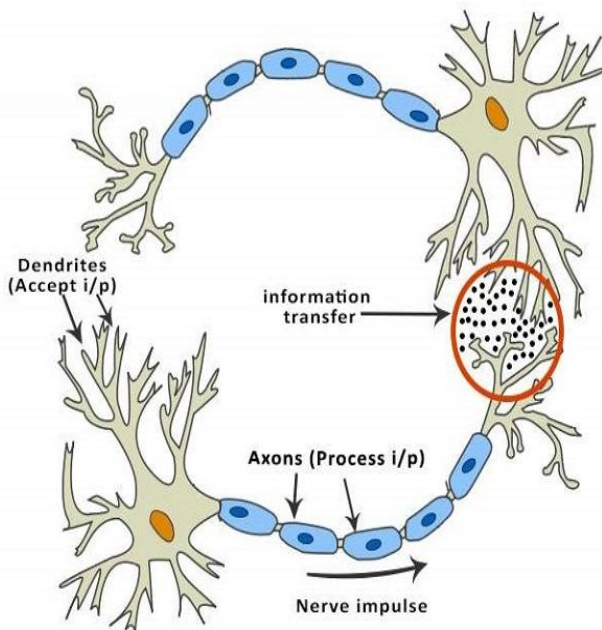


Fig 1. Human Neuron System

**2) Types Of Artificial Neural Networks:**

There are Fake Neural Network topologies Feed Forward and Input. In Feed Forward ANN, the records circle is unidirectional. A unit sends measurements to various unit from which it doesn't get any insights. There are no comments circles. They are applied in test age/acknowledgment/classification. They have settled assets of enter and outputs. Fig.2 explanation of ANN [20].

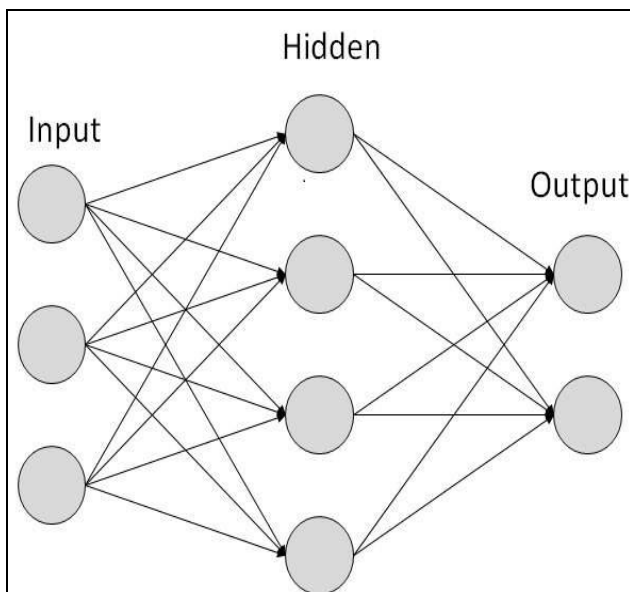


Fig 2. Structure of ANN

**3) Machine Learning In Ann**

Learning in ANNs can be typically ordered into 3. Managed Learning, Solo Learning and Reinforcement Learning. In Supervised Learning, it incorporates an instruction calculation to show the realities. For instance, the preparation calculation will instruct ANN with certain answers. The system at that point surmises with preparing set of rules' exact arrangement and making fundamental arrangements.

Unaided Learning doesn't offer an instruction set of rules for the measurements. Here records are marked principally dependent on similitude. Bunching and gathering are notable instances of Solo Learning. In Reinforcement Learning, the system change the appropriate response by utilizing comment. At the point when the announcement is poor, the network adjust its weight to settle on decisions.

**4) Applications Of Ann**

Significant Applications of ANN are in the fields of Aerospace, Automotive, Military, Electronics, Money related, Industrial, Medical, Telecommunications, Transportation, Anomaly Detection, etc

**B) CNN**

Convolutional Neural Networks(CNNs)[21] are manufactured neural systems which can be applied basically to association depictions (as an example name what they see), bundle them by means of similarity (picture appearance), and perform thing affirmation inside scenes. They are figuring's which can recognize faces, people, road side effects, tumors, platypuses and various outstanding segments of noticeable information. Convolutional systems do optical man or lady prevalence (OCR) to digitize content material and make NLP practical on basic what's more, physically composed audits, in which the pix are images to be deciphered. CNNs can moreover be associated with sound at the point when it's miles addressed apparently as a spectrogram. All the more prominent as of past due, convolutional systems have been associated exceptionally to content material test essentially as graph realities with outline convolutional systems. The feasibility of convolutional nets (ConvNets or CNNs) in photo affirmation is one of the main reasons why the world has woken up to the sufficiency of profound finding a workable pace.

They are controlling huge advances in Computer Vision (CV), which has prominent bundles for self-driving cars, practice mechanical technology, rambles, security, helpful ends, and tranquilize medicines for the ostensibly debilitated. Convolutional neural systems ingest and method photos as tensors, and tensors are structures of numbers with more noteworthy dimensions. They can be hard to look at, so we should technique them with the guide of comparability. A scalar is just various, for instance, 7; a vector is an overview of numbers (e.g., [7,8,9]); and a network is a square lattice of numbers concerning a few follows and areas like a spreadsheet. Geometrically, inside the occasion that a scalar is a zero-dimensional factor, a vector is a one dimensional line, a network is a - dimensional airplane, a pile of structures is a three-dimensional 3Dcube,and when each component of these networks has a heap of highlight maps attached to it, you input the fourth measurement.

### C) Structure Of Cnn

We understand that CNN are successful for Image Recognition what's more, Classification. So it might be utilized for making sense of countenances, things and guests side effects separated from driving innovative and farsighted in robots what's more, self utilizing vehicles. The Structure of CNN is Illustrated in Fig. 3[21]. Convolutional Neural Networks are made out of various layers. They're, 1) Convolution Layer 2) Non Linearity (ReLU) 3) Pooling or Sub Sampling Layer 4) Fully Associated Layer

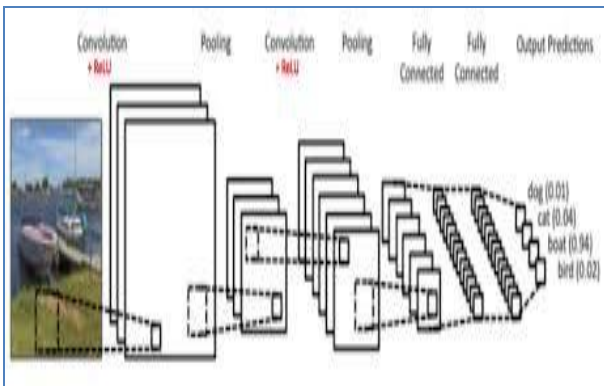


Fig 3. Structure of CNN

#### 1) Convolution Layer

The fundamental job of Convolution if there ought to find a good pace of a CNN is to remove highlights from the enter picture. Convolution spares the spatial association among pixels by finding a good pace abilities using little squares of information records. We gained dive into the numerical nuances of Convolution directly here, yet will undertaking to peer how it includes over pics. As we noted ahead of time an Image can be spoken to as framework. Here we are considering a parallel picture wherein network comprises of values zero or 1.

#### 2) RLU

ReLU is a Non-Linear activity which replaces all horrendous pixel esteems inside the include map by zero. The inspiration at the rear of ReLU is to blessing nonlinearity inside the CNN, for the explanation that increasingly a piece of this true information we'd need our CNN to learn may be nonlinear. ReLU activity can be represented[21] as, It is additionally called Sub sampling or Down sampling or Spatial-Pooling. It lessens the dimensionality of each capacity map anyway holds the most extreme basic records.

#### 3) Max pooling

Max pooling can be of various sorts like aggregate, normal furthermore, at the most. On the off chance that there need to find a good pace of Max Pooling, we describe a spatial network (for example, a 2 x 2 window) and take the most significant issue from the corrected include map in that window. Instead of taking the greatest viewpoint we could similarly take the ordinary (Average Pooling) or general of all added substances in that window. By and by means of, max Pooling has been appeared to works of art higher.

Here a 2 x 2 guide is moved over the total capacity map and most extreme expense from each spot is picked then new sub sampled work map is created. Pooling did to redressed highlight guide can be visualized[21], For the most part Max

pooling are utilized for makes the information portrayals littler and increasingly possible, diminishes the wide assortment of parameters and calculations in the network, consequently, controlling over fitting.

#### 4) Fully connected layers

Completely Connected Layer is utilized for classification undertakings. It utilizes softmax initiation work for type. The articulation "Completely Connected" proposes that each neuron inside the past layer is identified with each neuron on the consequent layer. The yield from past layers establish better degree capacities. The essential circumstance of this layer is to characterize the info picture essentially dependent on the more significant level capacities. For instance, picture classification undertaking of grouping canine, feline, vessel and flying creature is represented.

### III. CNN ARCHIECTURES

Right now, can talk about different Convolutional Neural Network structures and the investigations works which utilized those structure. Convolutional Neural Networks are advanced during that time to upgrade their general execution. Each engineering will vacillate from no. Of layers utilized, no. Of channels utilized for convolution and its intricacy. Here we can analyze every engineering on the reason of triumphing ImageNet Large Scale Visual Recognition Competition(ILSVRC)[22].

#### 1)LeNet-5

LeNet-five, an initiating 7-degree convolutional coordinate with the guide of LeCun et al in 1998, that organizations digits, was connected through a hardly any banks to see interpreted numbers on (tests) digitized in 32 x 32 pixel grayscale input pix. It changed into the most ordinary structure utilized by analysts for object location.Fig 4 in [22].

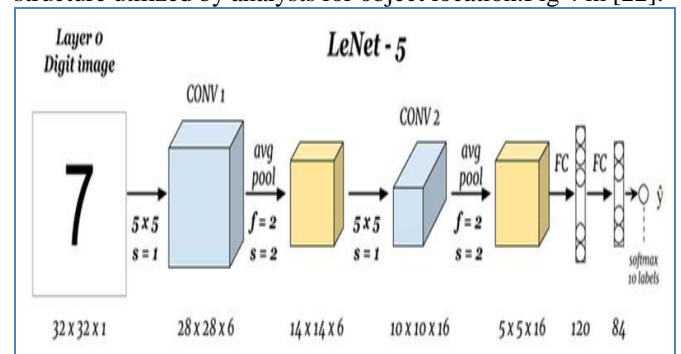


Fig 4.LeNet-5 Architecture

From the structure, It is obvious that the general idea at the rear of the arrangement is to play out different convolutions with max pooling between two exercises and interfacing the remaining convolutional layer by means of completely related layers to the yield layer. Since all convolutional and pooling layers utilize a walk around one and no cushioning, the components of each measurement is blurred through four in the midst of each convolution what's extra, is sliced up through each pooling movement.


LeNet-5 engineering transformed into utilized for separating the highlights of Brain Computer interface[3] through considering the basic spatial styles (CSPs) calculation.



Be that as it may, the essential difficulty occurred here turned into the mean exactness procured with the guide of the adjusted system is lower than the one of a kind exactness.

**2) AlexNet**

The machine had a fundamentally like format as LeNet by utilizing Yann LeCun et al. Anyway become additional profound, with more prominent diverts with regards to layer, and with stacked convolutional layers. AlexNet become included 2012 through Alex Krizhevsky, Geoffrey Hinton and Ilya Sutskever. Fig 5 in [22].

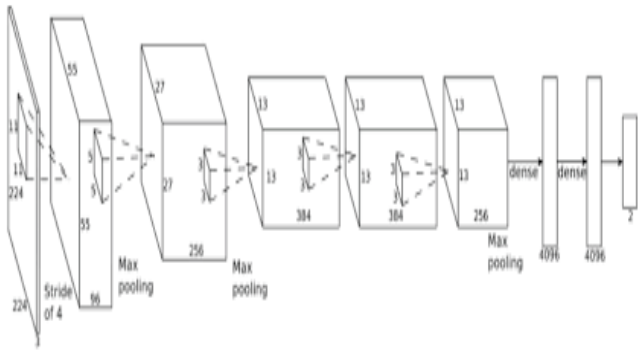


**Fig 5: AlexNet Architecture**

AlexNet is most likely the greatest successful execution of CNNs up to this point. It conquered customary procedures to protest location. As we see it is like LeNet-five, yet varies in utilizing different parameters. It contained 11x11, 5x5, 3x3, convolutions, at the most pooling, dropout, measurements expansion, ReLU incitation's, SGD with pressure. It annexed ReLU authorizations after each convolutional and totally connected layer. AlexNet become planned through the Super Vision association, comprising of Alex Krizhevsky, Geoffrey Hinton, and Ilya Sutskever. AlexNet changed into applied for distinguishing the parallel separation among vehicles [4]. This works of art has been viably done utilizing AlexNet because for effectiveness, picture squares had been looked inside the database, therefore the combination time changed into not tormented by comparability esteems. Subsequently, it changed into plausible to combine an enormous amount of super pictures in a short time. Rather than the utilization of a particular dataset, a constant dataset changed into utilized on this circumstance. ZFNet picked up the ILSVRC one year after AlexNet in 2013. It became for the most segment an achievement by methods for tweaking the hyper-parameters of AlexNet while keeping up indistinct structure with additional Deep Learning segments from referenced sooner than on this work.

**3) ZFNet & OverFeat**

ZFNet propelled a technique for imagining convolutional neural systems. It is called De-Convolutional Neural Network. It basically inverse of the CNN which makes mapping abilities to pixels. Fig. 6 in [22].

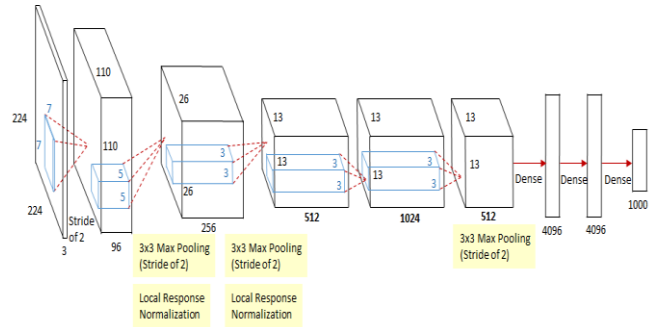


**Fig 6: ZFnet Architecture**

Over Feat won ILSVRC 2013 that is a lot of like AlexNet. Be that as it may the thing that matters is that AlexNet utilizes jumping boxes for class while Over Feat utilized restrict a given thing at several regions and scales and consolidates these yields to get the rest of the outcomes.

**4) Google Net**

The victor of the ILSVRC 2014 task was Google Net(a.K.A. Commencement V1) from Google. It completed a top notch 5 screw up pace of 6.Sixty seven%. This become close to human level execution which the facilitators of the check have been by and by constrained to evaluate.

This gadget changed into an improvement of the AlexNet that was bounty moreover notwithstanding blurred the measure of parameters. It included Inception module which grant a system to perceive styles of different sizes inside a similar layer. The graduation module performs out a not many convolutions with various responsive fields in equal and unites the results by consolidating the profundity cuts of the various channels into one unmarried layer. Fig.7 in[22].

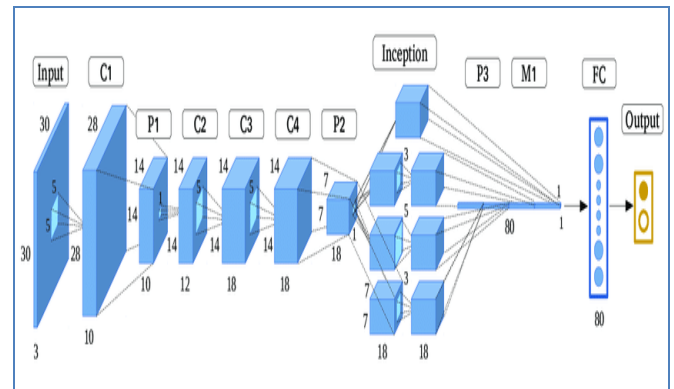

**Fig 7: Google Net Architecture**

The end Google Net created from a couple of such beginning modules stacked more than each other with coincidental pooling layers inside the focal point of, more than one more convolutional layers inside the start of the gadget and a couple totally related layers preceding the yield layer. The Google Net in like manner contained more prominent yield layers closer to the focal point of the device and their yields were gotten together with the yield of the last layer of the gadget to get the entirety desire. This had a couple of minor impact on the generally speaking result yet changed into usually proposed to stimulate the creation prepared of past layers

### 5)VGGNet

The sprinter up on the ILSVRC 2014 undertaking is called VGGNet by the system and become made by Simonyan and Zisserman. VGGNet joins of sixteen convolutional layers and is remarkably appealing a final product of its exceedingly uniform engineering. In most recent years, VGGnet is the greatest renowned engineering utilized inside the control of Deep Learning. It is like AlexNet having 3 x 3 convolutions anyway having a lot of channels. It is at present the greatest wanted decision inside the network for removing capacities from pix. Fig.8 in[22].

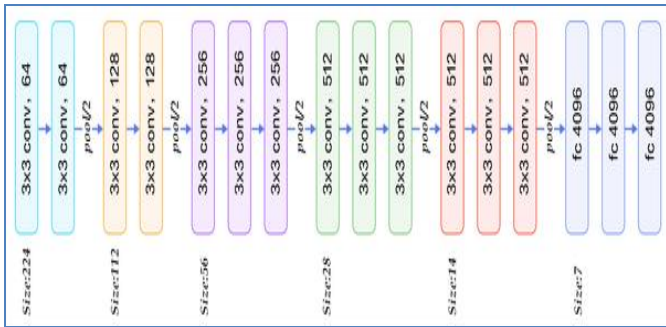


Fig 8. VGGNet Architecture

From the structure, It is obvious that the general idea at the rear of the arrangement is to play out different convolutions with max pooling between two exercises and interfacing the remaining convolutional layer by means of completely related layers to the yield layer. Since all convolutional and pooling layers utilize a walk around one and no cushioning, the components of each measurement is blurred through four in the midst of each convolution what's extra, is sliced up through each pooling movement.

The heap arrangement of the VGG Net is uninhibitedly reachable and has been applied in various unique bundles and troubles as a benchmark comprise of extractor. Be that as it may likewise, VGG Net suits of 138 million parameters, which might be very looking at to adapt to. VGG Net used in such huge numbers of profound finding a good pace. Dazzle Image Quality prediction[5] is a fine artworks wherein it outflanked every conventional system. In any case, here the issue became experiences the over fitting inconvenience principle to a debasement of generally execution.

Finger Vein essentially based Biometric Authentication[6] turned into an awesome idea which achieve extra than ninety five% impacts on the whole datasets.

Break Detection[7] changed into each other imperative utility applied utilizing VGG Net in which it met competent to adapt to boisterous splits. Fundamental prevention of VGG Net changed into the usage of enormous no. Of parameters as we referenced ahead of time. [8] is an occasion for this downside.

We realize that VGG Net most generally utilized for Object Identification. Item Tracking [9] is a sub-subject of Object Identification which accurately used this structure in an incredible way. These days such huge numbers of studies works are done in the region of Intelligent Transportation Systems. Self Driving Car Navigation [10] is an important programming of it. It adequately utilized VGG Net however the issue become dig cam inactivity.

### 6) Res Net

Remaining Neural Network was brought by utilizing Kaiming He et al with "skip connections" and capacities overwhelming bunch standardization in 2015. Such pass organizations are in some other case alluded to as gated gadgets or gated intermittent devices and have a solid likeness to later productive added substances associated in RNNs. In view of this machine they could assemble a NN with 152 layers even as however having lower unusualness than VGG Net. It achieves a fine five bungle pace of three. Fifty seven% which beats human-organize execution on this dataset. Its structure outlined in Fig.9 in[22].

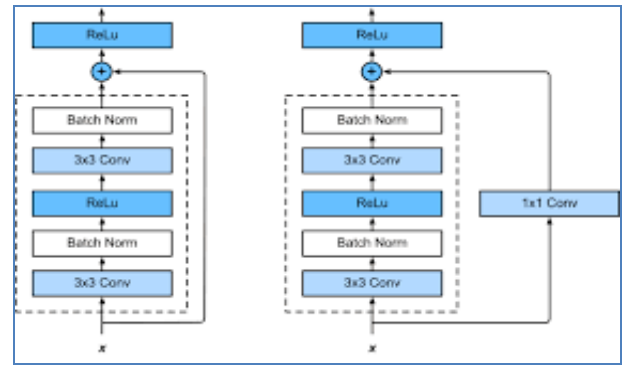



Fig 9:ResNet Architecture

Res Nets are begun the utilization of broadly for a few research works like[11]. Right now acquaints skip-layer associations with gain both quicker union in preparing and better execution. [12] proposes a reflection end framework by utilizing this structure. In that case network is extraordinary and incredible for reflected picture end.

### 7) Inception

Origin v4 become an adjustment of Google Net. It included a few layers to the system. It utilized 3 outstanding types of origin modules. In lease times this structure is productively used in[13] which has preferable precision over VGG Net and Inception-v3. Likewise utilized in [14] to find nourishing expense in nourishment. Commencement Res Net presented as a blend of Inception network and Residual Network. By utilizing joining the beginning module and leftover association as demonstrated .

This system is additional green and efficient than Inception System. The 2d region inside the 2016 ILSVRC grouping challenge transformed into finished by means of Res Net. It joins the last framing squares and relationship of Res Nets with the parallelization procedure of initiation frameworks.Fig 10 in [22].

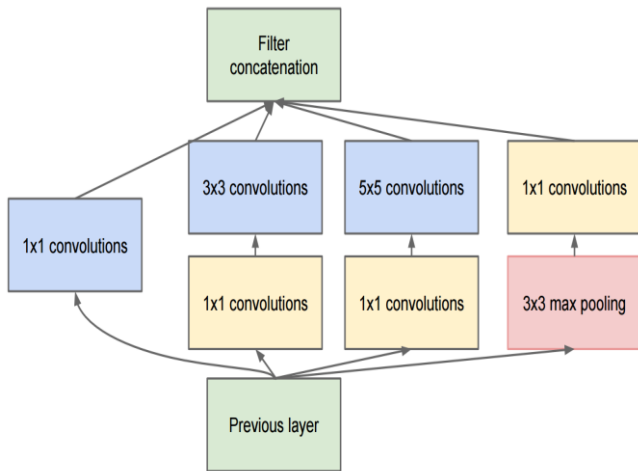


**Fig:10 Inception Architecture**

8)Dense Net

Dense Nets be a piece of the two yields with the guide of depth wise channel interface, as completed in origin modules. Additionally, Dense Nets are which incorporates one such relationship from each layer to each resulting one with organizing input sizes.

Accordingly, the proficient abilities of a layer can be reused by utilizing any of the going with layers. Along these lines, later layers need to make a lot less viewpoint maps, achieving less flighty frameworks with less parameters. Since the width and stature of layers in CNNs are gradually reducing, interfacing each unmarried immaculate layer is apportioning the sort out into Dense Blocks. Between those squares, pooling layers are used to change the sizes in like way. These layers are suggested as Transition Layers. [15] used Dense Net for spotting 3-D activities. Fig.11 in [22].

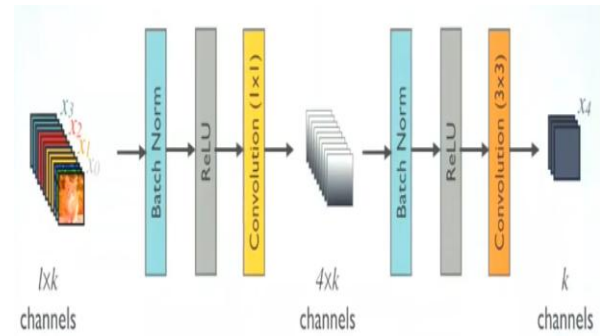

**Fig :11 Dense Net Architecture**

Double Path Network (DPN) increased first region inside the 2017 ILSVRC limitation crucial finished zenith 3 in each class and recognition. To take on the structures, the yield of a layer is part and one stage is gotten together with a extreme association, however the option is dispatched to each unmarried coming about layer, as completed in Dense Nets.

**IV. CONCLUSION**

Right now, got referenced roughly different sorts of Convolutional Neural Networks. The various sorts are LeNet-five, Alex Net, ZFNet and OverFeat, Google Net or Initiation, VGG Net, Res Net, Inception-v4, Dense Net and so on. Working and development of explicit types of CNN are portrayed. A near investigation of different systems is completed and verified that VGG Net is the most applied sort of CNN. However, it become investigated that CNNs like Res Net and Dense Net are outflanked VGG Net based on Image Net Large Scale Visual Recognition Challenge (ILSVRC). The results of a comparison as shown in below Table.1

**Table1. The result of comparison**

CNN NETWORK /YEAR/LAYERS	DEVELOPED BY	ERROR RATE	TRAINED IMAGES	DATASET
LENET-5 -1998	YANN LECU ET AL	1.10%	60 THOUSANDS	MNIST
ALEXNET-8 -2012	ALEX KRIZHEVSKY, IYA SUTSKEVER, GEOFFREY HINTON	15.40%	15 MILLION	IMAGENET
ZFNET -2013	ZEILER MATHEW,ROBFERGUS	11.20%	1.3 MILLION	IMAGENET
VGG NET-19 -2014	KAREN SIMONPN,ANDREW ZISSORAN	7.30%	138 MILLION	IMAGENET
GOOGLE NET-22 -2015	ANDREA VEDALDI AND ANDREW ZISSERMAN	6.70%	1.2 MILLION	IMAGENET,PLACES365
RESNET -2015	KAIMING HE	3.60%		IMAGE NET



## REFERENCES

1. Srinivas S. S. Kruthiventi , Kumar Ayush , R. Venkatesh Babu "DeepFix: A Fully Convolutional Neural Network for Predicting Human Eye Fixations",IEEE Transactions on Image Processing ,Vol. 26(9), pp. 4446 - 4456, Sept. 2017 .
2. Zhang Bo ; Zhang Ling. "The analysis and improvement of artificial neural network models,"in 1997 IEEE International Conference on Intelligent Processing Systems (Cat. No.97TH8335), Oct. 1997.
3. Siavash Sakhavi, Cuntai Guan , Shuicheng Yan, "Learning Temporal Information for Brain-Computer Interface Using Convolutional Neural Networks," IEEE Transactions on Neural Networks and Learning Systems , vol. 29(11), pp. 5619 - 5629, March 2018.
4. Xiang Zhang , Wei Yang , Xiaolin Tang , Yun Wang,"Lateral distance detection model based on convolutional neural network,"IET Intelligent Transport Systems, vol. 13(1), pp. 31 - 39, Jan 2019
5. Jongyoo Kim , Anh-Duc Nguyen , Sanghoon Lee,"Deep CNN-Based Blind Image Quality Predictor",IEEE Transactions on Neural Networks and Learning Systems, vol. 30(1), pp. 11 - 24, June 2019.
6. Rig Das , Emanuela Piciuccio , Emanuele Maiorana , Patrizio Campisi, "Convolutional Neural Network for Finger-Vein-Based Biometric Identification," IEEE Transactions on Information Forensics and Security, vol. 14(2), pp. 360 - 373, Feb. 2019.
7. Qin Zou , Zheng Zhang , Qingquan Li , Xianbiao Qi , Qian Wang , Song Wang, "DeepCrack: Learning Hierarchical Convolutional Features for Crack Detection", IEEE Transactions on Image Processing, vol. 28(3), pp. 1498 - 1512, Oct. 2018.
8. Zhen Dong , Zheng Zhou , Zefan Li , Chen Liu , Peng Huang , Lifeng Liu , Xiaoyan Liu, "Convolutional Neural Networks Based on RRAM Devices for Image Recognition and Online Learning Tasks,"IEEE Transactions on Electron Devices, vol.66(1), pp.793 - 801, Dec.2018.
9. Xiaopeng Hu , Jingting Li , Yan Yang , Fan Wang,"Reliability verification-based convolutional neural networks for object tracking,"IET Image Processing, vol. 13(1), pp. 175 - 185, Dec. 2018.
10. Truong-Dong Do , Minh-Thien Duong , Quoc-Vu Dang , My-Ha Le, "Real-Time Self-Driving Car Navigation Using Deep Neural Network," in 2018 4th International Conference on Green Technology and Sustainable Development (GTSD), 23-24 Nov. 2018.
11. Yue Li , Dong Liu , Houqiang Li , Li Li , Zhu Li , Feng Wu, "Learning a Convolutional Neural Network for Image Compact-Resolution,"IEEE Transactions on Image Processing , vol. 28(3), pp. 1092 - 1107, sept. 2018.
12. Yakun Chang , Cheolkon Jung "Single Image Reflection Removal Using Convolutional Neural Networks,"IEEE Transactions on Image Processing, vol. 28(4), pp. 1954 - 1966, Nov. 2018.
13. Omer Deperlio glu , Utku Kose "Diagnosis of Diabetic Retinopathy by Using Image Processing and Convolutional Neural Network,"in 2018 2nd International Symposium on Multidisciplinary Studies and Innovative Technologies (ISMSIT), 19-21 Oct. 2018
14. Raza Yunus ; Omar Arif ; Hammad Afzal ; Muhammad Faisal Amjad ; Haider Abbas ; Hira Noor Bokhari ; Syeda Tazeen Haider ; Nauman Zafar ; Raheel Nawaz, " A Framework to Estimate the Nutritional Value of Food in Real Time Using Deep Learning Techniques ",in IEEE Access, vol.7, pp. 2643 - 2652, Dec. 2018.
15. Chuankun Li , Yonghong Hou , Pichao Wang , Wanqing Li, "MultiviewBased 3-D Action Recognition Using Deep Networks ",IEEE Transactions on Human-Machine Systems, vol. 49(1), pp. 95 - 104, Dec. 2018.
16. Armin Kappeler , Seunghwan Yoo , Qiqin Dai , Aggelos K. Katsaggelos "Video Super-Resolution With Convolutional Neural Networks,"IEEE Transactions on Computational Imaging , vol. 2(2) ,pp. 109-122, June 2016.
17. Chenhao Lin , Ajay Kumar "A CNN-Based Framework for Comparison of Contactless to Contact-Based Fingerprints",IEEE Transactions on Information Forensics and Security, vol. 14(3), pp.662-676, July 2018.
18. GuangYang,HaiBoHe,QianChen"Emotion-Semantic-EnhancedNeural Network",IEEE/ACM Transactions on Audio, Speech, and Language Processing , vol. 27(3), pp. 531 - 543, March 2019.
19. Michael G. Bechtel , Elise Mcellhiney , Minje Kim , Heechul Yun, "DeepPicar: A Low-Cost Deep Neural Network-Based Autonomous Car",2018 IEEE 24th International Conference on Embedded and RealTime Computing Systems and Applications (RTCSA), 28-31 Aug. 2018.
20. [https://www.tutorialspoint.com/artificial\\_intelligence/artificial\\_intelligence\\_neural\\_networks.htm](https://www.tutorialspoint.com/artificial_intelligence/artificial_intelligence_neural_networks.htm).
21. <https://ujwalkarn.me/2016/08/11/intuitive-explanation-convnets/>

22. <https://medium.com/@sidereal/cnns-architectures-lenet-alexnet-vgg-goo-glenet-resnet-and-more-666091488df5>
23. Felix Altenberger, Claus Lenz,"A Non-Technical Survey on Deep Convolutional Neural Network Architectures",in arXiv.org , 6 Mar 2018
24. Swapna, M., Yogesh Kumar Sharma, and B. M. G. Prasad. "A Survey on Face Recognition Using Convolutional Neural Network." *Data Engineering and Communication Technology*. Springer, Singapore, 2020. 649-661.
25. Dr. Yogesh Kumar Sharma and Ravindra Singh Rathore, "Fabrication Analysis For Corner Identification Using Algorithms Increasing The Production Rate", "International Journal on Computer Science and Engineering (IJCSE)",ISSN: 0975-3397 Vol. 9 No.05 May 2017, Pp. 248-256.
26. Dr. Yogesh Kumar Sharma and Ravindra Singh Rathore, "Advanced Grading System for Quality Assurance of Ceramic Tiles based using Digital Image Processing", "Indian JournalofScienceandTechnology",ISSN(Online):0974-5645,(Print):0974-846,Vol10(14),DOI:10.17485/ijst/2017/v10i14/112248, April 2017, Pp. 1-4.

## AUTHORS PROFILE



**M. Swapna, Research Scholar**, Department of CSE at Shri Jagdishprasad Jhabarmal Tibrewala University", Chudela, Jhunjhunu (Rajasthan). I completed my M.C.A, from Osmania University, M.Tech.-CSE from JNTU, HYD, doing PhD-CSE in Shri Jagdishprasad Jhabarmal Tibrewala University. I have the 15 years teaching Experience. I am good in programming language like java, python, web programming and certified as a BIG DATA Developer and recently achieved NPTEL certificate in JAVA, I got Best faculty award from Indian Servers, I was a project coordinator . In research 2 springer papers 9 papers in International Journal. I guided for M.Tech projects also. My research areas are Big Data , Image Processing , Mobile Computing ,Machine Learning,Data Mining, Cloud Computing.



**Dr. Yogesh Kumar Sharma**, Presently working as a Associate Professor (HOD / Research Coordinator) Department of Computer Science Engineering and IT at Shri Jagdishprasad Jhabarmal Tibrewala University", Chudela, Jhunjhunu (Rajasthan). He completed his B.Sc with Computer Application in the year of 2002 awarded from S.M.L. (P.G.) College, Jhunjhunu, University of Rajasthan, M.C.A from Modi Institute of Management and Technology, Kota, University of Kota, Kota in the year 2005, Ph.D. in Faculty of Computer Science, from Shri Jagdishprasad Jhabarmal Tibrewala University", Jhunjhunu (Rajasthan) in the year 2014. His research areas Data Communication & Networking, Operating System, Computer Organization and Architecture , Data mining, Cloud Computing, Software Engineering etc. In his research life he Published 4 books & 75 Papers in National and International journals, 25 National and International conferences, 03 workshops. Under his guidance 05 research scholars awarded Ph.D. Presently 08 research scholars working under his guidance. He invited as a Guest Lecturer for Students in M.Sc. I.T. (Master Program in Information Technology) on the behalf of National University of Science and Technology, Muscat, Oman, Nov. 2019. He is Paper Setter, Answer Sheet Evaluator (Copy Checker) and Practical Examiner in University of Rajasthan, Jaipur, Pandit Deendayal Upadhyay University (Shekhawati University), Sikar, Maharaja Ganga Singh University, Bikaner, University of Kota, Kota, Board of Secondary Education Rajasthan, Ajmer. Ph.D. Thesis Evaluator and Ph.D. Final Viva-Voce Examiner in OPJS University, NIMS University, Mewar University. Published 2 patents on Title: Parallel Processing System to Reduce Complexity in Data-Mining of Industrial & Social Big-Data. And Title: Computer Implemented Method for Detecting Downlink Control Channel in Long Term Evolution Wireless Communication. He has a member of IAENG, IACSIT, CSTA and UACEE.



**Dr. B.M.G Prasad** presently serving as professor in computer science and engineering and Deccan PG courses at holy Mary technology and science , Hyderabad , telangana . Previously , he worked as principal in DR K.V shubba reddy collage engineering for women , Kurnool A. P. He is having 18+ teaching experience in various engineering collages . He has done B.E at Vijay nagar engineering collage , bellary in

july 1997 . He completed his M.TECH ata J.N.T.U collage of engineering , anatapur in January 2003 . He completed his P.H.D in computer science of engineering from C.M.J University , Meghalaya state in February 2013 .